


HIGH VOLTAGE SWITCHING APPLICATION.

FEATURES


- High Voltage : $V_{CEO}=-150V$.
- High Transition Frequency : $f_T=120MHz(Typ.)$.
- 1W (Monunted on Ceramic Substrate).
- Small Flat Package.
- Complementary to KTC4372.

MAXIMUM RATING ($T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-150	V
Collector-Emitter Voltage	V_{CEO}	-150	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-50	mA
Base Current	I_B	-10	mA
Collector Power Dissipation	P_C	500	mW
	P_C^*	1	W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55~150	$^{\circ}C$






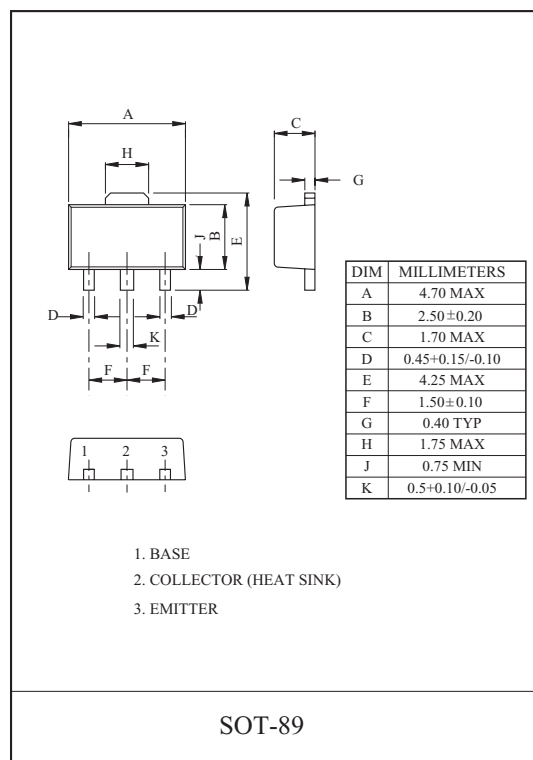
 P_C^* : KTA1660 mounted on ceramic substrate (250mm²x0.8t)

Marking

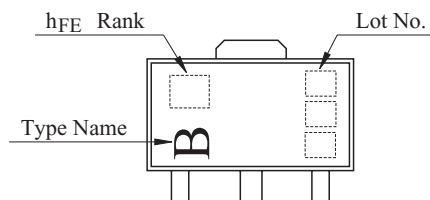
ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=-150V, I_E=0$	-	-	-0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=-5V, I_C=0$	-	-	-0.1	μA
DC Current Gain	$h_{FE} (Note)$	$V_{CE}=-5V, I_C=-10mA$	70	-	240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-10mA, I_B=-1mA$	-	-	-0.8	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=-5V, I_C=-30mA$	-	-	-0.9	V
Transition Frequency	f_T	$V_{CE}=-30V, I_C=-10mA$	-	120	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=-10V, I_E=0, f=1MHz$	-	4.0	5.0	pF

Note : h_{FE} Classification O:70~140, Y:120~240

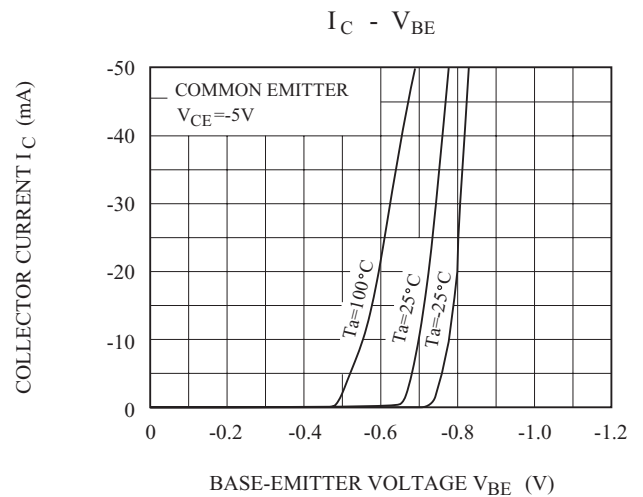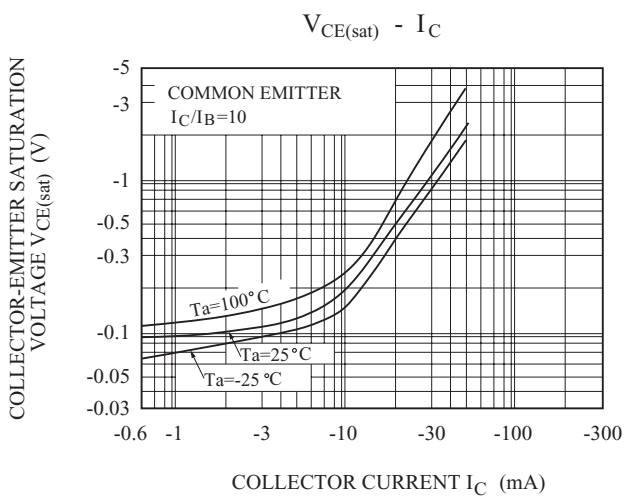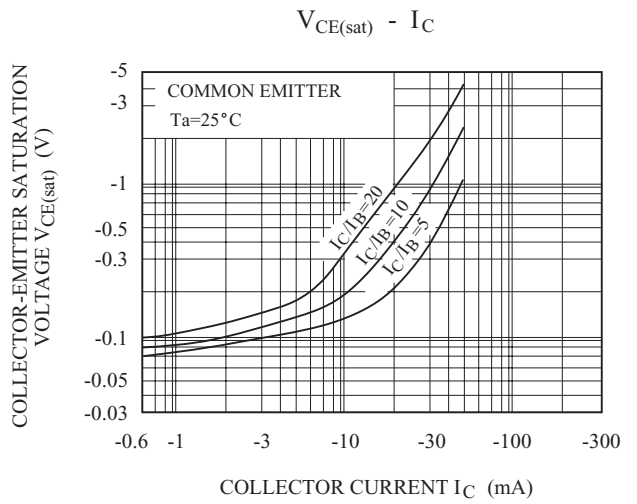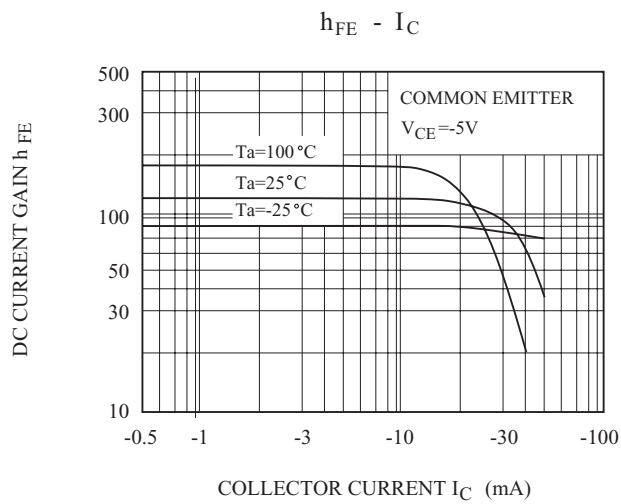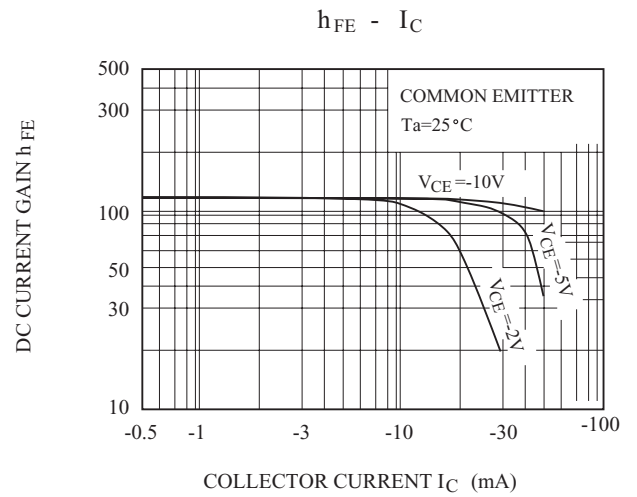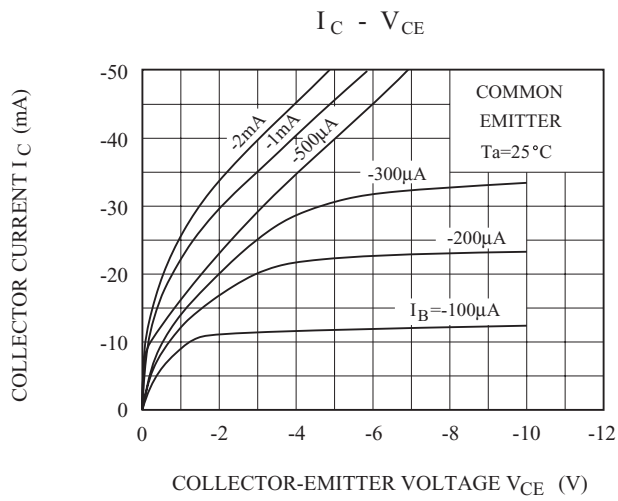

SAFE OPERATING AREA

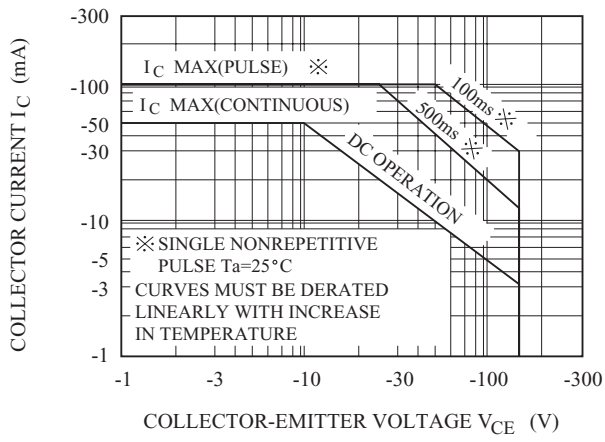

$P_c - T_a$

