


GENERAL PURPOSE APPLICATION.

FEATURES

- High Breakdown Voltage : $V_{CE0}=100V$.
- Low Collector Saturation Voltage : $V_{CE(sat)}=2.0V(\text{Max.})$.
- Complementary to KTA1038.

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	100	V
Collector-Emitter Voltage	V_{CEO}	100	V
Emitter-Base Voltage	V_{EB0}	5	V
Collector Current	I_C	5	A
Emitter Current	I_E	-5	A
Base Current	I_B	0.5	A
Collector Power Dissipation (Tc=25°C)	P_C	40	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 ~ 150	°C

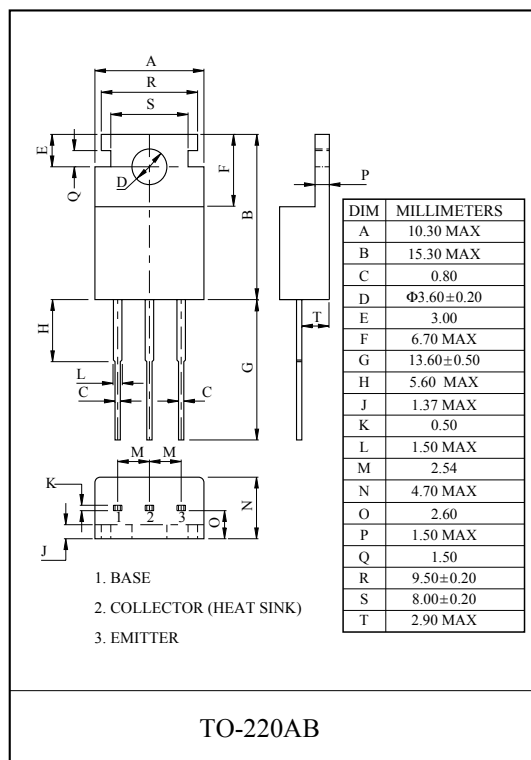


ELECTRICAL CHARACTERISTICS (Ta=25°C)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=100V, I_E=0$	-	-	100	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	1.0	mA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=50mA, I_B=0$	100	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10mA, I_C=0$	5.0	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE}=5V, I_C=1A$	70	-	240	
	$h_{FE(2)}$	$V_{CE}=5V, I_C=4A$	20	-	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=4A, I_B=0.4A$	-	-	2.0	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=5V, I_C=1A$	-	-	1.5	V
Transition Frequency	f_T	$V_{CE}=5V, I_C=1A$	-	30	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	40	-	pF

Note : $h_{FE(1)}$ Classification 0:70 ~ 140, Y:120 ~ 240


$I_C - V_{CE}$

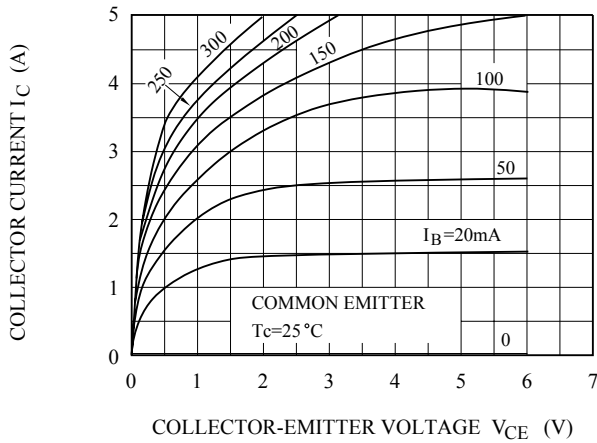


SAFE OPERATING AREA

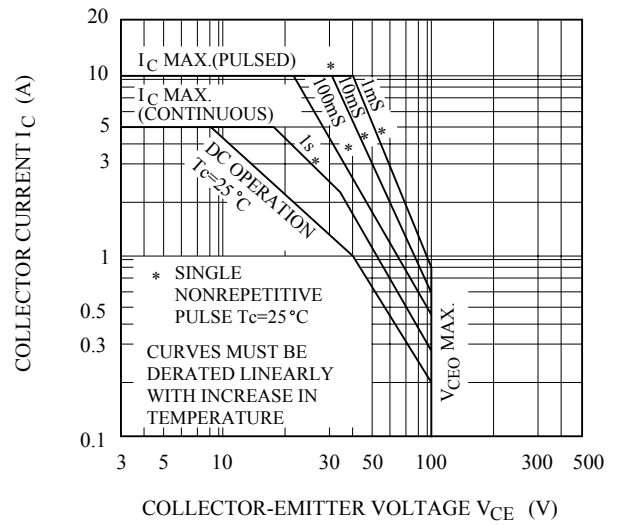

$h_{FE} - I_C$

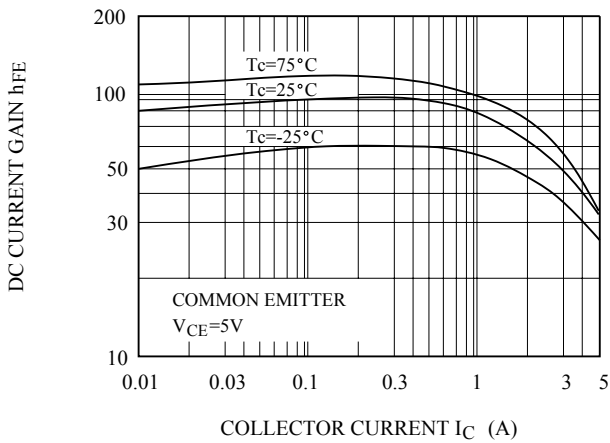

$P_c - T_a$

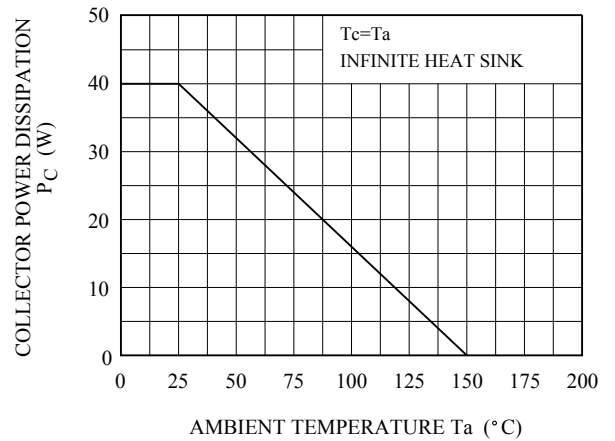

$V_{CE(sat)} - I_C$

