


Shape

KX-1601
KX-1606
KX-1612



Model Number	KX-1601	KX-1606	KX-1612
Rated Voltage (Vo-p)	1.5	6.0	12.0
Operating Voltage Range (Vo-p)	1.0 ~ 3.0	3.0 ~ 12.0	6.0 ~ 18.0
Current Consumption (mA)	Max. 20	Max. 50	Max. 40
Coil Resistance (Ω)	30.0 ± 4.5	50.0 ± 7.5	115.0 ± 17.2
Sound Pressure Level (dBA)	Min. 80dBA(Typical 88)@10cm	Min. 85dBA(Typical 92)@10cm	Min. 85dBA(Typical 92)@10cm
Rated Frequency (Hz)	2048		
Operating Temperature ($^{\circ}\text{C}$)	-20 ~ +60		
Storage Temperature ($^{\circ}\text{C}$)	-30 ~ +70		
Weight (Gram)	7.0		
Material	Noryl SE1-J		


Dimension

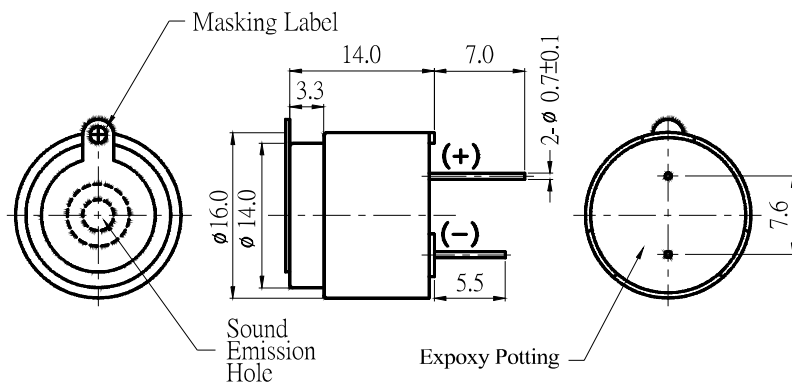


Tol : ± 0.5 Unit : mm

Characteristic

KX-1601

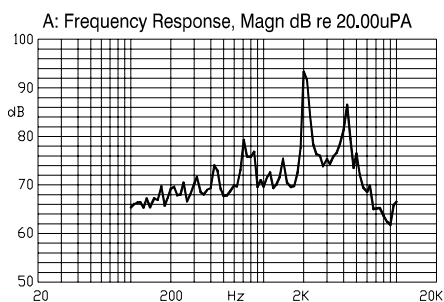

KX-1606

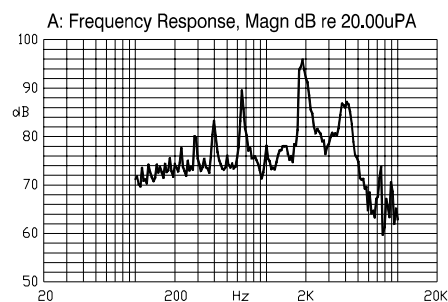

KX-1612

