

Small Signal MOSFET

310 mAmps, 60 Volts

N-Channel SOT-23

- Pb-Free Package is Available.
- S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	60	V _{dc}
Drain-Gate Voltage ($R_{GS} = 1.0 \text{ M}\Omega$)	V_{DGR}	60	V _{dc}
Drain Current	I_D	310	mA _{dc}
– Continuous $T_C = 25^\circ\text{C}$ (Note 1.)	I_{DM}	1200	
– Pulse $t < 10\mu\text{s}$			
Gate-Source Voltage	V_{GS}	± 20	V _{dc}
– Continuous	V_{GSM}	± 40	V _{pk}
– Non-repetitive ($t_p \leq 50 \mu\text{s}$)			

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (Note 2.) $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	225 1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C/W}$
Total Device Dissipation Alumina Substrate, (Note 3.) $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	300 2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Junction and Storage Temperature	T_J, T_{stg}	-55 to $+150$	$^\circ\text{C}$

1. The Power Dissipation of the package may result in a lower continuous drain current.
2. FR-5 = $1.0 \times 0.75 \times 0.062$ in.
3. Alumina = $0.4 \times 0.3 \times 0.025$ in 99.5% alumina.

ORDERING INFORMATION

Device	Marking	Shipping
L2SK801LT1G S-L2SK801LT1G	801	3000 Tape & Reel
L2SK801LT3G S-L2SK801LT3G	801	10000 Tape & Reel

L2SK801LT1G
S-L2SK801LT1G

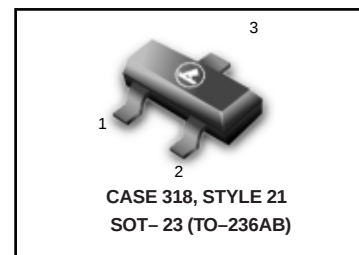


310 mAmps
60 VOLTS


$R_{DS(on)} = 1.5 \Omega$

$V_{GS(th)} = 1.8 \text{ V}$

N - Channel



MARKING DIAGRAM & PIN ASSIGNMENT



801 = Device Code
M = Month Code

L2SK801LT1G , S-L2SK801LT1G
ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Drain–Source Breakdown Voltage ($V_{GS} = 0$, $I_D = 10\ \mu\text{Adc}$)	$V_{(BR)DSS}$	60	–	–	Vdc
Zero Gate Voltage Drain Current ($V_{GS} = 0$, $V_{DS} = 60\ \text{Vdc}$)	I_{DSS}	$T_J = 25^\circ\text{C}$	–	1.0	μAdc
		$T_J = 125^\circ\text{C}$	–	500	
Gate–Body Leakage Current, Forward ($V_{GS} = 20\ \text{Vdc}$)	I_{GSSF}	–	–	100	nAdc
Gate–Body Leakage Current, Reverse ($V_{GS} = -20\ \text{Vdc}$)	I_{GSSR}	–	–	-100	nAdc

ON CHARACTERISTICS (Note 2.)

Gate Threshold Voltage ($V_{DS} = V_{GS}$, $I_D = 250\ \mu\text{Adc}$)	$V_{GS(th)}$	1.0	1.8	2.2	Vdc
On–State Drain Current ($V_{DS} \geq 2.0\ V_{DS(on)}$, $V_{GS} = 10\ \text{Vdc}$)	$I_{D(on)}$	500	–	–	mA
Static Drain–Source On–State Voltage ($V_{GS} = 10\ \text{Vdc}$, $I_D = 500\ \text{mAdc}$) ($V_{GS} = 5.0\ \text{Vdc}$, $I_D = 50\ \text{mAdc}$)	$V_{DS(on)}$	–	–	3.75	Vdc
		–	–	0.375	
Static Drain–Source On–State Resistance ($V_{GS} = 10\ \text{V}$, $I_D = 500\ \text{mAdc}$) ($V_{GS} = 5.0\ \text{Vdc}$, $I_D = 50\ \text{mAdc}$)	$r_{DS(on)}$	–	1.5	2.5	Ohms
		–	1.7	2.5	
Forward Transconductance ($V_{DS} \geq 2.0\ V_{DS(on)}$, $I_D = 200\ \text{mAdc}$)	g_{FS}	80	–	–	mmhos

DYNAMIC CHARACTERISTICS

Input Capacitance ($V_{DS} = 25\ \text{Vdc}$, $V_{GS} = 0$, $f = 1.0\ \text{MHz}$)	C_{iss}	–	17	50	pF
Output Capacitance ($V_{DS} = 25\ \text{Vdc}$, $V_{GS} = 0$, $f = 1.0\ \text{MHz}$)	C_{oss}	–	10	25	pF
Reverse Transfer Capacitance ($V_{DS} = 25\ \text{Vdc}$, $V_{GS} = 0$, $f = 1.0\ \text{MHz}$)	C_{rss}	–	2.5	5.0	pF

SWITCHING CHARACTERISTICS (Note 2.)

Turn–On Delay Time	$(V_{DD} = 25\ \text{Vdc}$, $I_D \cong 500\ \text{mAdc}$, $R_G = 25\ \Omega$, $R_L = 50\ \Omega$, $V_{gen} = 10\ \text{V}$)	$t_{d(on)}$	–	7	20	ns
Turn–Off Delay Time		$t_{d(off)}$	–	11	40	ns

BODY–DRAIN DIODE RATINGS

Diode Forward On–Voltage ($I_S = 115\ \text{mAdc}$, $V_{GS} = 0\ \text{V}$)	V_{SD}	–	–	-1.5	Vdc
Source Current Continuous (Body Diode)	I_S	–	–	-115	mAdc
Source Current Pulsed	I_{SM}	–	–	-800	mAdc

2. Pulse Test: Pulse Width $\leq 300\ \mu\text{s}$, Duty Cycle $\leq 2.0\%$.

L2SK801LT1G , S-L2SK801LT1G

TYPICAL ELECTRICAL CHARACTERISTICS

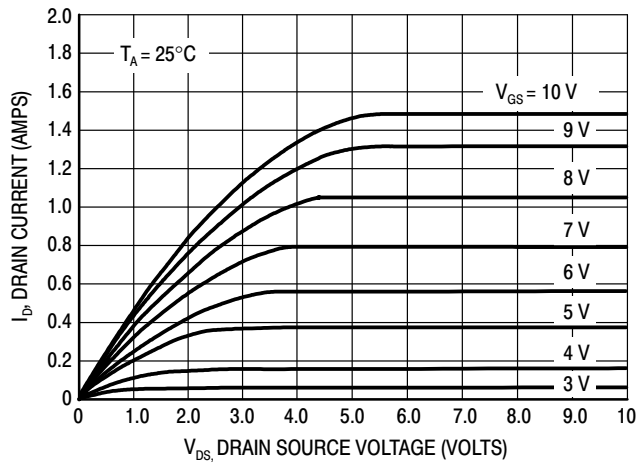


Figure 1. Ohmic Region

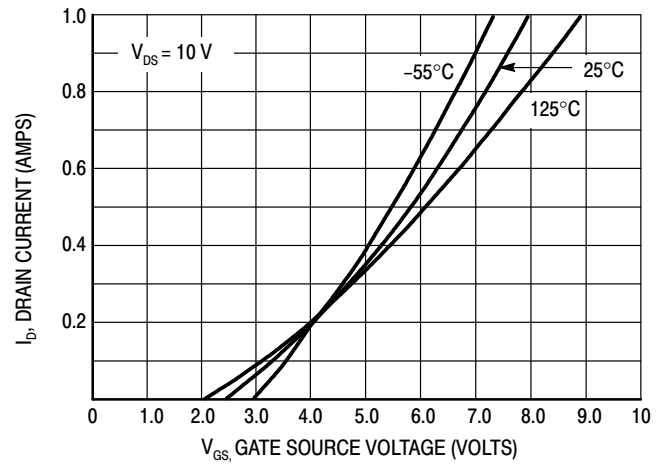


Figure 2. Transfer Characteristics

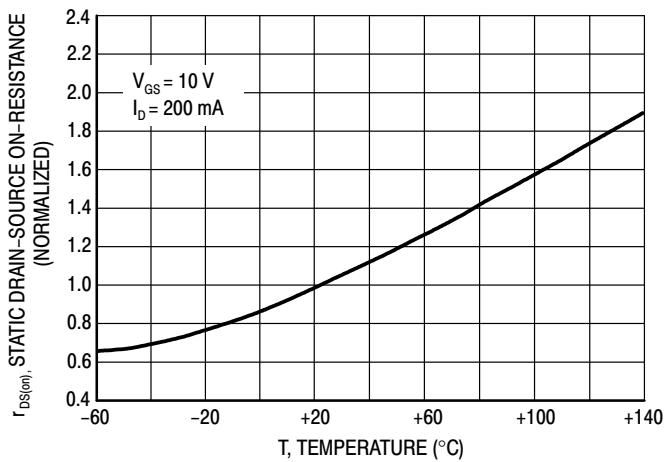


Figure 3. Temperature versus Static Drain-Source On-Resistance




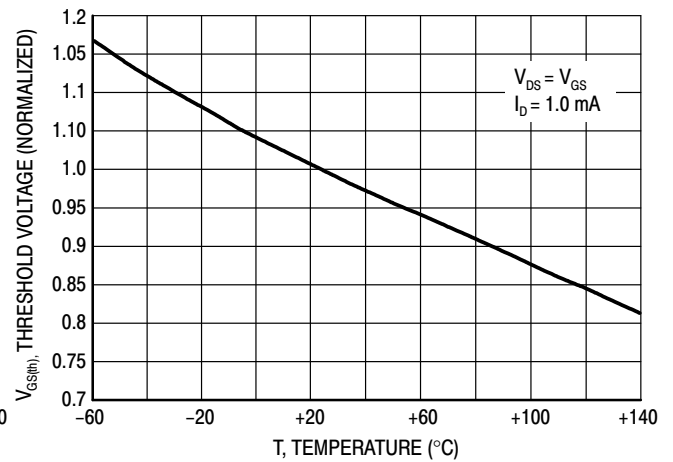


Figure 4. Temperature versus Gate Threshold Voltage

L2SK801LT1G , S-L2SK801LT1G
SOT-23
NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M,1982
2. CONTROLLING DIMENSION: INCH.



DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

