


SMART-DAA Transformer

- Approved by Conexant for their SMART-DAA solution
- RoHS Compliant
- Surface Mountable package
- Operating Temperature 0°C ~ 70°C


Electrical Specification @25°C

OCL:	Pri: 30uH Min. @10KHz/10mVrms
Hi-POT :	3000 VAC
Turn Ratio:	1:1.666±1%
D.C.R:	Pri: 0.225 ohm Max. Sec: 0.325 ohm Max.

Dimensions

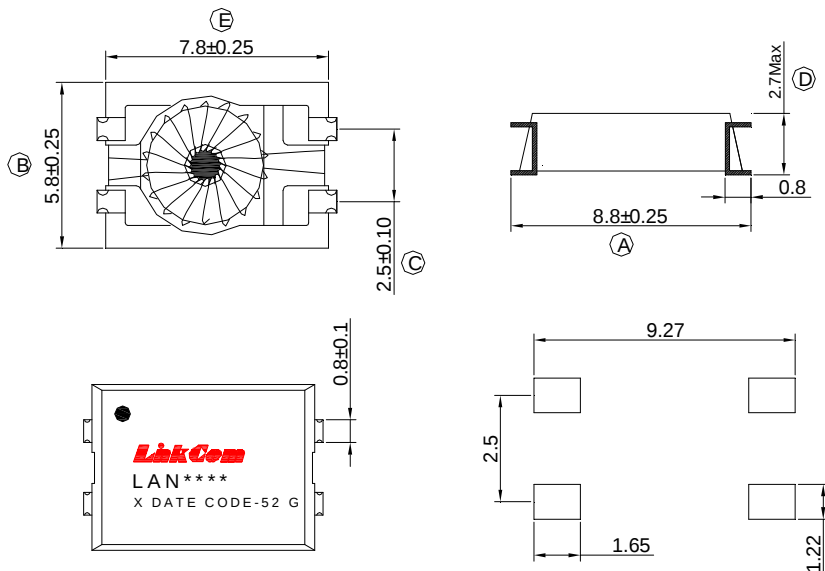

Schematic

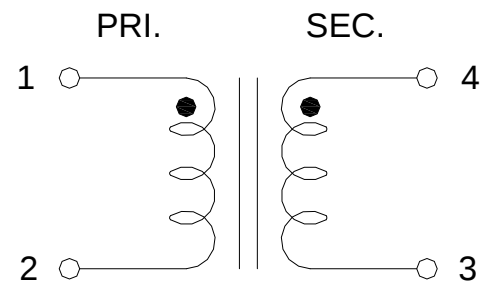

Mark

1. LAN****----LAN0066
2. X----PRODUCT LINE or BLANK
3. DATE CODE----YYWW
4. G----RoHS

Units: mm

Unless otherwise specified, all tolerances are ±0.25