

0.56" SINGLE DIGIT DISPLAY Electrical/Optical Characteristics at T_A=25°C & I_F=20mA


CHIP COLOR	0.56 inch SINGLE DIGIT		0.56 inch SINGLE DIGIT DIAMOND SEGMENT		λ_p (nm)	V_F (V)	I_V (mcd)	
	COMMON ANODE	COMMON CATHODE	COMMON ANODE	COMMON CATHODE	TYP.	TYP.	MIN.	TYP.
GREEN	LA5621-11	LC5621-11	LA5621-S2	LC5621- S2	572	2.1	3.9	6.5
YELLOW	LA5631-11	LC5631-11	LA5631- S2	LC5631- S2	589	2.1	3.1	5.2
ORANGE	LA5641-11	LC5641-11	LA5641- S2	LC5641- S2	630	2.1	4.5	7.4
ORANGE	LA5641R-11	LC5641R-11	LA5641R- S2	LC5641R- S2	630	2.1	4.5	7.4
RED	LA5671-11-M1	LC5671-11-M1	LA5671- S2-M1	LC5671- S2-M1	660	1.7	17.4	29.0
RED	LA5651-11	LC5651-11	LA5651- S2	LC5651- S2	700	2.1	1.1	1.8

LA56X1-11
COMMON ANODE
PIN

NO.	FUNCTION
1. CATHODE	E
2. CATHODE	D
3. COMMON	ANODE
4. CATHODE	C
5. CATHODE	DP
6. CATHODE	B
7. CATHODE	A
8. COMMON	ANODE
9. CATHODE	F
10. CATHODE	G

**LC56X1-11
COMMON CATHODE
PIN**

NO.	FUNCTION
1. ANODE	E
2. ANODE	D
3. COMMON	CATHODE
4. ANODE	C
5. ANODE	DP
6. ANODE	B
7. ANODE	A
8. COMMON	CATHODE
9. ANODE	F
10. ANODE	G

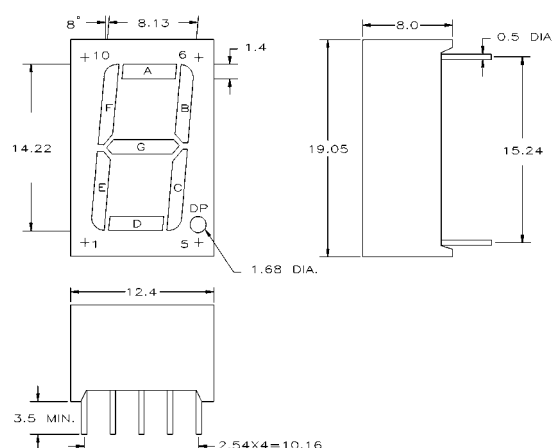


LA56X1-S2
COMMON ANODE
PIN

NO.	FUNCTION
1. CATHODE	E
2. CATHODE	D
3. COMMON	ANODE
4. CATHODE	C
5. CATHODE	DP
6. CATHODE	B
7. CATHODE	A
8. COMMON	ANODE
9. CATHODE	F
10. CATHODE	G

LC56X1-S2
COMMON CATHODE
PIN

NO.	FUNCTION
1. ANODE	E
2. ANODE	D
3. COMMON	CATHODE
4. ANODE	C
5. ANODE	DP
6. ANODE	B
7. ANODE	A
8. COMMON	CATHODE
9. ANODE	F
10. ANODE	G

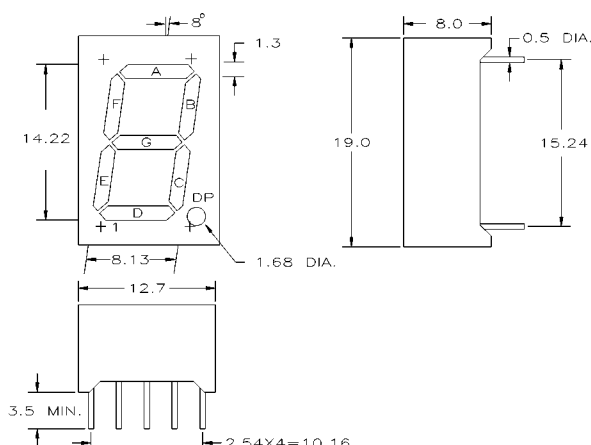

NOTES : 1.ALL DIMENSIONS ARE IN mm, TOLERANCE IS $\pm 0.25\text{mm}$ (0.01") UNLESS OTHERWISE NOTED.

2.THE SLOPE ANGLE OF ANY PIN MAY BE $\pm 5^\circ$ MAX.