

**Description**

- Standard 3.2 x 2.5 crystal oscillator
Ceramic package with a seam sealed metal lid, hermetically sealed
- Model CFPS-39
- Model Issue number 4

Frequency Parameters

- Frequency 16.0MHz
- Frequency Tolerance @ 25°C INCLUSIVE
- Frequency Stability $\pm 50.00\text{ppm}$
- Operating Temperature Range -40.00 to 85.00°C
- Ageing $\pm 3\text{ppm}$ max per year @ 25°C

Electrical Parameters

- Supply Voltage 3.3V
- Supply Voltage Tolerance $\pm 10\%$
- Current Draw 7mA max

Output Details

- Output Compatibility CMOS
- Output Load 15pF max
- Rise and Fall time (10% - 90%) 5ns max
- Duty Cycle 45/55%

Output Control

- Standby Operation:
Logic '1' ($>70\%$ VS) to pad 1 enables oscillator output
Logic '0' ($<30\%$ VS) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output
Standby Current: 10 μA max
Start-Up Time: 10ms max

Environmental Parameters

- Shock: MIL-STD-202F, Method 213B: 1000G, 0.5ms, 1/2 sine wave
- Vibration: MIL-STD-202F, Method 204D, Test Condition D: 20G (10Hz-2000Hz), 4hrs in 3 mutually perpendicular planes (total 12hrs)
- Storage Temperature Range: -55 to 125°C

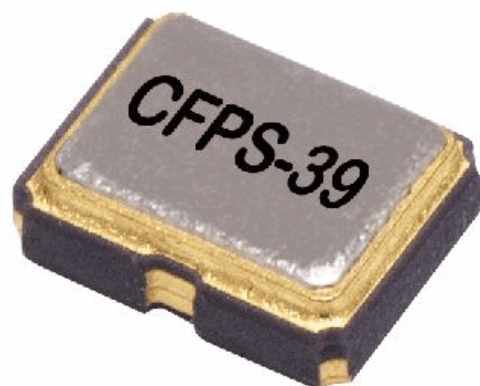


Compliance

- RoHS Status Compliant
- REACH Status Compliant

Packaging


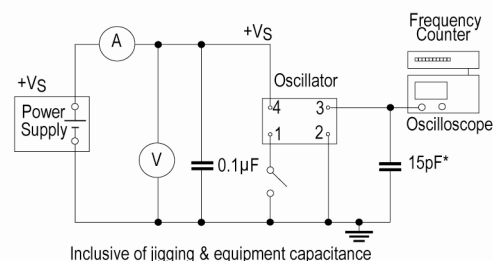
- Pack Type: Reel Tape and reel in accordance with EIA-481-D
- Pack Size 1,000
- Alternative packing option available

This document is correct at the time of printing; please contact your local office for the latest version.

**Outline (mm)**

Underside View

Pad Connections
1. Standby Operation
2. GND
3. Output
4. +VS

Solder Pad Layout**Test Circuit****Sales Office Contact Details:**

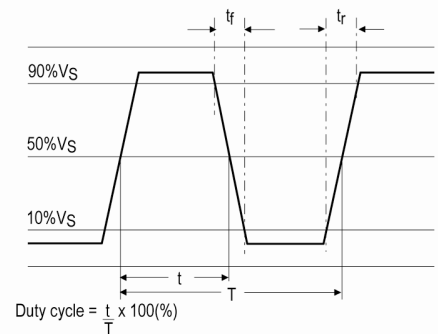
UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0) 408 455 2426

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Wave Form



Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18

USA: +1 (0) 408 455 2426

Email: info@iqdfrequencyproducts.com

Web: www.iqdfrequencyproducts.com