

FEATURES

- *Guaranteed* Max Input Offset Voltage 1.0mV
- *Guaranteed* Max Input Offset Current 5nA
- *Guaranteed* Max Response Time 250ns
- *Guaranteed* Min. Voltage Gain 200,000
- $\pm 30V$ Differential Input Voltage
- Drives 50mA Loads At Up To 50V.
- $\frac{1}{2}$ The Power Dissipation For LT111A/LT311A

APPLICATIONS

- General Purpose Comparator
- Zero Crossing Detector
- Voltage To Frequency Converter


DESCRIPTION

The LT111A is an improved version of the LM111 general purpose comparator. These new devices offer maximum input offset voltage of 1.0mV and input offset current of 5.0nA with a maximum response time of 250ns. The LT111A operates from a single 5V supply to $\pm 15V$ supplies and can drive up to 50mA loads referred to ground or either supply. A separate output ground pin allows output signals to be isolated from analog ground.

The versatility of the LT111A is enhanced by an input stage design which allows differential input signals of up to $\pm 30V$. Offset balancing, strobe capability and the ability to "OR" the output is also included. These features plus Linear Technology Corporation's advanced processing and reliability enhancements make the LT111A an ideal choice for most comparator applications. For higher performance requirements, see the LT1011. For operation up to 200°C, see LT111X data sheet.


6

Low Drift R/C Oscillator

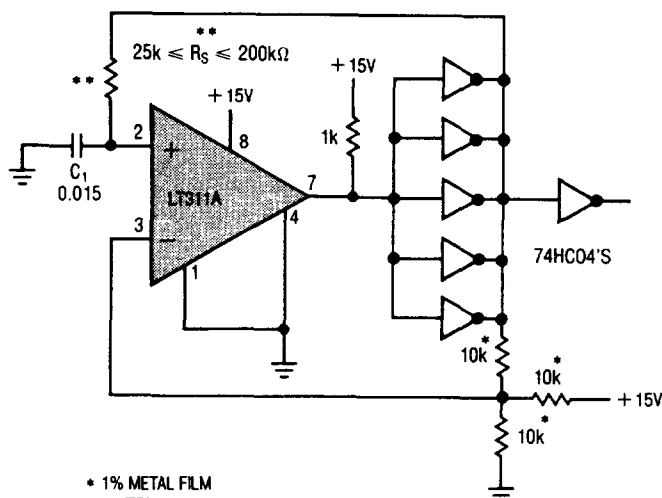

* 1% METAL FILM
 ** = TRW TYPE MTR-5/ +120ppm/°C.
 C₁ = .015 = POLYSTYRENE - 120ppm/°C $\pm 30ppm$ WESCO TYPE 32-P
 NOTE: COMPARATOR CONTRIBUTES $\leq 10ppm/°C$ DRIFT FOR FREQUENCIES BELOW 10kHz.



Transfer Function

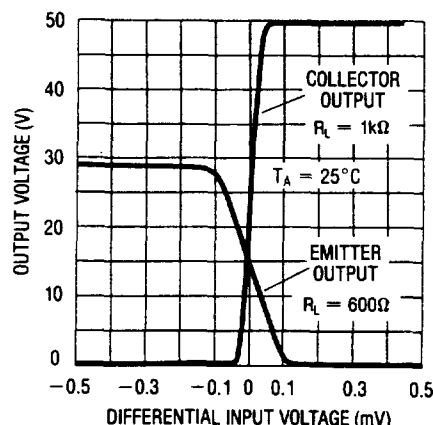

ABSOLUTE MAXIMUM RATINGS

Supply Voltage (pin 8 to pin 4)	36V
Output to Negative Supply (pin 7 to pin 4)	
LT111A/LM111	50V
LT311A/LM311	40V
Ground to Negative Supply (pin 1 to pin 4)	30V
Differential Input Voltage	$\pm 30V$
Voltage at Strobe Pin (pin 6 to pin 8)	5V
Input Voltage (Note 1)	$\pm 15V$
Output Short Circuit Duration	10 sec.
Operating Temperature Range (Note 2)	
LT111A/LM111	-55°C to 125°C
LT311A/LM311	0°C to 70°C
Storage Temperature Range	-65°C to 150°C
Lead Temperature (Soldering, 10 sec.)	300°C

PACKAGE/ORDER INFORMATION

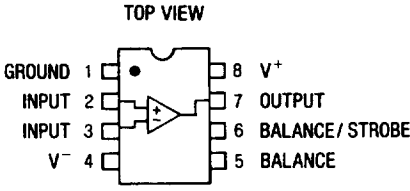 H PACKAGE TO-5 METAL CAN	ORDER PART NUMBER LT111AH LM111H LT311AH LM311H
TOP VIEW  NOTE: PIN 4 CONNECTED TO CASE. J8 PACKAGE 8 PIN CERDIP N8 PACKAGE 8 PIN PLASTIC	LT111AJ8 LM111J8 LT311AJ8 LM311J8 LT311AN8 LM311N8

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $T_A = 25^{\circ}\text{C}$ unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	LT 111A TYP	MAX	MIN	LM111 TYP	MAX	UNITS
V _{OS}	Input Offset Voltage	R _S ≤ 50k (Note 3, 4)	●		0.5	1.0 2.0		0.7	3.0 4.0	mV
I _{OS}	Input Offset Current	(Note 3,4)	●		2.0	5.0 10.0		4.0	10.0 20.0	nA
I _B	Input Bias Current	Note 3	●		60	100 150		60	100 150	nA
A _{VOL}	Large Signal Voltage Gain	Note 7		200	500		40	200		V/mV
	Response Time	Note 5			200	250		200		nS
	Saturation Voltage	V _{IN} ≤ −5mV, I _{OUT} = 50mA V ₊ ≥ 4.5V, V _− = 0 V _{IN} ≤ −6mV, I _{SINK} ≤ 8mA	●		0.75	1.5		0.75	1.5	V
			●		0.23	0.4		0.23	0.4	V
	Strobe ON Current	Note 6			3.0	4.0		3.0		mA
	Output Leakage Current	V _{IN} ≥ 5mV, V _{OUT} = 35V I _{STROBE} = 3mA	●		0.2 0.1	10.0 0.5		0.2 0.1	10.0 0.5	nA μA
	Input Voltage Range	V ₊ = 15V, V _− = 15V Pin 7 Pull up may go to 5V	●	−14.5	{ 13.8 } { −14.7 }	13.0	−14.5	{ 13.8 } { −14.7 }	13.0	V
	Positive Supply Current				3.0	4.0		5.1	6.0	mA
	Negative Supply Current				1.5	2.5		4.1	5.0	mA

Shading of a specification highlights those items which offer key improvements in parametric performance or guaranteed test limits provided for the first time.

ELECTRICAL CHARACTERISTICS $V_s = \pm 15V$, $T_A = 25^\circ C$ unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LT 311A			LM311			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	$R_S \leq 50k$ (Note 3, 4)	●		0.5	1.0 2.0		2.0	7.5 10	mV
I_{OS}	Input Offset Current	(Note 3, 4)	●		2.0	10 20		6.0	50 70	nA
I_B	Input Bias Current	Note 3			60	100 150		100	250 300	nA
A_{VOL}	Large Signal Voltage Gain			200	500		40	200		V/mV
	Response Time	Note 5			200	250		200		nS
	Saturation Voltage	$V_{IN} \leq -10mV$, $I_{OUT} = 50mA$ $V_+ \geq 4.5V$, $V_- = 0$ $V_{IN} \leq -10mV$, $I_{SINK} \leq 8mA$	●		0.75	1.5		0.75	1.5	V
					0.23	0.4		0.23	0.4	V
	Strobe ON Current	Note 6			3.0	4.0		3.0		mA
	Output Leakage Current	$V_{IN} \geq 10mV$, $V_{OUT} = 35V$ $I_{STROBE} = 3mA$	●		0.2 0.1	50 0.5		0.2	50	nA μA
	Input Voltage Range		●	-14.5	{ 13.8 -14.7 }	13.0	-14.5	{ 13.8 -14.7 }	13.0	V
	Positive Supply Current				3.0	4.0		5.1	7.5	mA
	Negative Supply Current				1.5	2.5		4.1	5.0	mA

The ● denotes the specifications which apply over the full operating temperature range.

Note 1: Applicable for $\pm 15V$ supplies. The positive input voltage limit is 30V above the negative supply. The negative input voltage limit is the negative supply.

Note 2: T_J max. = $150^\circ C$ for the LT111A and $95^\circ C$ for the LT311A.

Note 3: Offset voltage, offset current and bias current specifications apply for any supply voltage from a single 5V up to $\pm 15V$ supplies.

Note 4: Offset voltages and offset currents shown are the maximum values required to drive the output within a volt of either supply with a 1mA load. These parameters define an error band and take into account the worst case effects of voltage gain and input impedance.


Note 5: Response time is specified for a 100mV input step with 5mV overdrive with the collector output terminated with a 500 Ω pullup resistor tied to 5V.

Note 6: Do not short the strobe pin to ground. It should be current driven at 3 to 5mA for the shortest strobe time. Currents as low as 500 μA will strobe the LT111A if speed is not important. External leakage on the strobe pin in excess of 0.2 μA when the strobe is "off" can cause offset voltage shifts.


Note 7: $R_L = 1k\Omega$, $-10V \leq V_{OUT} \leq 14.5V$

TYPICAL PERFORMANCE CHARACTERISTICS


Input Bias Current

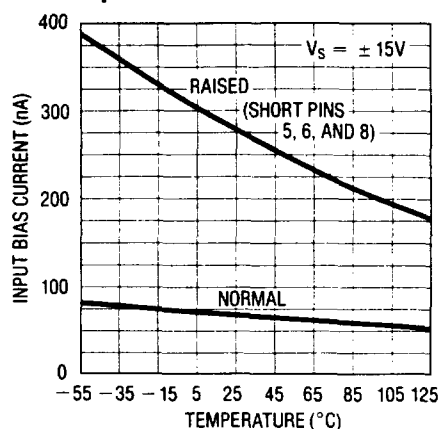


Input Offset Current

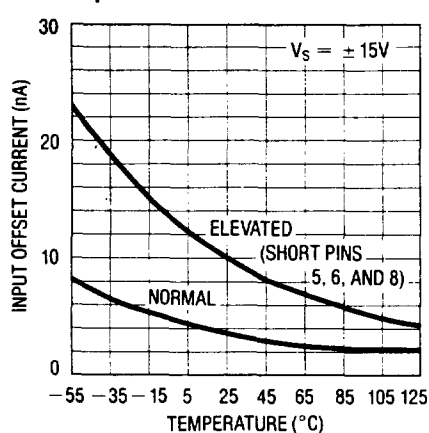


Offset Error

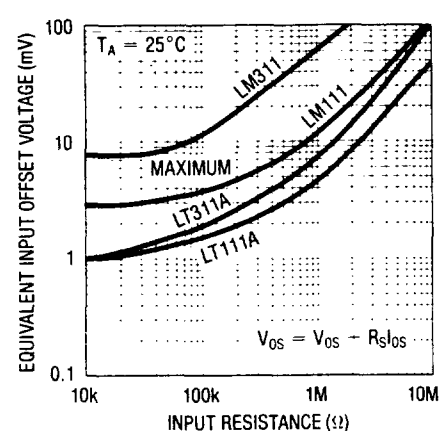


Input Characteristics

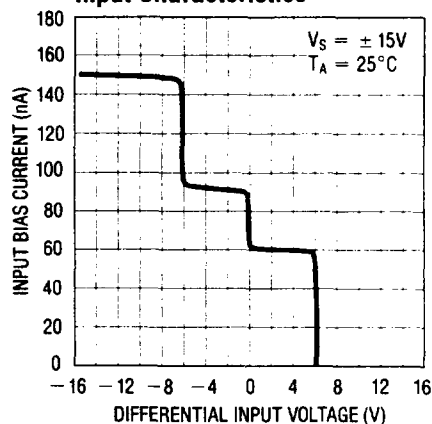


Common Mode Limits

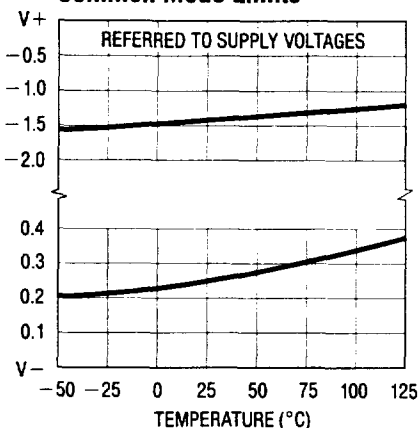


Transfer Function

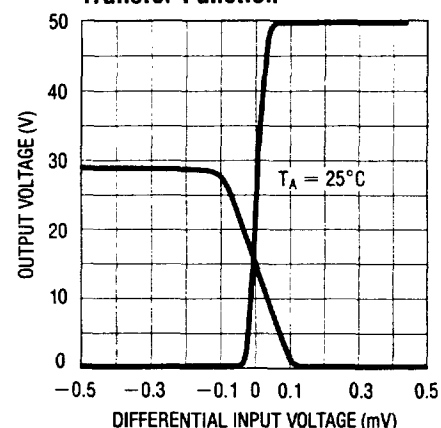


Response Time for Various Input Overdrives

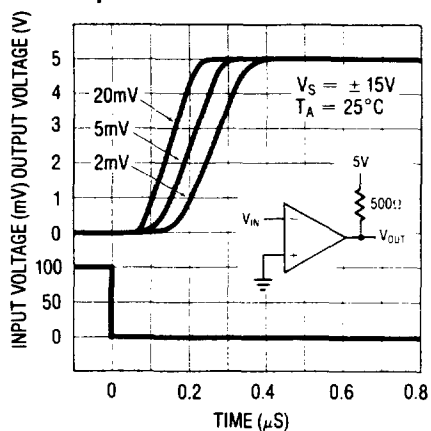

Response Time for Various Input Overdrives

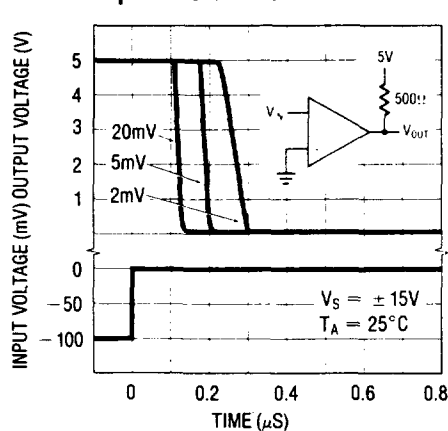


Collector Output Saturation Voltage

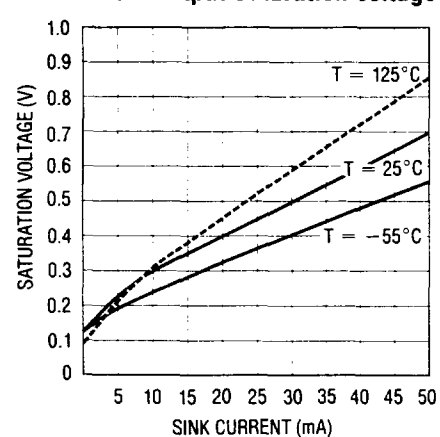


TYPICAL PERFORMANCE CHARACTERISTICS


Response Time Using GND
Pin as Output

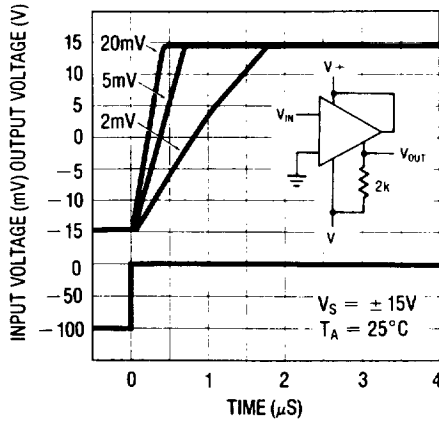


Response Time Using GND
Pin as Output

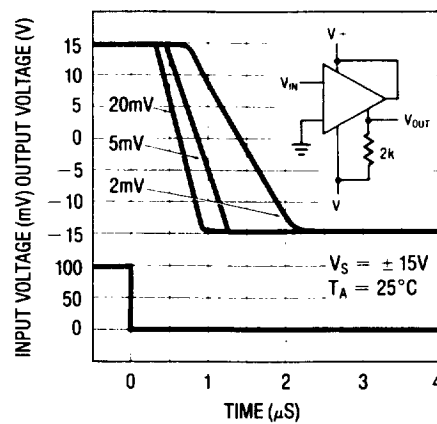


Output Limiting Characteristics

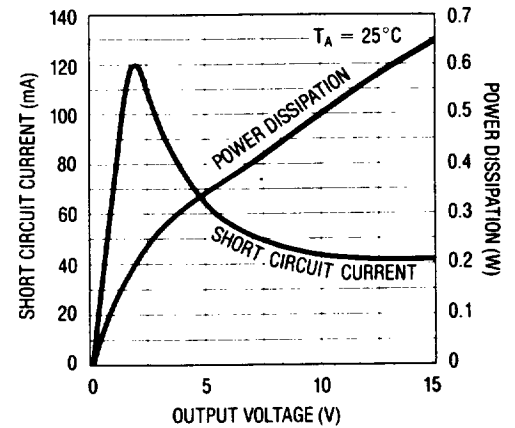


Supply Current
vs
Supply Voltage

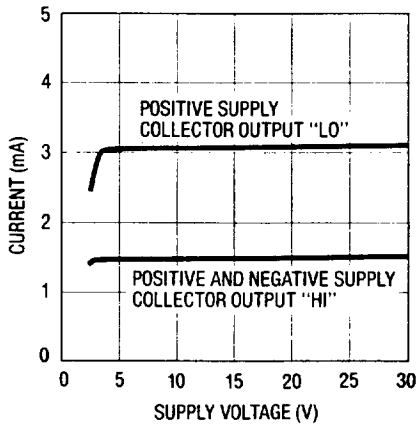

Supply Current
vs
Temperature

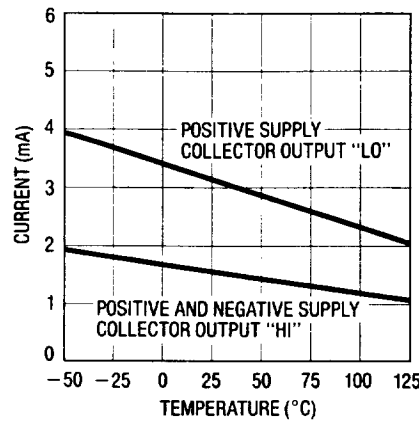


Leakage Current
vs
Temperature

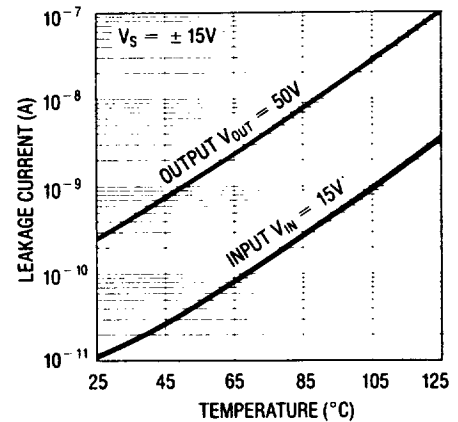


TYPICAL APPLICATIONS

Offset Balancing




Note: Pin Connections Shown
are for TO-5 package

Strobing

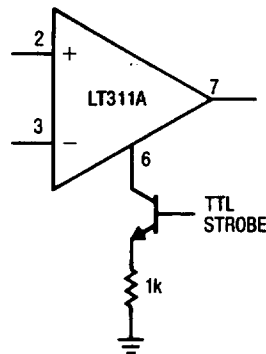

Note: Do Not Ground
Strobe Pin.


Increasing Input
Stage Current



Increases typical
common mode slew
rate from 7.0 V/μS
to 18V/μS.


TYPICAL APPLICATIONS

**Driving Load Referenced
To Positive Supply**




V^{++} CAN BE GREATER OR LESS THAN V^{+}

**Driving Load Referenced
To Negative Supply**




* NOTE THAT INPUT
POLARITY IS REVERSED
WHEN USING PIN 1 AS
OUTPUT

Driving Ground Referred Load

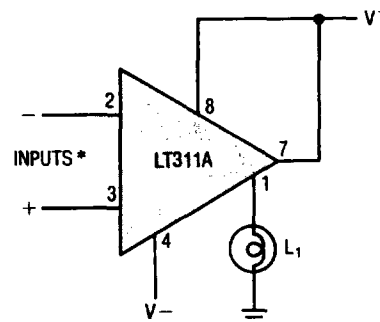


* NOTE THAT INPUT
POLARITY IS REVERSED
WHEN USING PIN 1 AS
OUTPUT

Window Detector

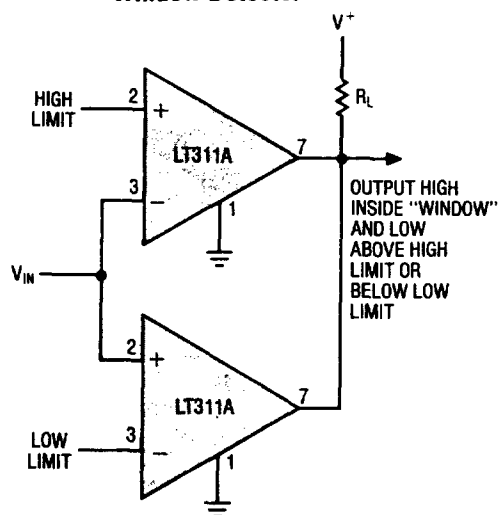


Using Clamp Diodes To Improve Frequency Response*

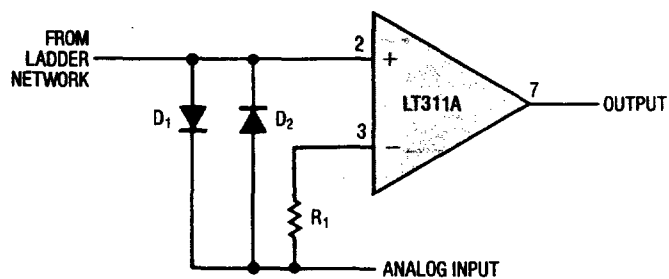


* RESPONSE TIME
INCREASES TO $\approx 500\text{ns}$
IF INPUT MUST SLEW 5V
TO REACH THRESHOLD.


Crystal Oscillator

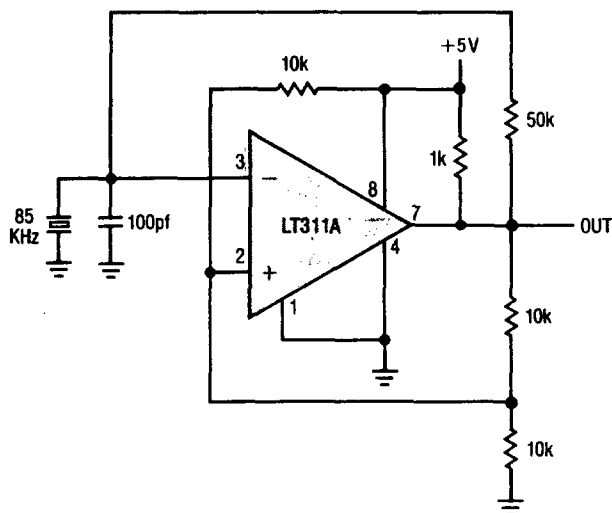

Detector For Magnetic Transducer

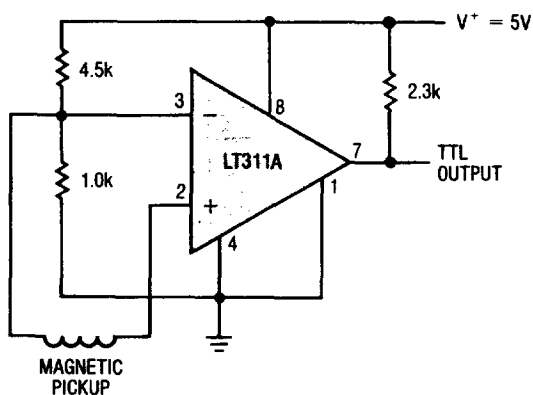

Low Drift R/C Oscillator

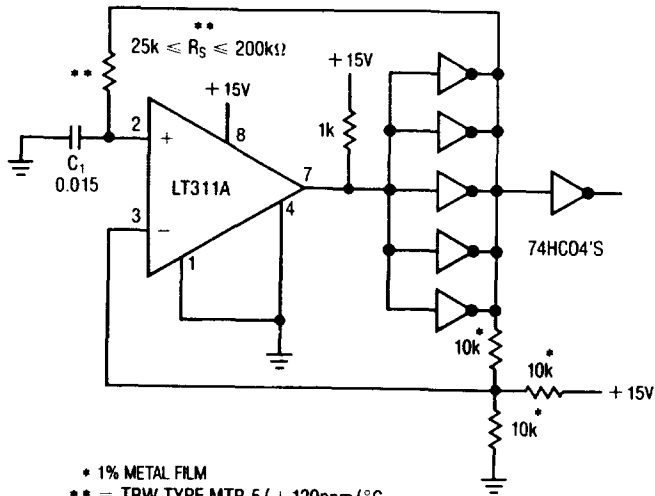


* 1% METAL FILM

** = TRW TYPE MTR-5/ + 120ppm/°C.

C₁ = .015 = POLYSTYRENE - 120ppm/°C ± 30ppm WESCO TYPE 32-P


NOTE: COMPARATOR CONTRIBUTES ≤ 10ppm/°C DRIFT FOR FREQUENCIES BELOW 10kHz.

Strobing Off Both Input* And Output Stages

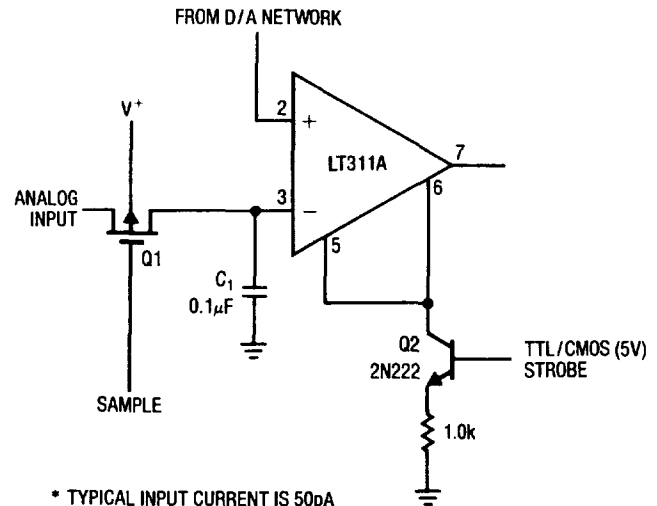


* TYPICAL INPUT CURRENT IS 50pA WITH INPUTS STROBED OFF. DO NOT GROUND STROBE PIN

Positive Peak Detector

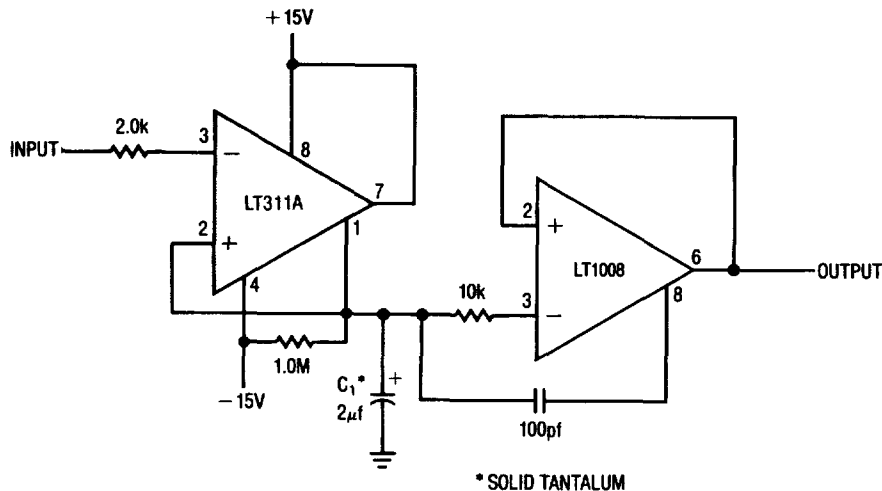


* SOLID TANTALUM

Negative Peak Detector

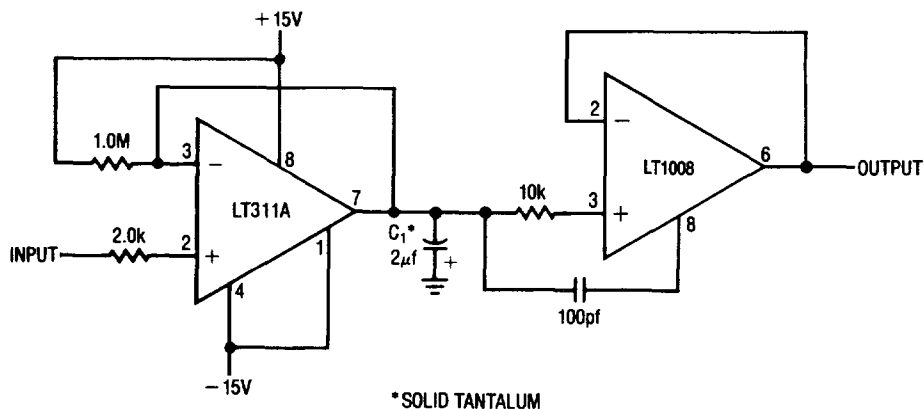


* SOLID TANTALUM

SCHEMATIC DIAGRAM

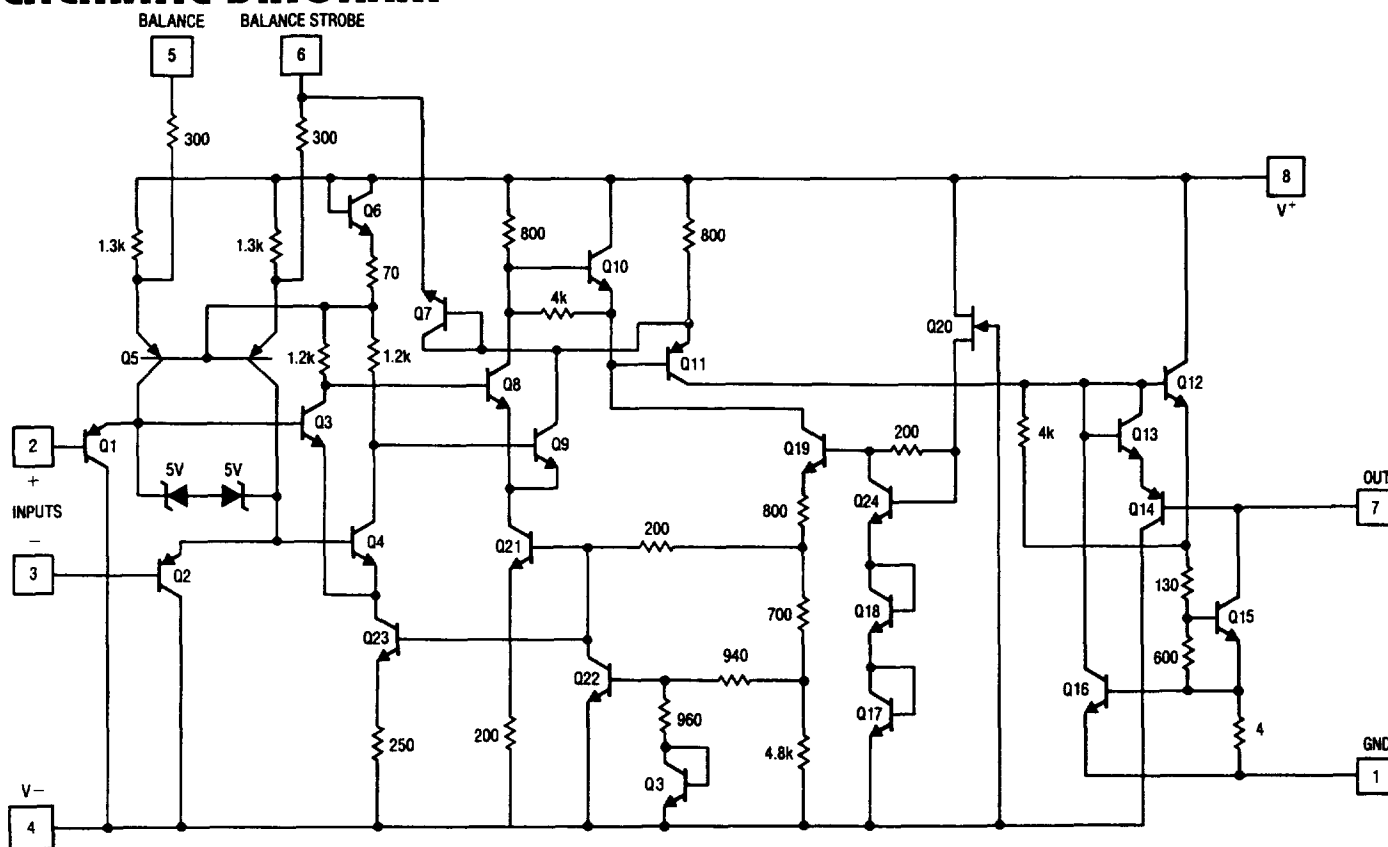

PACKAGE DESCRIPTION


H Package Metal Can

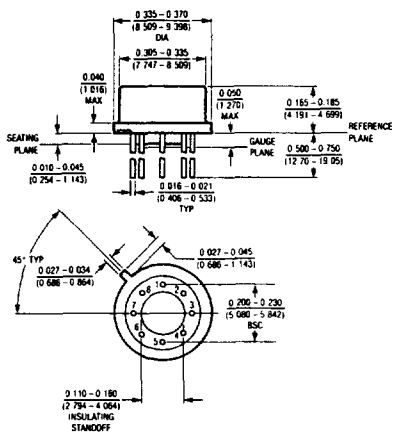

NOTE: LEAD DIAMETER IS UNCONTROLLED BETWEEN THE REFERENCE PLANE AND SEATING PLANE.


T_{jmax} 150°C	θ_{ja} 150°C/W	θ_{jc} 45°C/W
---------------------	--------------------------	-------------------------

J8 Package
8 Lead Hermetic Dip

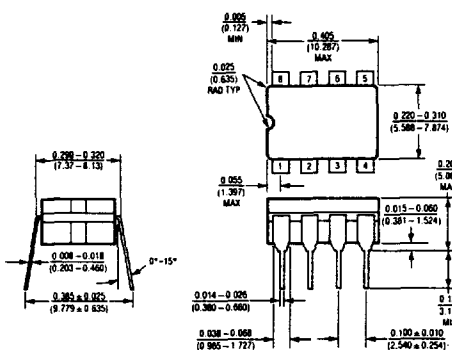

$T_{j\max}$ 150°C	Θ_{ja} 100°C/W
----------------------	--------------------------

N8 Package
8 Lead Plastic

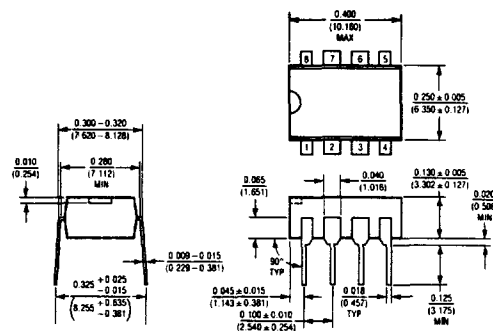

$T_{j\max}$	Θ_{ja}
100°C	130°C/W