




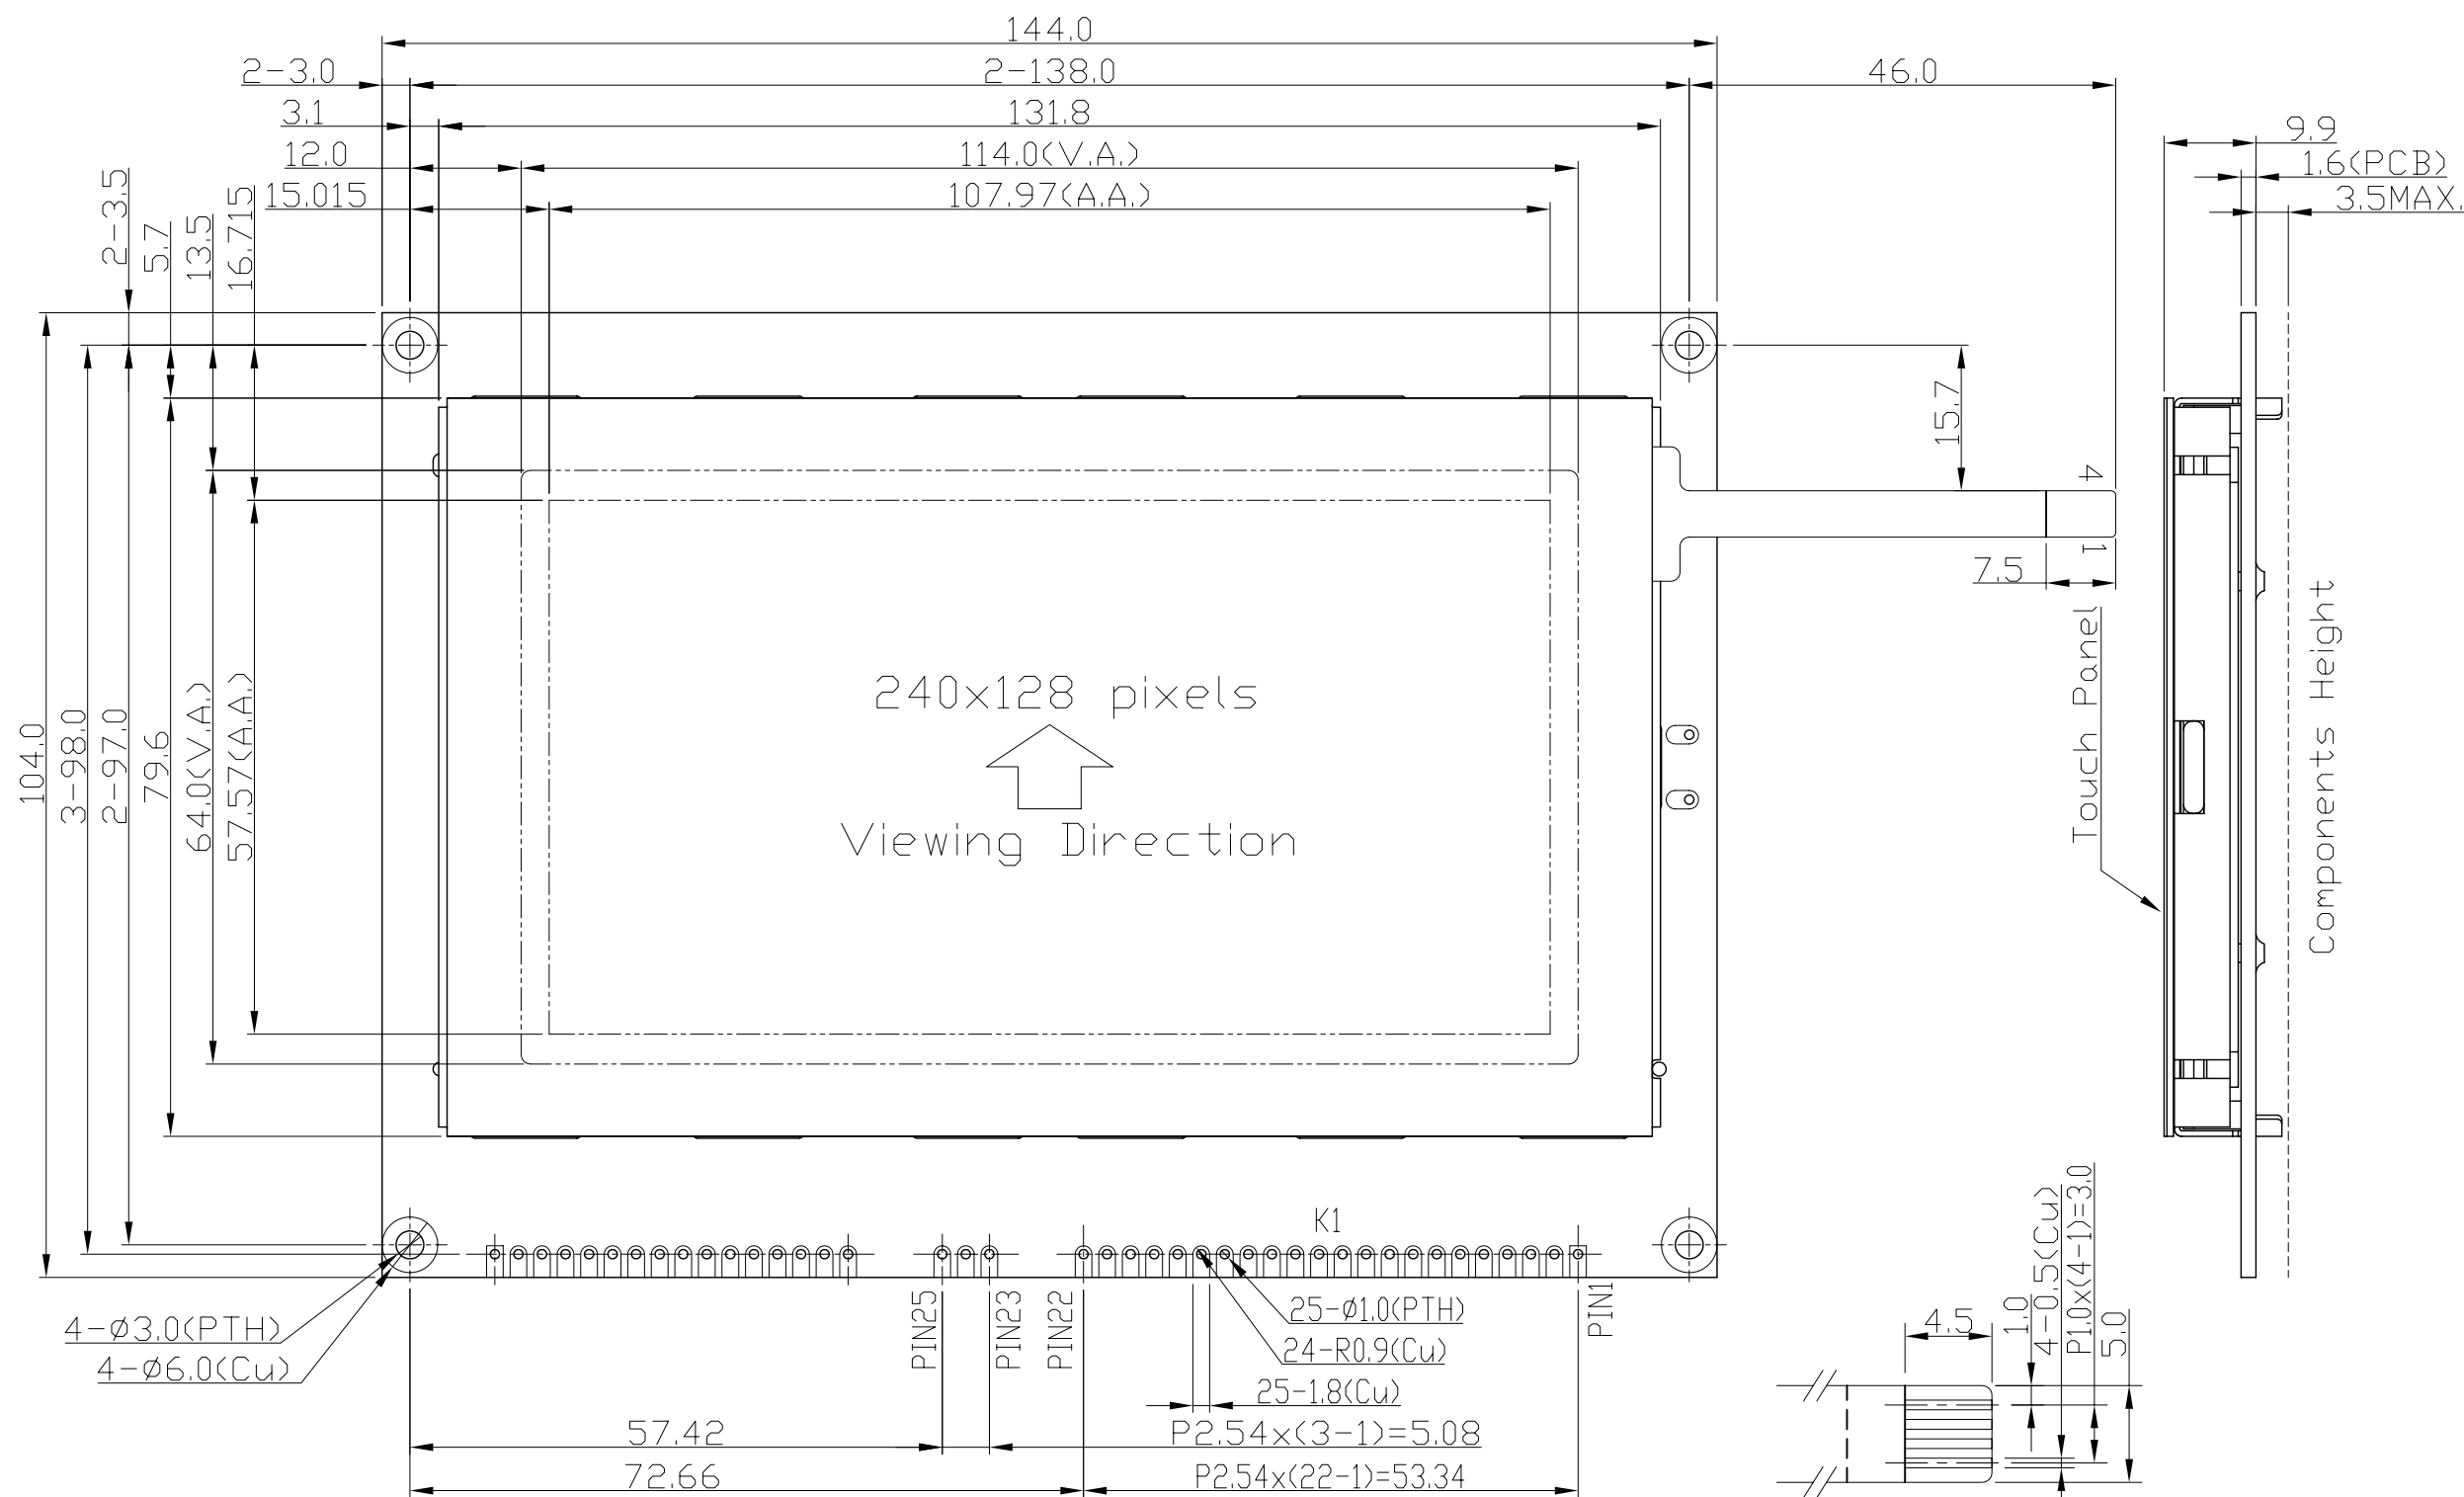


K1 Terminal No.	Pin Name
1	FG
2	VSS
3	VDD
4	V0
5	/WR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS1
20	VOUT
21	BLA
22	BLK
23	BLA
24	NC
25	BLK




Pixels Details
Scale=20/1

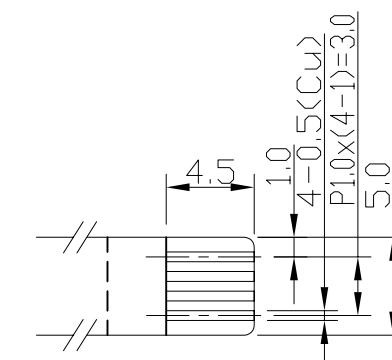

Touch Panel Terminal
(Conductor Side)
Scale=5/2

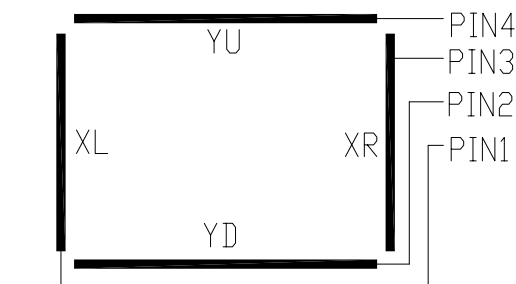

Touch Panel Circuit
Scale=Free

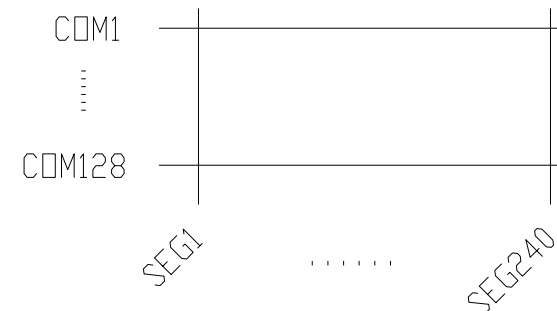

Wiring Details(Top View)
Scale=Free

- Note:
- *1. Display Type : STN, Negative, Transmissive
 - *2. Viewing Direction : 6H
 - *3. Duty : 1/128, Bias : 1/12
 - *4. Backlight Color : White
 - *5. Backlight Supply : 5.0V TYP.
 - *6. Operating Voltage : 5.0V
 - *7. Operating Temperature : -20°C~70°C
 - *8. Storage Temperature : -30°C~80°C
 - *9. Driver IC : T6963C
 - *10. An external VR(25K to 50K) must be connected for Contrast Control

C		
B		
A	Typing Correction	Liao yi fei 2011-01-04
Rev	Note	Date
Dwg	Title	LM240128TFW-C Outline Dwg
Dwg No.	MK-002063a-1-1	Date 2007-10-26
Scale	6/5	Tol. ±0.5
Unit	mm	Paper Size A3
Approved	Checked	Drawn Zhou Huifang
TOPWAY		