

## LM105/LM205/LM305/LM305A, LM376 Voltage Regulators

### General Description

The LM105 series are positive voltage regulators similar to the LM100, except that an extra gain stage has been added for improved regulation. A redesign of the biasing circuitry removes any minimum load current requirement and at the same time reduces standby current drain, permitting higher voltage operation. They are direct, plug-in replacements for the LM100 in both linear and switching regulator circuits with output voltages greater than 4.5V. Important characteristics of the circuits are:



- Output voltage adjustable from 4.5V to 40V
- Output currents in excess of 10A possible by adding external transistors
- Load regulation better than 0.1%, full load with current limiting

- DC line regulation guaranteed at 0.03%/V
- Ripple rejection on 0.01%V
- 45 mA output current without external pass transistor (LM305A)

Like the LM100, they also feature fast response to both load and line transients, freedom from oscillations with varying resistive and reactive loads and the ability to start reliably on any load within rating. The circuits are built on a single silicon chip and are supplied in a TO-99 metal can.

The LM105 is specified for operation for  $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ , and the LM305/LM305A is specified for  $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ .

### Schematic and Connection Diagrams

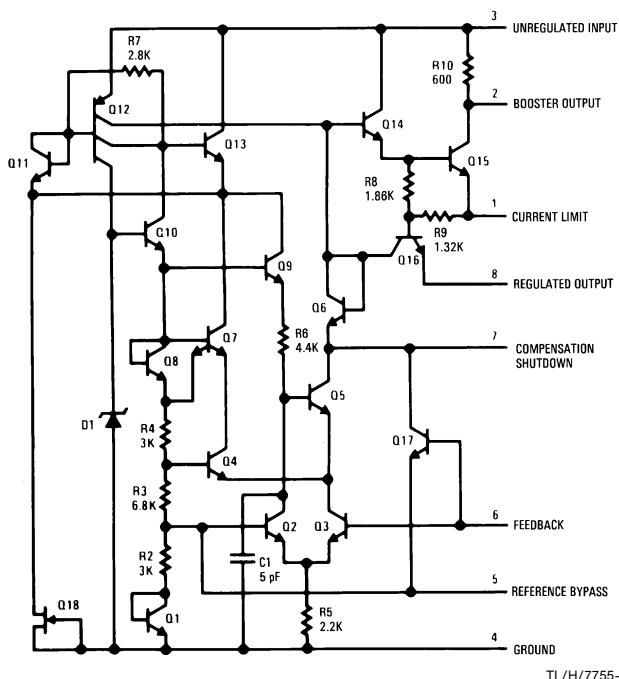

**Top View**  
**Order Number LM105H, LM105H/883,**  
**SMD # 5962-8958801, LM305H or LM305AH**  
**See NS Package Number H08C**

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/  
Distributors for availability and specifications.  
(Note 5)

|  | LM105           | LM305           | LM305A          |
|--|-----------------|-----------------|-----------------|
| Input Voltage                            | 50V             | 40V             | 50V             |
| Input-Output Differential                | 40V             | 40V             | 40V             |
| Power Dissipation (Note 1)               | 800 mW          | 800 mW          | 800 mW          |
| Operating Temperature Range              | -55°C to +125°C | -0°C to +70°C   | 0°C to +70°C    |
| Storage Temperature Range                | -65°C to +150°C | -65°C to +150°C | -65°C to +150°C |
| Lead Temperature (Soldering, 10 seconds) | 300°C           | 300°C           | 300°C           |

## Electrical Characteristics (Note 2)

| Parameter                         | Conditions  | LM105                           |       |      | LM305                           |       |      | LM305A                          |       |      | Units |
|-----------------------------------|---|---------------------------------|-------|------|---------------------------------|-------|------|---------------------------------|-------|------|-------|
|                                   |   | Min                             | Typ   | Max  | Min                             | Typ   | Max  | Min                             | Typ   | Max  |       |
| Input Voltage Range               |   | 8.5                             |       | 50   | 8.5                             |       | 40   | 8.5                             |       | 50   | V     |
| Output Voltage Range              |   | 4.5                             |       | 40   | 4.5                             |       | 30   | 4.5                             |       | 40   | V     |
| Input-Output Voltage Differential |   | 3.0                             |       | 30   | 3.0                             |       | 30   | 3.0                             |       | 30   | V     |
| Load Regulation<br>(Note 3)       | $R_{SC} = 10\Omega, T_A = 25^\circ\text{C}$               |                                 | 0.02  | 0.05 |                                 | 0.02  | 0.05 |                                 |       |      | %     |
|                                   | $R_{SC} = 10\Omega, T_A = T_{A(MAX)}$                     |                                 | 0.03  | 0.1  |                                 | 0.03  | 0.1  |                                 |       |      | %     |
|                                   | $R_{SC} = 10\Omega, T_A = T_{A(MIN)}$                     |                                 | 0.03  | 0.1  |                                 | 0.03  | 0.1  |                                 |       |      | %     |
|                                   |   | $0 \leq I_O \leq 12 \text{ mA}$ |       |      | $0 \leq I_O \leq 12 \text{ mA}$ |       |      |                                 |       |      |       |
|                                   | $R_{SC} = 0\Omega, T_A = 25^\circ\text{C}$                |                                 |       |      |                                 |       |      |                                 | 0.02  | 0.2  | %     |
|                                   | $R_{SC} = 0\Omega, T_A = 70^\circ\text{C}$                |                                 |       |      |                                 |       |      |                                 | 0.03  | 0.4  | %     |
|                                   | $R_{SC} = 0\Omega, T_A = 0^\circ\text{C}$                 |                                 |       |      |                                 |       |      |                                 | 0.03  | 0.4  | %     |
|                                   |   |                                 |       |      |                                 |       |      | $0 \leq I_O \leq 45 \text{ mA}$ |       |      |       |
| Line Regulation                   | $T_A = 25^\circ\text{C}$                                  |                                 |       |      |                                 |       |      |                                 |       |      | %/V   |
|                                   | $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$         |                                 |       |      |                                 |       |      |                                 |       |      | %/V   |
|                                   | $V_{IN} - V_{OUT} \leq 5\text{V}, T_A = 25^\circ\text{C}$ |                                 | 0.025 | 0.06 |                                 | 0.025 | 0.06 |                                 | 0.025 | 0.06 | %/V   |
|                                   | $V_{IN} - V_{OUT} \geq 5\text{V}, T_A = 25^\circ\text{C}$ |                                 | 0.015 | 0.03 |                                 | 0.015 | 0.03 |                                 | 0.015 | 0.03 | %/V   |
| Temperature Stability             | $T_{A(MIN)} \leq T_A \leq T_{A(MAX)}$                     |                                 | 0.3   | 1.0  |                                 | 0.3   | 1.0  |                                 | 0.3   | 1.0  | %     |

## Electrical Characteristics (Note 2) (Continued)

| Parameter                   | Conditions   | LM105 |       |      | LM305 |       |      | LM305A |       |      | Units |
|-----------------------------|--|-------|-------|------|-------|-------|------|--------|-------|------|-------|
|                             |  | Min   | Typ   | Max  | Min   | Typ   | Max  | Min    | Typ   | Max  |       |
| Feedback Sense Voltage      |  | 1.63  | 1.7   | 1.81 | 1.63  | 1.7   | 1.81 | 1.55   | 1.7   | 1.85 | V     |
| Output Noise Voltage        | 10 Hz $\leq$ f $\leq$ 10 kHz   |       |       |      |       |       |      |        |       |      |       |
|                             | C <sub>REF</sub> = 0   |       | 0.005 |      |       | 0.005 |      |        | 0.005 |      | %     |
|                             | C <sub>REF</sub> = 0.1 $\mu$ F   |       | 0.002 |      |       | 0.002 |      |        | 0.002 |      | %     |
| Standby Current Drain       | V <sub>IN</sub> = 30V, T <sub>A</sub> = 25°C   |       |       |      |       |       |      |        |       |      | mA    |
|                             | V <sub>IN</sub> = 40V  |       |       |      |       | 0.8   | 2.0  |        |       |      | mA    |
|                             | V <sub>IN</sub> = 50V  |       | 0.8   | 2.0  |       |       |      |        | 0.8   | 2.0  | mA    |
| Current Limit Sense Voltage | T <sub>A</sub> = 25°C, R <sub>SC</sub> = 10 $\Omega$ , V <sub>OUT</sub> = 0V, (Note 4) | 225   | 300   | 375  | 225   | 300   | 375  | 225    | 300   | 375  | mV    |
| Long Term Stability         |  |       | 0.1   |      |       | 0.1   |      |        | 0.1   |      | %     |
| Ripple Rejection            | C <sub>REF</sub> = 10 $\mu$ F, f = 120 Hz  |       | 0.003 |      |       | 0.003 |      |        | 0.003 |      | %/V   |
| $\theta_{JA}$               | TO-99 Board Mount in Still Air   |       | 230   |      |       | 230   |      |        | 230   |      | °C/W  |
| $\theta_{JA}$               | TO-99 Board Mount in 400 LF/Min Air Flow   |       | 92    |      |       | 92    |      |        | 92    |      | °C/W  |
| $\theta_{JC}$               | TO-99  |       | 25    |      |       | 25    |      |        | 25    |      | °C/W  |

**Note 1:** The maximum junction temperature of the LM105 and LM305A is 150°C, and the LM305 is 85°C. For operation at elevated temperatures, devices in the H08C package must be derated based on a thermal resistance of 168°C/W junction to ambient, or 25°C/W junction to case. Peak dissipations to 1W are allowable providing the dissipation rating is not exceeded with the power average over a five second interval for the LM105 and averaged over a two second interval for the LM305.













**Note 2:** Unless otherwise specified, these specifications apply for temperatures within the operating temperature range, for input and output voltages within the range given, and for a divider impedance seen by the feedback terminal of 2 k $\Omega$ . Load and line regulation specifications are for a constant junction temperature. Temperature drift effects must be taken into account separately when the unit is operating under conditions of high dissipation.

**Note 3:** The output currents given, as well as the load regulation, can be increased by the addition of external transistors. The improvement factor will be roughly equal to the composite current gain of the added transistors.

**Note 4:** With no external pass transistor.

**Note 5:** Refer to RETS105X Drawing for military specifications for the LM105.


# Typical Performance Characteristics LM105/LM305/LM305A



TL/H/7755-6


## Typical Applications

### 10A Regulator with Foldback Current Limiting

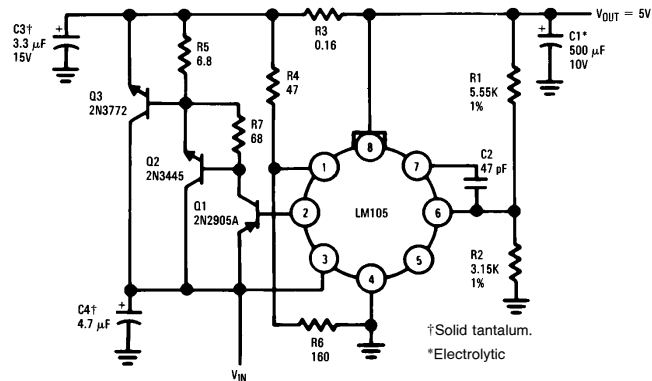


TL/H/7755-4

### 1.0A Regulator with Protective Diodes

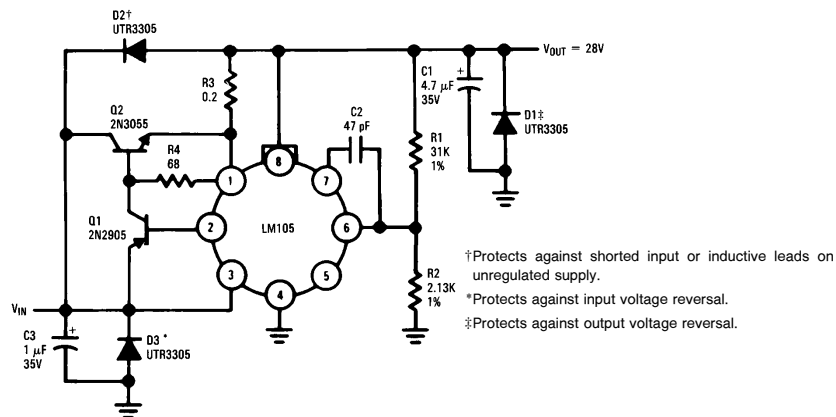


TL/H/7755-5

### Linear Regulator with Foldback Current Limiting

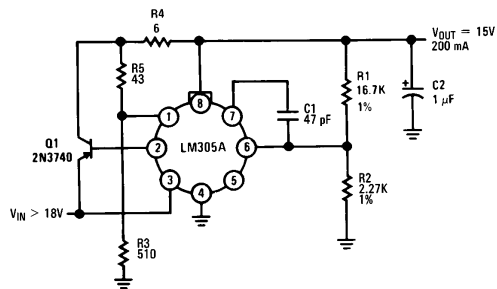

TL/H/7755-8


### Current Regulator

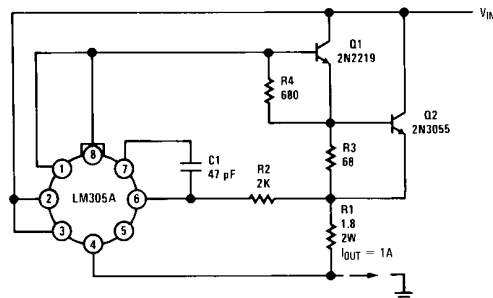

TL/H/7755-9


## Typical Applications (Continued)

### Shunt Regulator

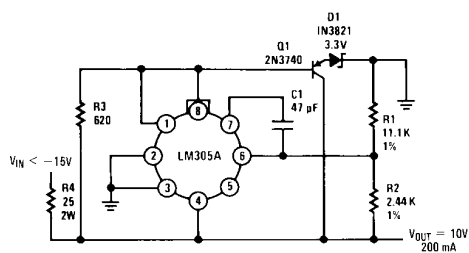


TL/H/7755-10

## Switching Regulator

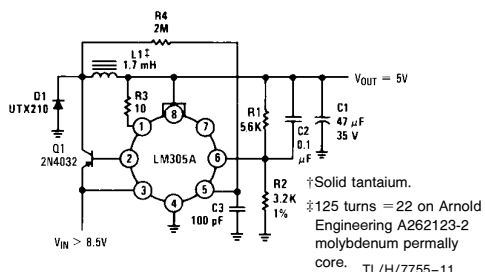


### Basic Positive Regulator with Current Limiting

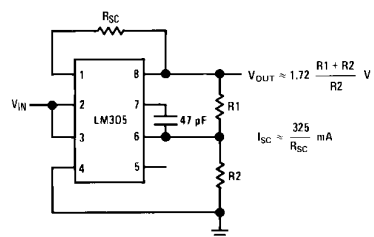


TL/H/7755-12

### 1.0A Regulator with Protective Diodes

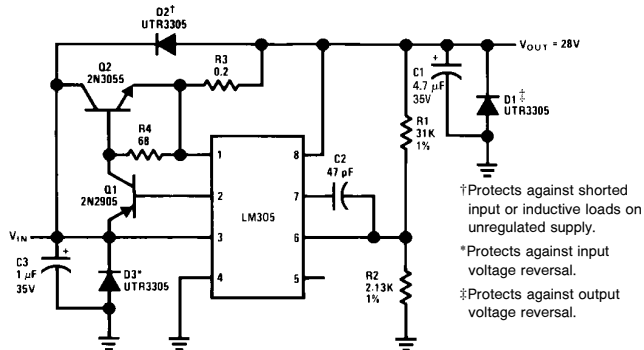



TL/H/7755-13

### Linear Regulator with Foldback Current Limiting

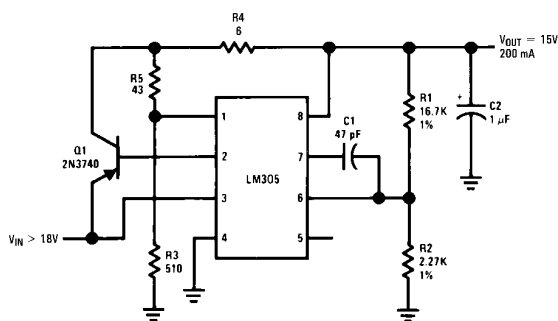

TL/H/7755-14



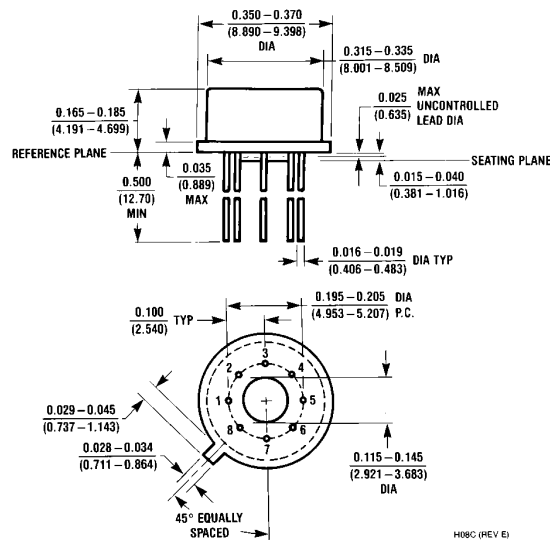**Physical Dimensions** inches (millimeters)**Metal Can Package (H)**

Order Number LM105H, LM105H/883, SMD # 5962-8958801, LM305H or LM305AH  
NS Package Number H08C

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

**National Semiconductor Europe**  
Fax: (+49) 0-180-530 85 86  
Email: cnjwge@tevm2.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Français Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
19th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
Tel: 81-043-299-2309  
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.