

LMN1072KJZF 20V N-Channel Enhancement Mode MOSFET
Features

- 20V/0.5A, $R_{DS(ON)}=300m\Omega@V_{GS}=4.5V$
- 20V/0.4A, $R_{DS(ON)}=450m\Omega@V_{GS}=2.5V$
- 20V/0.2A, $R_{DS(ON)}=700m\Omega@V_{GS}=1.8V$
- 20V/0.1A, $R_{DS(ON)}=1200m\Omega@V_{GS}=1.5V$
- Low Offset (Error) Voltage
- Low-Voltage Operation
- High-Speed Circuits
- Low Battery Voltage Operation
- ESD Protected
- SOT-23 package design

Product Description

LMN1072KJZF, N-Channel enhancement mode MOSFET, uses Advanced Trench Technology


to provide excellent $R_{DS(ON)}$, low gate charge.


These devices are particularly suited for low voltage power management, such as smart phone and notebook computer, and low in-line power loss are needed in commercial industrial surface mount applications.

Applications

- Power Management in Notebook
- Portable Equipment
- Battery Powered System
- DC/DC Converter
- Load Switch
- DSC
- LCD Display inverter

Pin Configuration

LMN1072KJZF (SOT-23)		
		
PIN	Description	
1	Gate	
2	Source	
3	Drain	



Ordering Information

Ordering Information					
Part Number	P/N	PKG code	Pb Free code	Package	Quantity
LMN1072KJZF	LMN1072K	JZ	F	SOT-23	3000 PCS

Marking Information

Marking Information		
Part Marking	Part Number	LFC code
2XW	2	XW

Absolute Maximum Ratings

(T_C=25°C Unless otherwise noted)

Symbol	Parameter	Typical	Unit
V _{DSS}	Drain-Source Voltage	20	V
V _{GSS}	Gate-Source Voltage	±10	V
I _D	Continuous Drain Current (T _J =150°C)	0.8	A
I _{DM}	Pulsed Drain Current	3.0	A
I _S	Continuous Source Current (Diode Conduction)	0.3	A
P _D	Power Dissipation	0.45	W
T _J	Operating Junction Temperature	-55 to +150	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C

Electrical Characteristics

(T_C=25°C Unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
Static						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	20			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , ID=250uA	0.3	0.6	1	
I _{GSS}	Gate Leakage Current	V _{DS} =0V, V _{GS} =±10V			10	uA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =16V, V _{GS} =0V			1	uA
		V _{DS} =16V, V _{GS} =0V T _J =85°C			30	
I _{D(ON)}	On-State Drain Current	V _{DS} ≥4.5V, V _{GS} =5V	0.7			A
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} =4.5V, ID=0.5A		200	300	mΩ
		V _{GS} =2.5V, ID=0.4A		270	450	
		V _{GS} =1.8V, ID=0.2A		390	700	
		V _{GS} =1.5V, ID=0.1A		570	1200	
g _{FS}	Forward Transconductance	V _{DS} =10V, ID=0.4A		1		S
V _{SD}	Diode Forward Voltage	I _S =0.15A, V _{GS} =0V		0.8	1.2	V
Dynamic						
Q _g	Total Gate Charge	V _{DS} =10V, V _{GS} =4.5V, I _D =0.25A		0.73		nC
Q _{gs}	Gate-Source Charge			0.93		
Q _{gd}	Gate-Drain Charge			0.12		
C _{iSS}	Input Capacitance	V _{DS} =16V, V _{GS} =0V, f=1MHz		60.7		pF
C _{oSS}	Output Capacitance			9.7		
C _{rSS}	Reverse Transfer Capacitance			5.4		
t _{d(on)}	Turn-On Time	V _{DD} =10V, R _L =47Ω, I _D =0.2A, V _{GS} =4.5V, R _G =10Ω		5.1		ns
t _r				7.4		
t _{d(off)}	Turn-Off Time			26.7		
t _f				12.3		

Typical Performance Characteristics

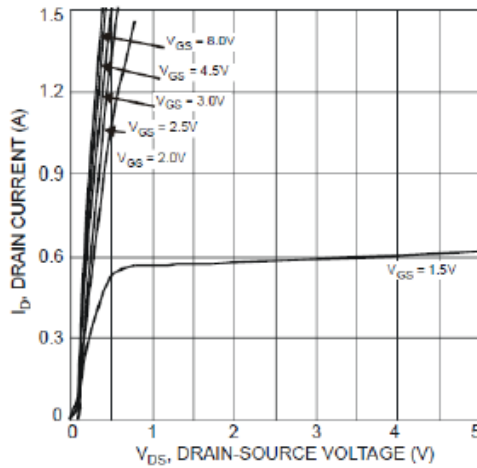


Fig. 1 Typical Output Characteristics

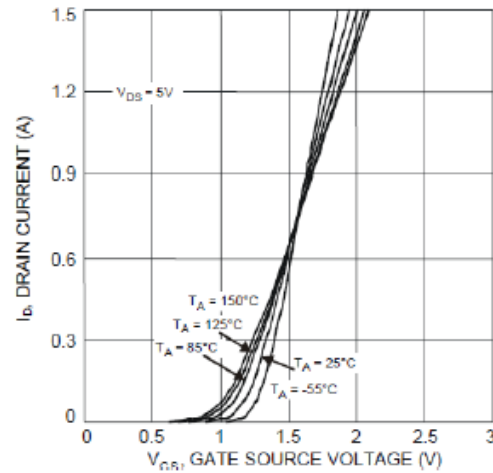


Fig. 2 Typical Transfer Characteristics

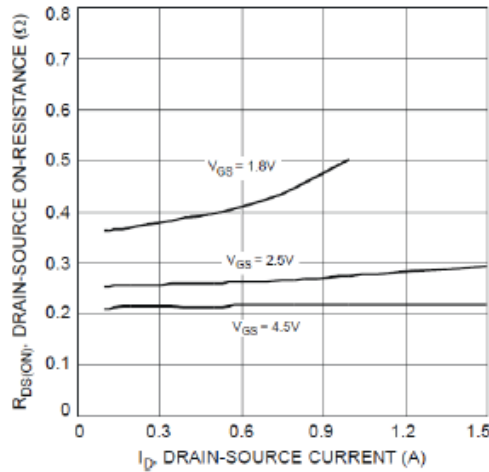


Fig. 3 Typical On-Resistance vs. I_D and V_{GS}

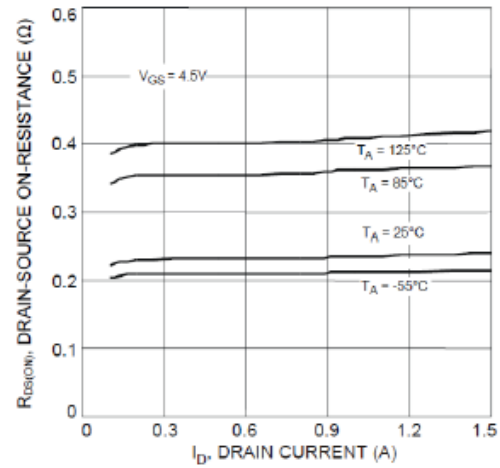


Fig. 4 Typical Drain-Source On-Resistance vs. I_D and T_J

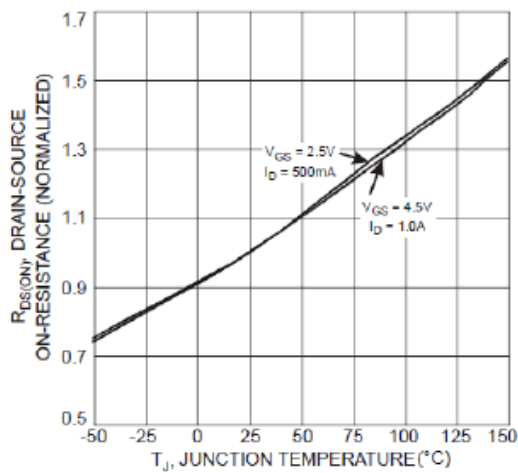


Fig. 5 On-Resistance Variation with T_J

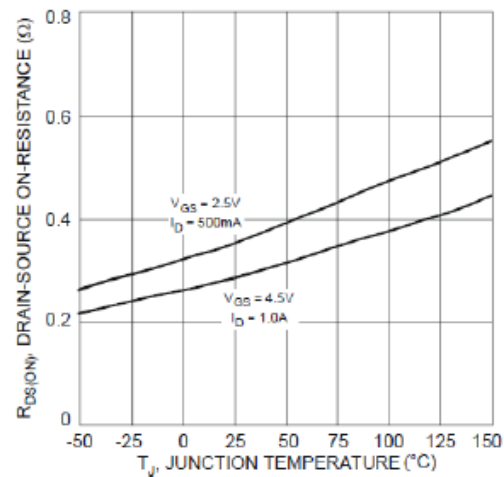
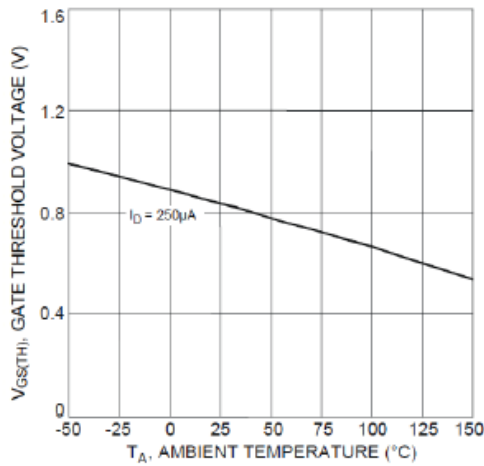
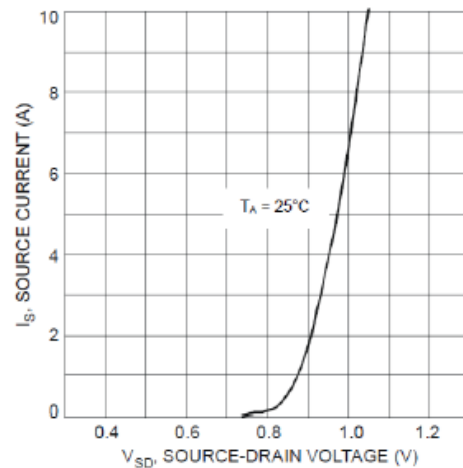
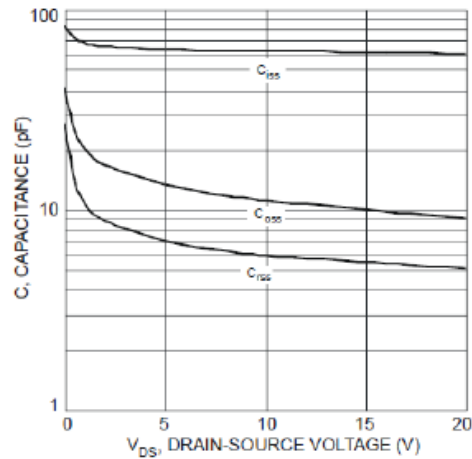
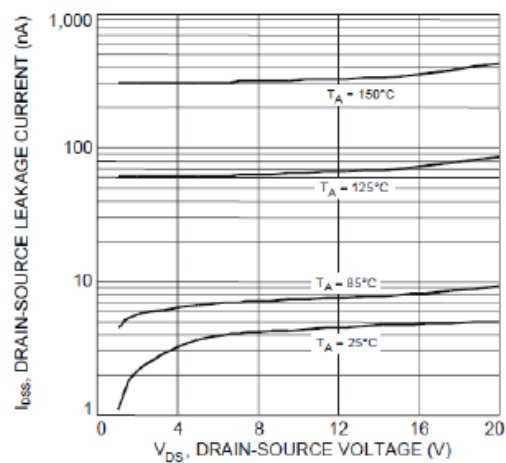
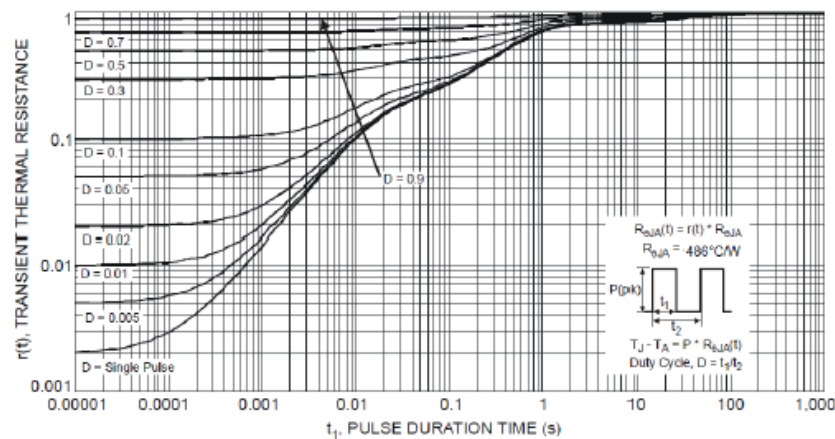
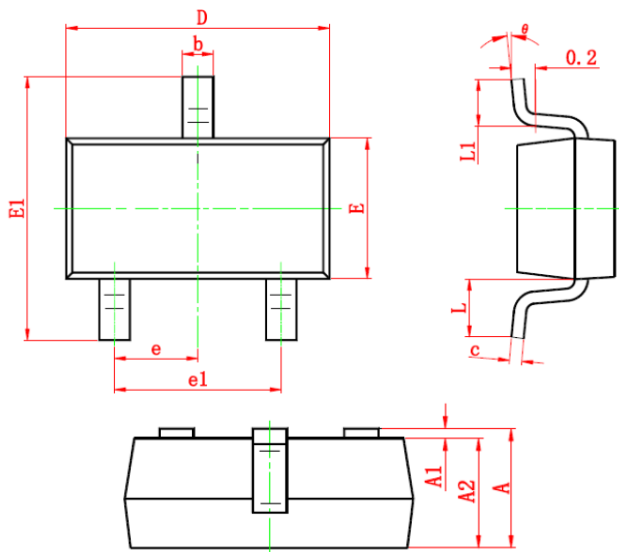


Fig. 6 On-Resistance Variation with T_J

Typical Performance Characteristics(continue)

Fig. 7 Gate Threshold Variation vs. T_A

Fig. 8 Diode Forward Voltage vs. Current

Fig. 9 Typical Capacitance

Fig. 10 Typical Drain-Source Leakage Current vs. Drain-Source Voltage

Fig. 11 Transient Thermal Response


Package Dimension:

SOT-23



Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	0.900	1.140	0.035	0.045
A1	0.000	0.140	0.000	0.006
A2	-	1.000	-	0.039
b	0.300	0.500	0.012	0.020
c	0.070	0.130	0.003	0.005
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23

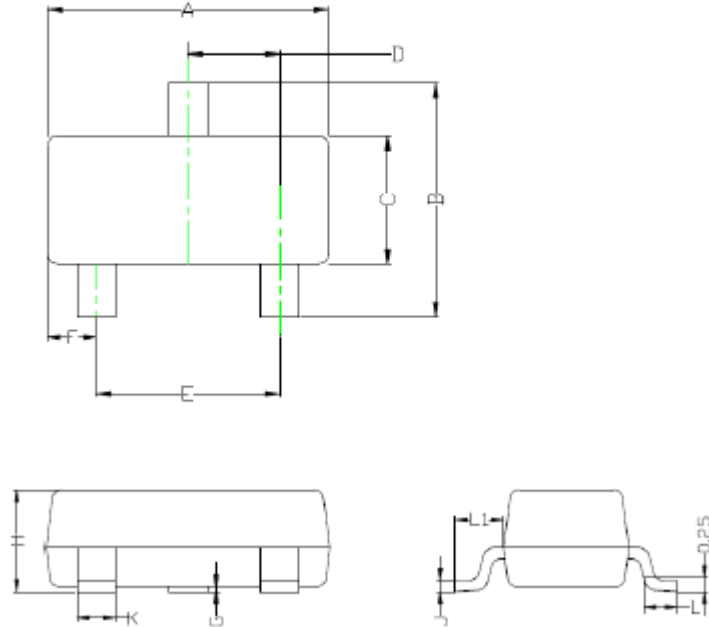

Dimensions				
Symbol	Millimeters		Inches	
	Min	Max	Min	Max
A	2.80	3.04	0.110	0.120
B	2.10	2.64	0.083	0.104
C	1.20	1.40	0.047	0.055
D	0.89	1.03	0.035	0.041
E	1.78	2.05	0.070	0.081
F	0.45	0.60	0.018	0.024
G	0.013	0.100	0.001	0.004
H	0.900	1.110	0.035	0.044
J	0.085	0.180	0.003	0.007
K	0.370	0.510	0.015	0.020
L	0.300	0.500	0.012	0.020
L1	0.500	0.600	0.020	0.024

NOTICE:

LFC Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all LFC Semiconductor products described or contained herein. LFC Semiconductor products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. LFC Semiconductor makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Information furnished is believed to be accurate and reliable. However LFC Semiconductor assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of LFC Semiconductor. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information without express written approval of LFC Semiconductor.