

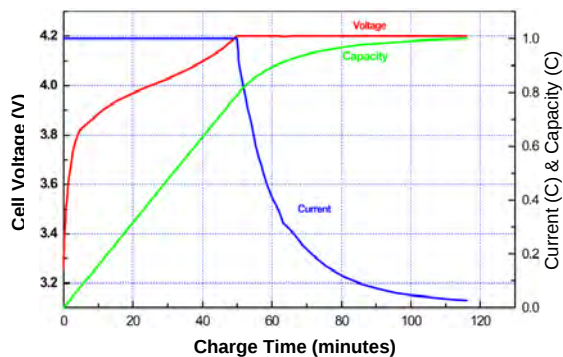
MODEL: LP103450
CHEMISTRY: LITHIUM-ION
SYSTEMS: LITHIUM-ION RECHARGEABLE
GENERAL SPECIFICATIONS

Rated Working Voltage: 3.7V @1CmA	Charging Voltage: 4.20V $\pm$ 0.05V
Nominal Capacity: 1750mAh @1CmA discharge	Maximum Charge Current: 1CmA
Minimum Capacity: 1700mAh @1CmA discharge	Standard Charge Method: Constant Current/Constant Voltage (CC/CV) Current 1CmA Voltage 4.2V End Current 20mA
Cycle Life: $\geq$ 80% Initial Capacity@400th cycles	
Internal Impedance: $\leq$ 70m Ω	Maximum Discharge Current: 2CmA
Weight of Bare Cell: 39g Approx.	Standard Discharge: Constant Current (CC) Current 1CmA End Voltage 3.0V
Dimension (max.): T10.8mm x W33.9mm x H49.8mm	
Operating Temperature: Charge 0°C / +45 °C Discharge -20°C / +60°C	Storage Temperature: 1 month -20°C / +45 °C 6 months -20°C / +35 °C

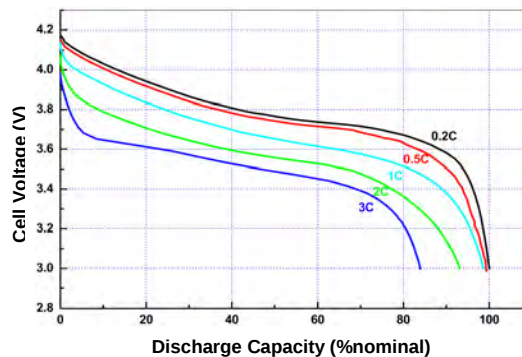
CAUTIONS

Avoid over-charging: charging voltage must not be over 4.25V.
Charging temperature shall be at 0°C ~ +45°C range.
No reverse charging.

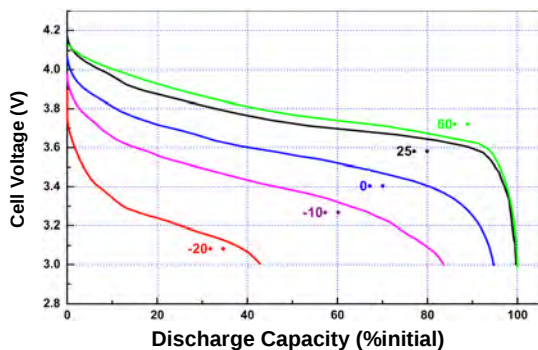
Discharge current must be below 2CmA/cell.
Discharge end voltage must be over 2.75V.
Discharge temperature range shall be at -20°C ~ 60°C.

PERFORMANCE
Charge Specialties


Charge: CC/CV, 1CmA, 4.2V, 20mA cut-off at RT.

Discharge Specialties


Charge: CC/CV, 1CmA, 4.2V, 20mA cut-off at RT.
Discharge: CC, 3.0V cut-off at RT.

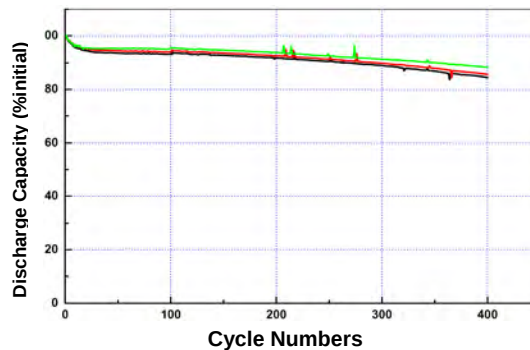
Temperature Specialties


Charge: CC/CV, 1CmA, 4.2V, 20mA cut-off at RT.
Discharge: CC, 1CmA, 3.0V cut-off.

CC - Constant Current

CV - Constant Voltage

RT - Room Temperature

Cycle Life


Charge: CC/CV, 1CmA, 4.2V, 20mA cut-off at RT.
Discharge: CC, 1CmA, 3.0V cut-off at RT.

Product specifications are subject to change without prior notice. Please contact BiPOWER for update information.