

SHARP

| | |
|------|-------------------|
| No. | LD-7752D |
| DATE | DECEMBER 22. 1995 |

TECHNICAL LITERATURE

FOR

TFT-LCD module

MODEL No. L Q 1 2 D X 1 2

The technical literature is subject to change without notice.
So, please contact Sharp or its representative before designing
your product based on this literature.

S. Uno

T. UNO

Department General Manager of
Engineering Dept. IV
TFT Development Center
Tenri Liquid Crystal Display Group
Sharp Corporation

REIN Components GmbH

Lötscher Weg 66 · D-41334 Nettetal
Telefon +49 (0)2153-733 91 · Telefax +49 (0)2153-733 575
email rein@rnc.memec.com · http://www.rein.memec.com
Hotline +49 (0)2153-733 112

A Specialist within the Memec International Components Group



1. Application

This technical literature applies to color TFT-LCD module, LQ12DX12.

2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver ICs, control circuit, power supply circuit and a backlight unit. Graphics and texts can be displayed on a 1024x768 pixel panel in 262,144 colors by supplying 18(6xRGB)x2bit parallel data signals, four kinds of timing signals and supplying +5V DC supply voltages for TFT-LCD panel driving.

The TFT-LCD panel used for this model is a low-reflection and higher-color-saturation type. Therefore, this module is suitable for the multi-media use.

Backlight-driving DC/AC inverter is not built in this module.

3. Mechanical Specifications

| Parameter | Specifications | Unit |
|---------------------------------------|----------------------------------|-------|
| Screen size | 31 (Diagonal) | cm |
| | 12.1(Diagonal) | inch |
| Effective display area | 245.8(H)×184.3(V) | mm |
| Display pixels | 1024(H)×768(V) | pixel |
| | (1 pixel=R+G+B dots) | — |
| Pixel pitch | 0.24(H)×0.24(V) | mm |
| Pixel configuration | R,G,B vertical stripe | — |
| Display mode | Normally white | — |
| Outline dimension (TYP) ^{*1} | 283(W)×215.6(H)×16.5(D) | mm |
| Weight | 1070 | g |
| Surface treatment | Anti-glare and hard-coating (2H) | |


^{*1} NOTE: excluding backlight cables.

4. Input Terminals and function

4-1-a) TFT-LCD panel driving

CN1 (Interface signal and +5V power supply)

Using connector: IL-FPR-50S-HF(JAE)

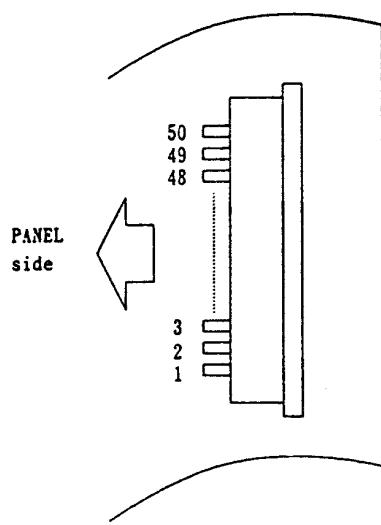

| Pin No. | Symbol | Function |
|---------|--------|---------------------------------------|
| 1 | GND | - |
| 2 | R10 | Red data signal of even pixels bit0 |
| 3 | R11 | Red data signal of even pixels bit1 |
| 4 | R12 | Red data signal of even pixels bit2 |
| 5 | R13 | Red data signal of even pixels bit3 |
| 6 | R14 | Red data signal of even pixels bit4 |
| 7 | R15 | Red data signal of even pixels bit5 |
| 8 | G10 | Green data signal of even pixels bit0 |
| 9 | G11 | Green data signal of even pixels bit1 |
| 10 | G12 | Green data signal of even pixels bit2 |
| 11 | G13 | Green data signal of even pixels bit3 |
| 12 | G14 | Green data signal of even pixels bit4 |
| 13 | G15 | Green data signal of even pixels bit5 |
| 14 | B10 | Blue data signal of even pixels bit0 |
| 15 | B11 | Blue data signal of even pixels bit1 |
| 16 | B12 | Blue data signal of even pixels bit2 |
| 17 | B13 | Blue data signal of even pixels bit3 |
| 18 | B14 | Blue data signal of even pixels bit4 |
| 19 | B15 | Blue data signal of even pixels bit5 |
| 20 | GND | - |

- continues on the next page -

| Pin No. | Symbol | Function |
|---------|--------|--------------------------------------|
| 21 | R00 | Red data signal of odd pixels bit0 |
| 22 | R01 | Red data signal of odd pixels bit1 |
| 23 | R02 | Red data signal of odd pixels bit2 |
| 24 | R03 | Red data signal of odd pixels bit3 |
| 25 | R04 | Red data signal of odd pixels bit4 |
| 26 | R05 | Red data signal of odd pixels bit5 |
| 27 | G00 | Green data signal of odd pixels bit0 |
| 28 | G01 | Green data signal of odd pixels bit1 |
| 29 | G02 | Green data signal of odd pixels bit2 |
| 30 | G03 | Green data signal of odd pixels bit3 |
| 31 | G04 | Green data signal of odd pixels bit4 |
| 32 | G05 | Green data signal of odd pixels bit5 |
| 33 | B00 | Blue data signal of odd pixels bit0 |
| 34 | B01 | Blue data signal of odd pixels bit1 |
| 35 | B02 | Blue data signal of odd pixels bit2 |
| 36 | B03 | Blue data signal of odd pixels bit3 |
| 37 | B04 | Blue data signal of odd pixels bit4 |
| 38 | B05 | Blue data signal of odd pixels bit5 |
| 39 | GND | — |
| 40 | ENABLE | — |
| 41 | Vsync | Vertical sync signal(negative) |
| 42 | Hsync | Horizontal sync signal(negative) |
| 43 | GND | — |
| 44 | CKEV | Clock signal of even pixels |
| 45 | CKOD | Clock signal of odd pixels |
| 46 | GND | — |
| 47 | VCC | +5V power supply |
| 48 | VCC | +5V power supply |
| 49 | VCC | +5V power supply |
| 50 | VCC | +5V power supply |

4-2) Backlight(twin CCFTs)

CNA Using connector:BHR-03VS-1(JST)

Corresponding connector:SM02(8.0)B-BHS(JST)

| Pin No. | Symbol | Function |
|---------|-------------------|---|
| 1 | V _{HIGH} | Power supply for lamp (High voltage side) |
| 2 | NC | This is electrically opened. |
| 3 | V _{LOW} | Power supply for lamp (Low voltage side) |

* Cable length: 65±5mm

5. Absolute Maximum Ratings

| Parameter | Symbol | Condition | Ratings | Unit | Remark |
|--|------------------|----------------------|-----------------------------|------|--------|
| Input voltage | V _I | T _a =25°C | -0.3 ~ V _{cc} +0.3 | V | - |
| +5V supply voltage | V _{cc} | T _a =25°C | -0.3 ~ +6 | V | - |
| Storage temperature | T _{stg} | - | -25 ~ +60 | °C | 【Note】 |
| Operating temperature (Ambient temp.) | T _{opa} | - | 0 ~ +50 | °C | - |

【Note】 Relative humidity 95%RH Max. (at T_a≤40°C)Maximum wet-bulb temperature 39°C or less. (at T_a>40°C)

No condensation.

6. Electrical Characteristics

6-1. Electrical Characteristics

6-1-a) TFT-LCD panel driving

T_a = 25°C

| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Remark |
|---------------------------------|---------------------|------------------|------|------|-----------------|------|-----------------|
| +5V | Supply voltage | V _{cc} | +4.5 | +5.0 | +5.5 | V | 【Note1】 |
| | Current dissipation | I _{cc} | - | 300 | 450 | mA | 【Note2】 |
| Permissive input ripple voltage | | V _{P-P} | - | - | 100 | mV | V _{cc} |
| Input threshold voltage | High | V _{TH} | +2.4 | - | V _{cc} | V | - |
| | Low | V _{TL} | GND | - | +1.0 | V | - |


【Note1】

Vcc-turn-on conditions

$$t_1 \leq 10 \text{ ms}$$

$$0 < t_2 \leq 10 \text{ ms}$$


$$0 < t_3 \leq 1 \text{ s}$$

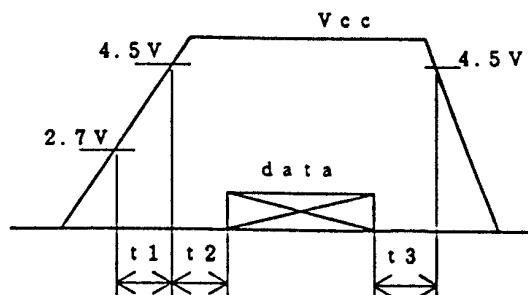

Vcc-dip conditions

$$1) 2.7 \text{ V} \leq V_{cc} < 4.5 \text{ V}$$

$$t_d \leq 10 \text{ ms}$$

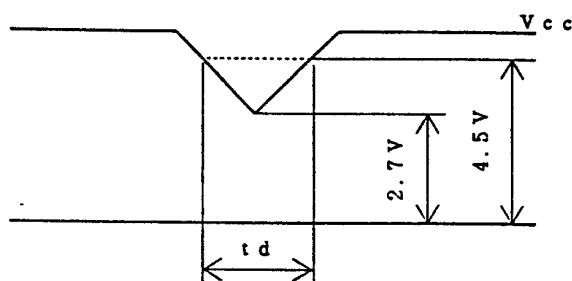


$$2) V_{cc} < 2.7 \text{ V}$$

Vcc-dip conditions should also follow the Vcc-turn-on conditions.

※CAUTION : No Horizontal sync and Vertical sync signals must damage LCD panel permanently.

【Note2】

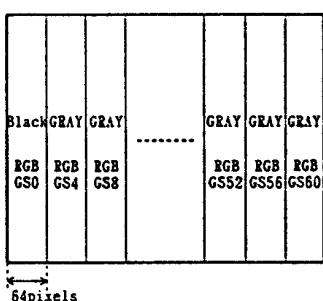Typical current situation : ($V_{cc}=+5\text{V}$)

16-Gray-scale pattern

(Each RGB data:GSi is shown at 6-5.)

6-1-b) Backlight


The backlight system is an edge lighting type with twin CCFTs.

The characteristics of single lamp are shown in the following table.

T_a = 25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Remark |
|------------------------|----------------|-------|------|------|-------|----------------------------------|
| Lamp voltage | V _L | — | 530 | — | Vrms | 【Note 1】 |
| Lamp current | I _L | 2.5 | 5.5 | 6.0 | mArms | — |
| Lamp power consumption | P _L | — | 2.9 | — | W | 【Note 2】 |
| Frequency | F _L | 30 | 40 | 50 | KHz | 【Note 3】 |
| Kick-off voltage | V _s | — | — | 1100 | Vrms | T _a =25°C 【Note 4】 |
| | | — | — | 1400 | Vrms | T _a =0°C |
| Lamp life time | T _L | 10000 | — | — | hour | 【Note 5】 |

【Note 1】 Lamp current is measured with current meter for high frequency as shown below.

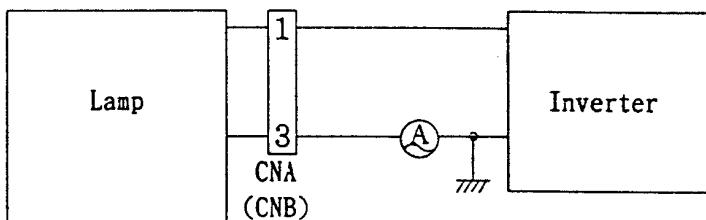

*. 3pin is V_{low}.

【Note 2】 Calculated values for reference.(I_L×V_L)

【Note 3】 Lamp frequency may produce interference with horizontal sync. frequency, and interference may cause beat on the display.

Therefore lamp frequency shall be as different as possible from that of horizontal sync signal to avoid interference.

【Note 4】 The open output voltage of the inverter shall be maintained for more than 1s ; otherwise the lamp may not be turned on.


【Note 5】 Lamp life time is defined that it applied either ① or ② under this condition (continuous turning on at T_a=25°C , I_L=5.5 mArms)

① Brightness becomes 50% of the original value under standard condition.

② Kick-off voltage at T_a=0°C exceeds maximum value, 1400 Vrms.

Note) The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of DC-AC inverter for the lamp. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) never occurred. When you confirm it, the module should be operated in the same condition as it is installed in your equipment.

6-2. Timing Characteristics of input signals

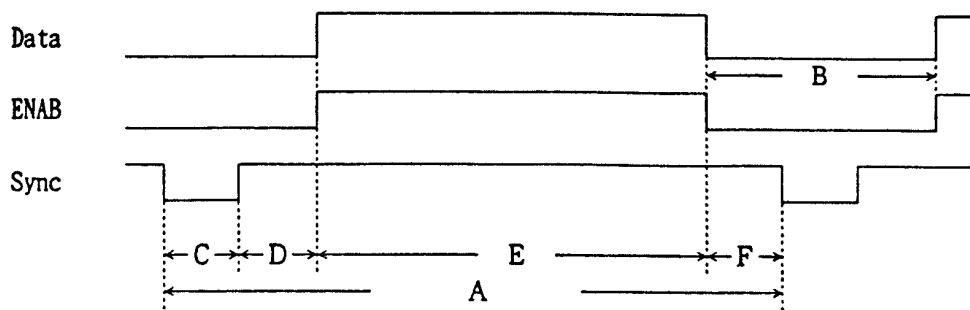

(Vertical)

| Item (symbol) | Min. | Typ. | Max. | Unit | Remark |
|---|------|--------|------|------|----------|
| Vsync cycle(T_{VA}) | — | 16.666 | — | ms | negative |
| | 803 | 806 | — | line | |
| Blanking period(T_{VB}) | 4 | 38 | — | line | — |
| Sync pulse width(T_{VC}) | 4 | 6 | — | line | — |
| Back porch(T_{VD}) | 0 | 29 | — | line | — |
| Sync pulse width + Back porch ($T_{VC}+T_{VD}$) | 35 | 35 | 35 | line | — |
| Active display area(T_{VE}) | 768 | 768 | 768 | line | — |
| Front porch(T_{VF}) | 0 | 3 | — | line | — |

(Horizontal)


| Item (symbol) | Min. | Typ. | Max. | Unit | Remark |
|---------------------------------|------|--------|------|-------|----------|
| Hsync cycle(T_{HA}) | 19.2 | 20.677 | — | μs | negative |
| | 520 | 672 | — | clock | |
| Blanking period(T_{HB}) | 8 | 160 | — | clock | — |
| Sync pulse width(T_{HC}) | 4 | 68 | — | clock | — |
| Back porch(T_{HD}) | 0 | 80 | — | clock | — |
| Active display area(T_{HE}) | 512 | 512 | 512 | clock | — |
| Front porch(T_{HF}) | 4 | 12 | — | clock | — |

(Clock)

| Item | Min. | Typ. | Max. | Unit | Remark |
|-----------|------|------|------|------|---------|
| Frequency | 25.0 | 32.5 | 35.0 | MHz | 【Note1】 |


【Note1】 Two pixel-data are sampled at a time.

(Hsync - Vsync Phase difference)

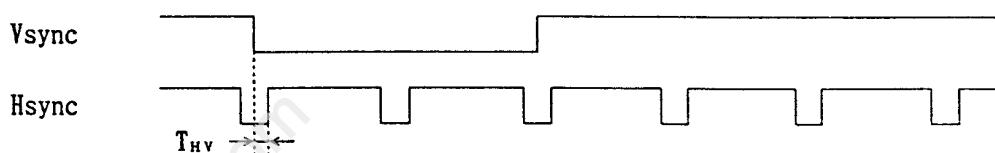

| Item | Min. | Typ. | Max. | Unit | Remark |
|---|------|------|-----------------|-------|--------|
| Hsync - Vsync Phase difference (T_{HV}) | 1 | — | $T_{HA}-T_{HC}$ | clock | — |

(Hsync-ENAB Phase difference)

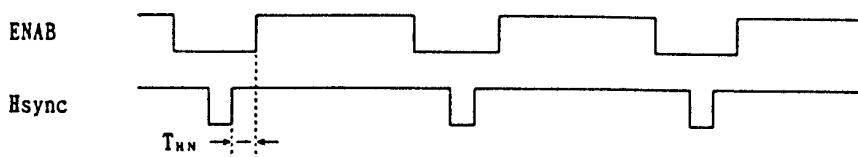

| Item | Min. | Typ. | Max. | Unit | Remark |
|---|------|------|------|-------|--------|
| Hsync-ENAB Phase difference(T_{HN}) | 0 | - | 186 | clock | - |

6-3. Display position

| Item | Standards | Beginning | Ending | Unit | Remark |
|------------|-----------------------|-----------|--------|-------|---------|
| Horizontal | rising edge of ENAB | 0 | 512 | clock | - |
| | falling edge of Hsync | 148 | 660 | clock | 【Note1】 |
| Vertical | falling edge of Vsync | 35 | 803 | line | - |

【Note1】 ENAB signal must be fixed to low.

Note)

(Horizontal display direction)

When ENAB is fixed to low, 148 clocks are counted from Hsync falling edge and data from after are available. If you need other timing, please use ENAB signal.

(Vertical display direction)

35 lines are counted from Vsync falling edge and data from next line are available.

(Note of ENAB signal)


Do NOT use ENAB for positioning of the vertical display direction.

ENAB signal same as the display period must be input for the vertical blanking period.

Caution:


Image will not be displayed on the right position otherwise.

6-4. Input Signals and display position

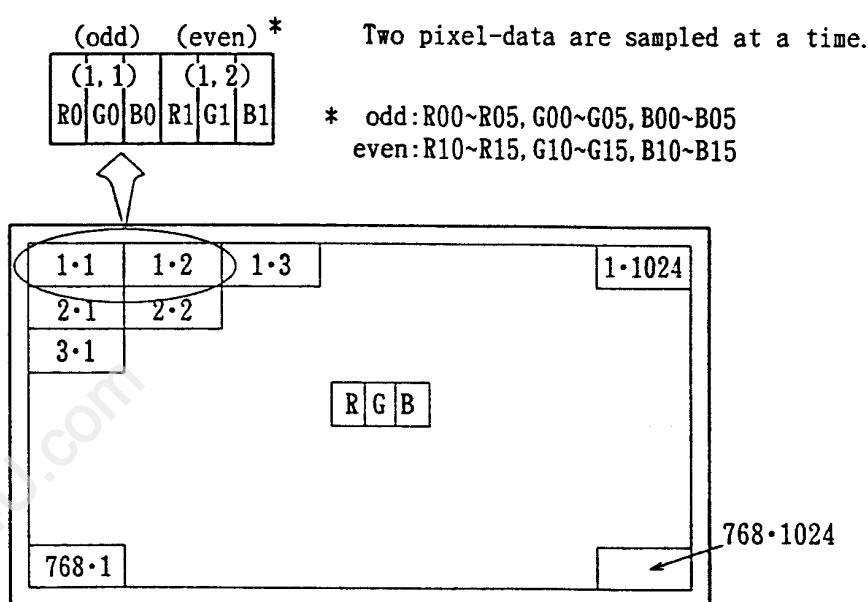

Display position of input data (V · H)

6-6.Timing characteristics of input signals

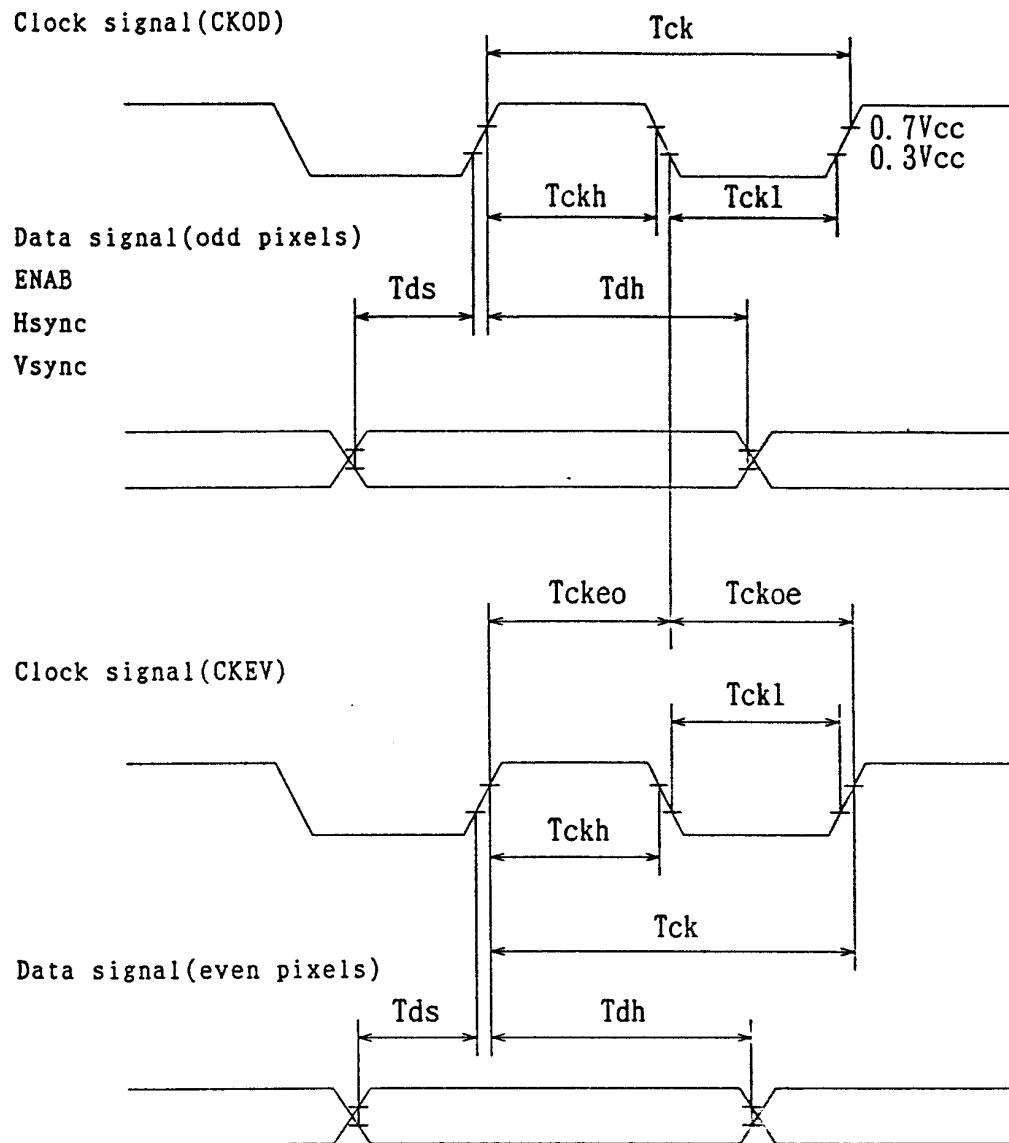

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|-------------------|--------|------|------|------|------|
| Clock period | Tck | 26 | 30 | 40 | ns |
| Clock high time | Tckh | 9 | - | - | ns |
| Clock low time | Tckl | 12 | - | - | ns |
| Data setup time | Tds | 8 | - | -- | ns |
| Data hold time | Tdh | 5 | - | - | ns |
| CKEV to CKOD time | Tccko | 6 | - | - | ns |
| CKOD to CKEV time | Tckoe | 6 | - | - | ns |

6-5. Input Signals, Basic Display Colors and Gray Scale of Each Color

| color & | | Data signal | | |
|---------------------|-------------|--------------------|--------------------|--------------------|
| gray | odd | R00R01R02R03R04R05 | G00G01G02G03G04G05 | B00B01B02B03B04B05 |
| scale | even | R10R11R12R13R14R15 | G10G11G12G13G14G15 | B10B11B12B13B14B15 |
| Basic color | Black | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | Blue | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 1 1 1 1 1 1 |
| | Green | 0 0 0 0 0 0 | 1 1 1 1 1 1 | 0 0 0 0 0 0 |
| | Light blue | 0 0 0 0 0 0 | 1 1 1 1 1 1 | 1 1 1 1 1 1 |
| | Red | 1 1 1 1 1 1 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | Purple | 1 1 1 1 1 1 | 0 0 0 0 0 0 | 1 1 1 1 1 1 |
| | Yellow | 1 1 1 1 1 1 | 1 1 1 1 1 1 | 0 0 0 0 0 0 |
| | White | 1 1 1 1 1 1 | 1 1 1 1 1 1 | 1 1 1 1 1 1 |
| Gray Scale of Red | Black (GS0) | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | ↑ (GS1) | 1 0 0 0 0 0 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | Darker | 0 1 0 0 0 0 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | ↑ | ↑ | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | ↓ | ↓ | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | Brighter | 1 0 1 1 1 1 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | ↓ (GS62) | 0 1 1 1 1 1 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | Red (GS63) | 1 1 1 1 1 1 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| Gray Scale of Green | Black (GS0) | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | ↑ (GS1) | 0 0 0 0 0 0 | 1 0 0 0 0 0 | 0 0 0 0 0 0 |
| | Darker | 0 0 0 0 0 0 | 0 1 0 0 0 0 | 0 0 0 0 0 0 |
| | ↑ | 0 0 0 0 0 0 | ↑ | 0 0 0 0 0 0 |
| | ↓ | 0 0 0 0 0 0 | ↓ | 0 0 0 0 0 0 |
| | Brighter | 0 0 0 0 0 0 | 1 0 1 1 1 1 | 0 0 0 0 0 0 |
| | ↓ (GS62) | 0 0 0 0 0 0 | 0 1 1 1 1 1 | 0 0 0 0 0 0 |
| | Green(GS63) | 0 0 0 0 0 0 | 1 1 1 1 1 1 | 0 0 0 0 0 0 |
| Gray Scale of Blue | Black (GS0) | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 0 0 0 0 0 0 |
| | ↑ (GS1) | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 1 0 0 0 0 0 |
| | Darker | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 0 1 0 0 0 0 |
| | ↑ | 0 0 0 0 0 0 | 0 0 0 0 0 0 | ↑ |
| | ↓ | 0 0 0 0 0 0 | 0 0 0 0 0 0 | ↓ |
| | Brighter | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 1 0 1 1 1 1 |
| | ↓ (GS62) | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 0 1 1 1 1 1 |
| | Blue(GS63) | 0 0 0 0 0 0 | 0 0 0 0 0 0 | 1 1 1 1 1 1 |

0 : Low level voltage 1 : High level voltage

Each color is displayed in 64 gray scales from 6 bit data signal input.
 According to the combination of total 18 bit data, 262,144 colors
 are displayed.

7. Optical Characteristics

Ta=25°C, Vcc=+5V

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit | Remark |
|-----------------------|-----------------------------|--------------------|------|-------|------|-------------------|---------|
| Viewing angle range | Horizontal $\theta_{21,22}$ | CR>10 | 35 | - | - | Deg. | 【Note1】 |
| | Vertical θ_{11} | | 10 | - | - | Deg. | |
| | θ_{12} | | 30 | - | - | Deg. | |
| Contrast ratio | CR | $\theta = 0^\circ$ | 100 | - | - | | 【Note2】 |
| Response time | Rise τ_r | | - | 30 | - | ms | 【Note3】 |
| | Fall τ_f | | - | 50 | - | ms | |
| Luminance of white | Y_L | | 105 | 150 | - | cd/m ² | - |
| Chromaticity of white | X | | - | 0.290 | - | - | - |
| | Y | | - | 0.320 | - | - | - |
| White uniformity | δ_w | | - | - | 1.25 | - | 【Note4】 |

- * The measurement shall be executed after brightness of the backlight has reached its saturation point. ($I_L=5.5$ mA rms)
- The optical characteristics are measured in a darkroom or equivalent state with the method shown in Fig.3. And these characteristics except for White uniformity are measured at the center of the screen.


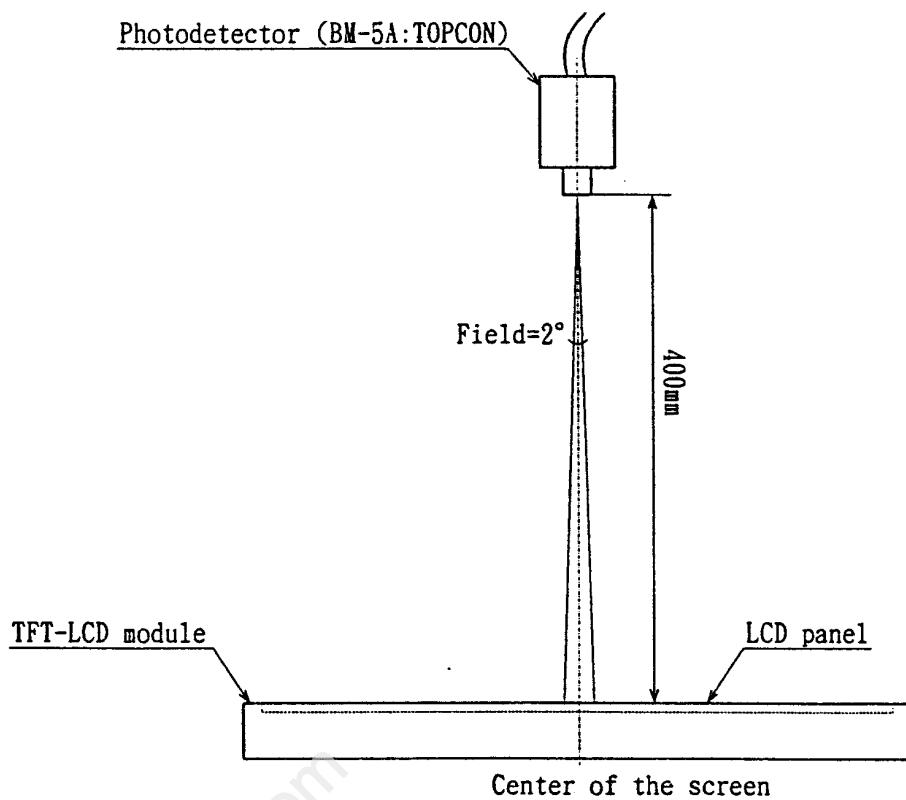


Fig. 3 Optical characteristics measurement method

【Note1】Definitions of viewing angle:

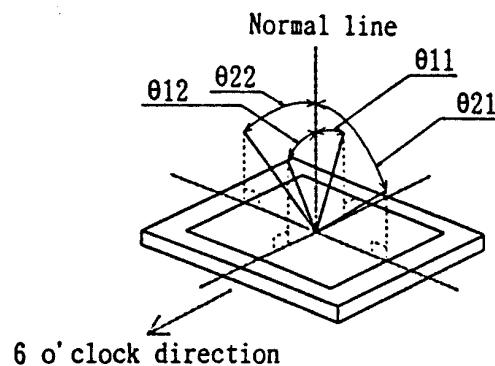


【Note2】Definitions of Contrast Ratio:

The contrast ratio is defined as follows.

$$\text{Contrast Ratio} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

【Note3】Definitions of Response Time:


The response time shall be measured as the following figure by switching the input signals for "black" ON and OFF.

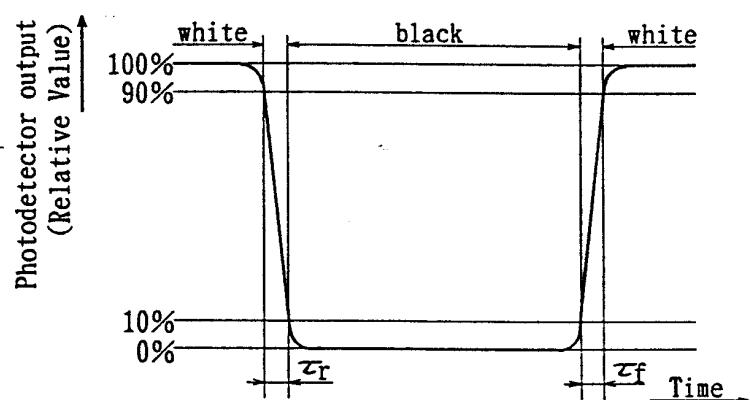

[Note4] Definition of White uniformity:

The white uniformity is defined as the following equation among the values measured at the 5 spots(A~E).

$$\frac{\text{maximum luminance (brightness)}}{\text{minimum luminance (brightness)}}$$

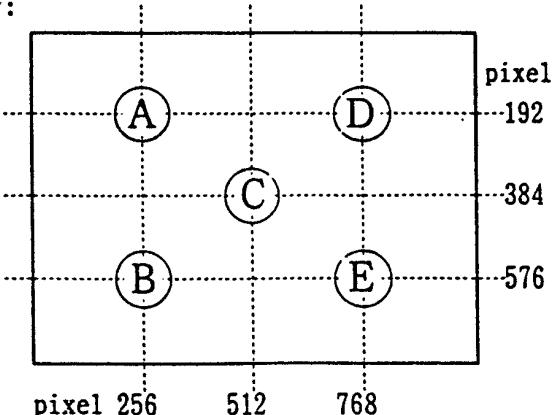**8. Display quality**

The display quality of this module shall be in compliance with the Delivery Inspection Standard.

9. Handling Precautions

- 9-1) Be sure to insert the cable into the connector or take out of the connector after turning off the power supply on the set side.
- 9-2) Others
 - a) When installing the module, be sure to fix the module on the same plane, taking care not in order to warp or twist the module.
 - b) Since the polarizer is easily damaged, pay attention not in order to scratch it.
 - c) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
 - d) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
 - e) Since the glass is used in the module, it may break or crack if dropped or bumped on hard surface. Handle with care.
 - f) To protect the liquid crystal from ultraviolet rays, don't leave it in direct sunlight or strong ultraviolet rays for long.

- g) Since CMOS LSI is used in this module, take care of static electricity and ground your body when handling.
- h) Observe all other precautionary requirements in handling components.

10. Packing form

- a) Piling-up number of cartons : MAX. 6 cartons
- b) Package quantity in one carton : MAX. 10 cartons
- c) Carton size : 380mm(W)x384mm(H)x315mm(D)
- d) Total mass of 1 carton filled with full modules : 13kg

11. Reliability test items

| No. | Test item | Conditions |
|-----|---|---|
| 1 | High temperature storage test | Ta=60°C 240h |
| 2 | Low temperature storage test | Ta=-25°C 240h |
| 3 | High temperature & high humidity operation test | Ta=40°C:95%RH 240h (No condensation) |
| 4 | High temperature operation test | Ta=50°C 240h (The panel temp must be less than 60°C) |
| 5 | Low temperature operation test | Ta=0°C 240h |
| 6 | Vibration test (non-operating) | Frequency:10~57Hz Vibration width(one side):0.075mm Frequency:58~500Hz Gravity:9.8m/s ² Sweep time: 11 min. Test period: 3h (1 hour for each direction of X,Y,Z) |
| 7 | Shock test (non-operating) | Max. gravity : 490m/s ² Pulse width: 11ms, sine wave Direction: ±X,±Y,±Z once for each direction. |


【Result Evaluation Criteria】

Under the display quality test conditions with normal operation state, these shall be no change which may affect practical display function.

12. Others

1) Indication of Lot No. Label

This product indicate manufacture name "SHARP", Model No. "LQ12DX12", "Product No." and "MADE IN JAPAN" on the module.(back side)

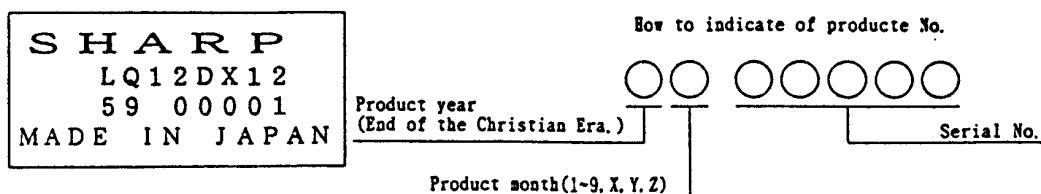


- 2) Adjusting volumes have been set optimally before shipment, so do not change any adjusted values. If adjusted values are changed, the data mentioned in this technical literature may not be satisfied.
- 3) Disassembling the module can cause permanent damage and should be strictly avoided.
- 4) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.
- 5) If any problem occurs in relation to the description of this specification, it shall be resolved through discussion with spirit of cooperation.

REIN Components GmbH


Lötscher Weg 66 · D-41334 Nettetal
Telefon +49 (0)2153-733 112 · Telefax +49 (0)2153-733 575
email: rein@rnc.memec.com · http://www.rein.memec.com



A MEMEC Group Company within VEBA Electronics Inc.

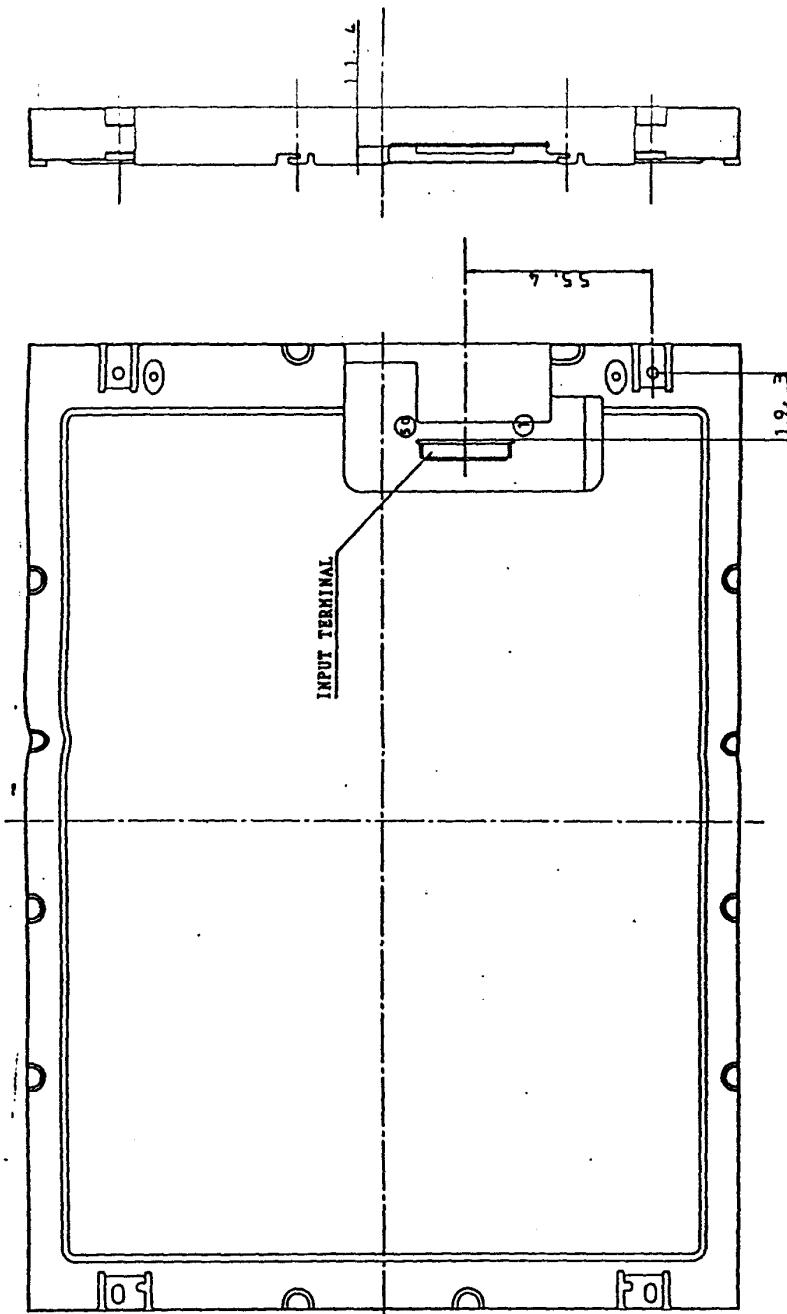

LQ12DX12 MODULE OUTLINE DIMENSIONS(BACK SIDE)

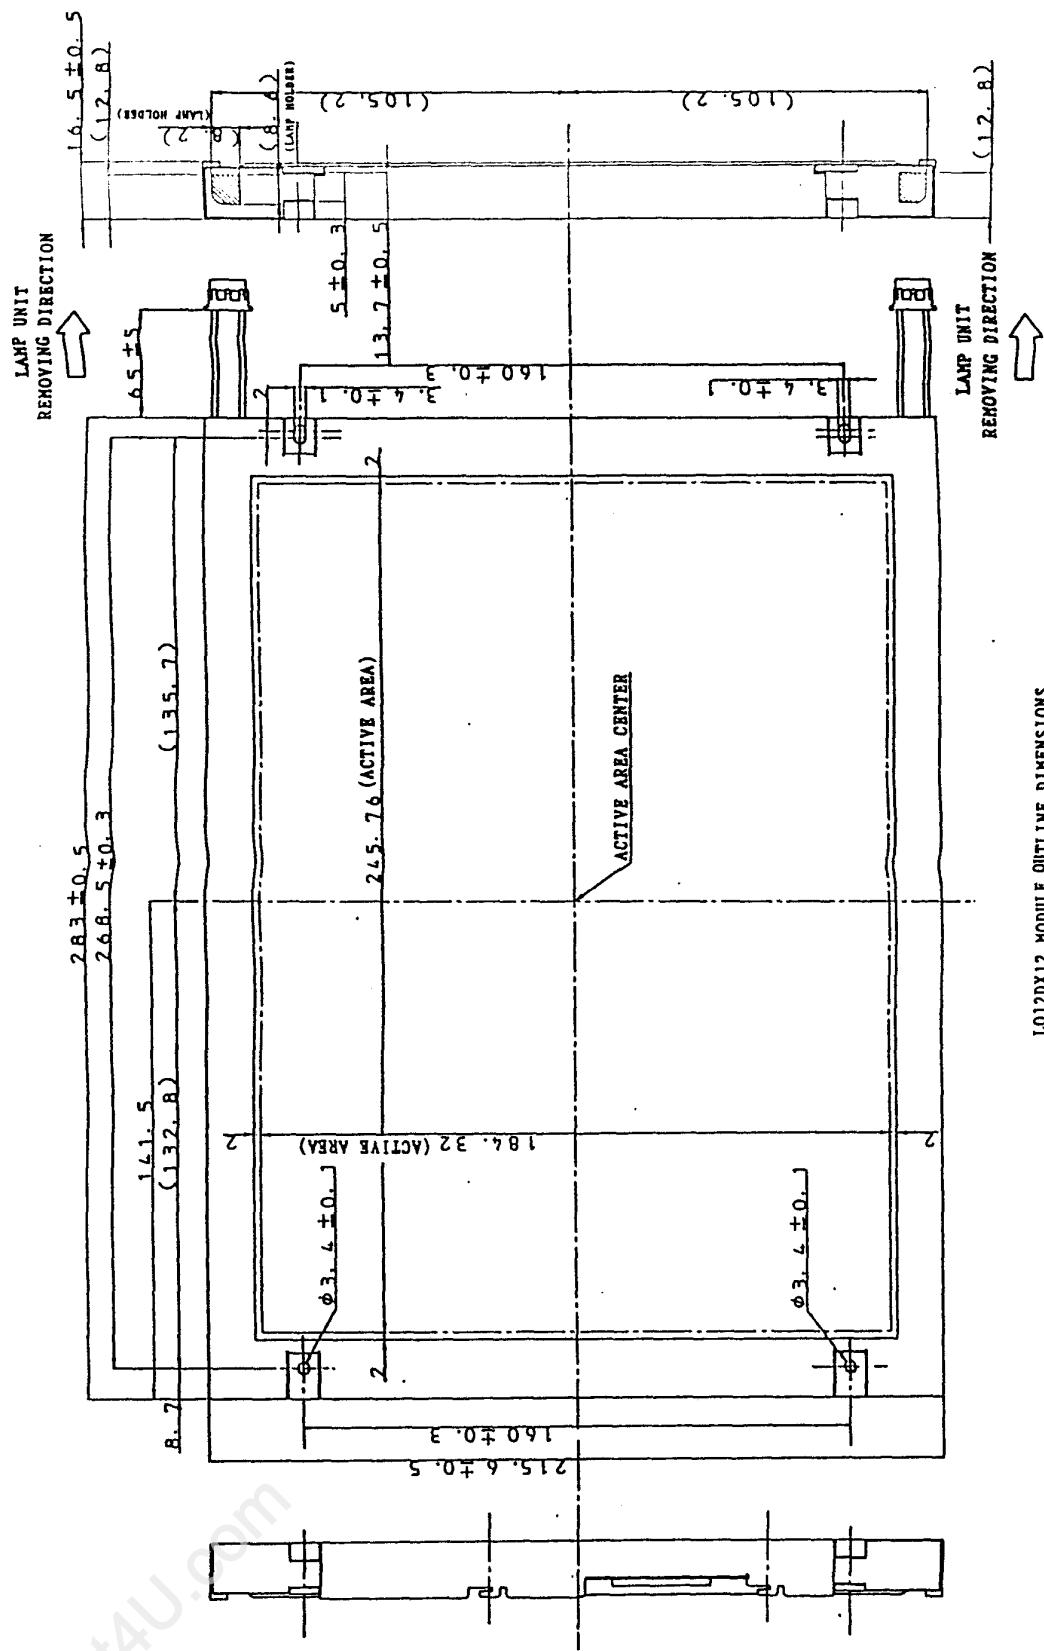

LQ12DX12 MODULE OUTLINE DIMENSIONS