muRata Inductor Data Sheet






< List of part numbers with package codes >

LQH32PB330MN0L , LQH32PB330MN0K , LQH32PB330MN0B





Notes

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value.

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.



Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	2000
К	φ330mm Embossed taping	7500
В	Packing in bulk	500

Mass	(Тур.)
1 piece	0.044g

Specifications

Inductance	33μH ±20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	380mA
Rated current (Itemp) (Based on Temperature rise)	390mA(Ambient temp.85°C) 190mA(Ambient temp.105°C)
Max. of DC resistance	1.38Ω
Avg. of DC resistance	1.15Ω±20%
Self resonance frequency (min.)	13MHz
Operating temperature range (Self-temperature rise is included)	-40°C to 125°C
Operating temperature range (Self-temperature rise is not included)	-40°C to 105°C
Class of magnetic shield	Magnetic Resin
Series	LQH32PB_N0 1 of 2

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued


without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

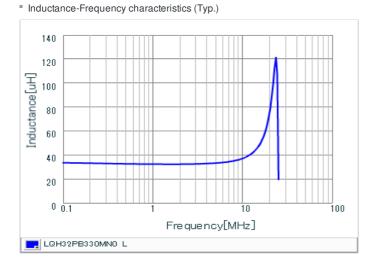

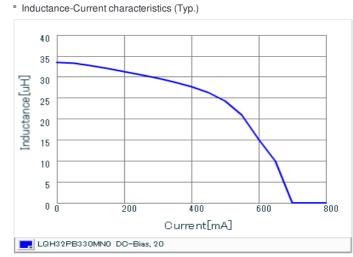

Temperature rise characteristics (Typ.)

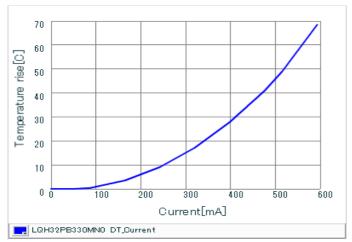

🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 2