


# LQM2HPN2R2MJH#

# indicates a package specification code.



< List of part numbers with package codes >  
LQM2HPN2R2MJHL , LQM2HPN2R2MJHB

## Shape

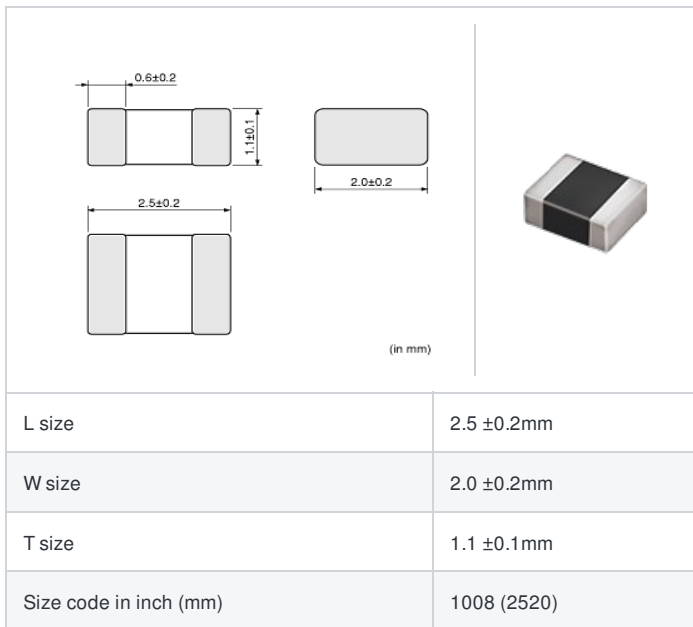

## Notes

When rated current is applied to the products, inductance will be within  $\pm 30\%$  of initial inductance value.  
When rated current is applied to the products, the temperature rise caused by self-heating will be 40 °C or less.  
Keep the temperature of product (ambient temperature plus self-generation of heat) under 125 °C.

## References

Packaging code	Specifications	Minimum quantity
L	φ180mm Embossed taping	3000
B	Packing in bulk	1000

Mass (Typ.)	
1 piece	0.027g

## Specifications


Inductance	2.2μH ±20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	1.4A(Max) / 1.6A(Typ.)
Rated current (Itemp) (Based on Temperature rise)	1.5A(Max) / 1.9A(Typ.)
Max. of DC resistance	0.138Ω
Avg. of DC resistance	0.11Ω (typ.)
Self resonance frequency (min.)	30MHz
Operating temperature range	-40°C to 85°C
Class of magnetic shield	Ferrite Core
Series	LQM2HPN_JH

### Attention


- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

## Chart of characteristic data (The charts below may show another part number which shares its characteristics.)


■ Inductance-Frequency characteristics (Typ.)

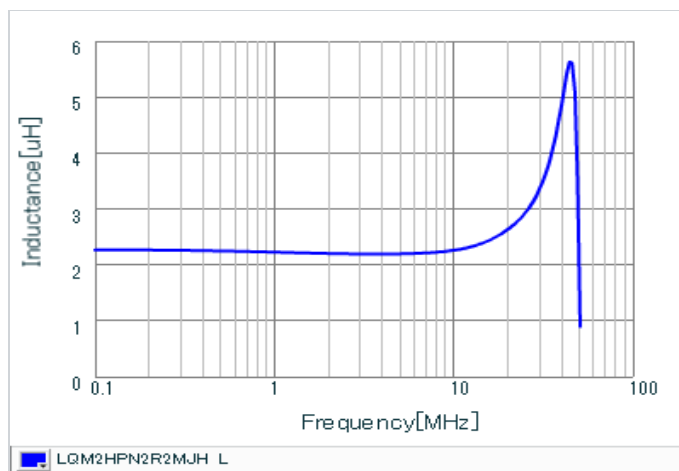

■ Inductance-Current characteristics (Typ.)

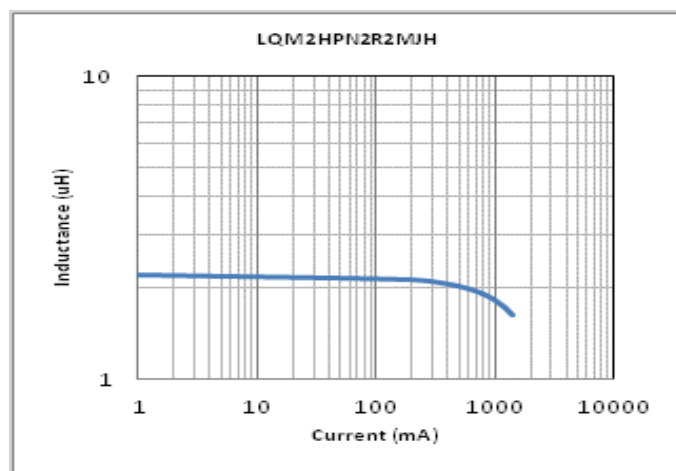

■ Temperature rise characteristics (Typ.)

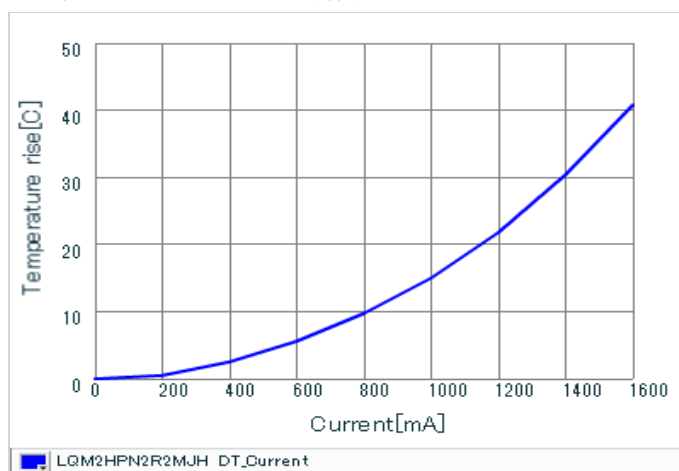

### ⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.