muRata Inductor Data Sheet

LQM2MPN2R2NG0#

"#" indicates a package specification code.



< List of part numbers with package codes > LQM2MPN2R2NG0L , LQM2MPN2R2NG0B



↓ 0.5±0.2 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15 ↓ 1.6±0.15	
L size	2.0 ±0.15mm
W size	1.6 ±0.15mm
T size	0.9 ±0.1mm
Size code in inch (mm)	0806 (2016)

Notes

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM2MPN_G0 series.

Please apply the derating curve shown in the chart according to the operating temperature.

Please consider "Notice (Rating)."

When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40 °C max.

References

Packaging code	Specifications	Minimum quantity
L	ф180mm Embossed taping	3000
В	Packing in bulk	1000

Mas	s (Тур.)
1 piece	0.012g

Specifications

Inductance	2.2µH ±30%
Inductance test frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C)
Max. of DC resistance	0.138Ω
Avg. of DC resistance	0.11Ω(typ.)
Self resonance frequency (min.)	40MHz
Operating temperature range	-55~125°C
Class of magnetic shield	Ferrite Core
Series	LQM2MPN_G0

1 of 3

🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Derating of Rated Current




\rm Attention

This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

muRata Murata Manufacturing Co., Ltd.


Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

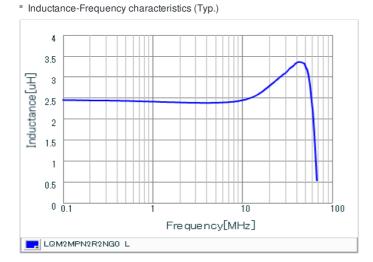

2.5 2 [nductance[uH] 1.5 1 0.5 0 ð 200 400 600 800 1000 1200 1400 Current[mA] LQM2MPN2R2NG0 DC-Bias, 20

Inductance-Current characteristics (Typ.)

Temperature rise characteristics (Typ.)

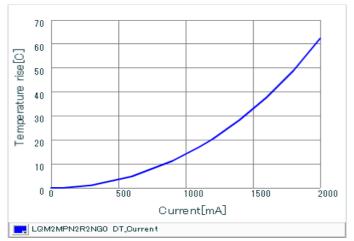

3 of 3

🔔 Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.