

LQP02HQ0N4W02#

"#" indicates a package specification code.
















< List of part numbers with package codes > LQP02HQ0N4W02E , LQP02HQ0N4W02L , LQP02HQ0N4W02B

Shape

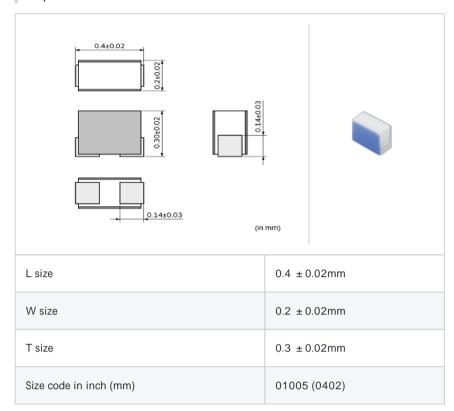

References

Packaging code	Specifications	Minimum quantity
L	180mm Embossed taping	30000
В	Packing in bulk	500
E	180mm Embossed taping (W8P2*) *Width: 8mm, Pocket pitch: 2mm	15000

Mass (Typ.)		
1 piece	0.00085g	

Specifications

Inductance	0.40nH ± 0.05nH
Inductance test frequency	500MHz
Rated current (Itemp) (Based on Temperature rise)	1000mA
Max. of DC resistance	0.03
Q (min.)	14
Q test frequency	500MHz
Self resonance frequency (min.)	17GHz
Operating temperature range (Self-temperature rise is not included)	-55 ~ 125
Class of magnetic shield	No magnetic shield

1 of 2



1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it 's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Inductance-Frequency characteristics (Typ.)

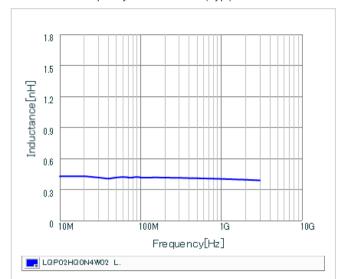

Q-Frequency characteristics (Typ.)

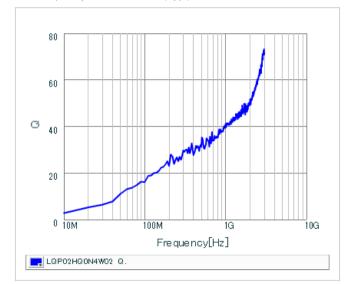

2 of 2

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please reviewour product specifications or consult the approval sheet for product specifications before ordering.



muRata Murata Manufacturing Co., Ltd.

Last updated: 2016/02/06