



## LR2967

Preliminary

CMOS IC

## 2A, LOW DROPOUT REGULATOR

### DESCRIPTION

The **UTC LR2967-XX** is CMOS-based positive voltage and a very low dropout regulator IC that minimum input voltage is 2.5V and is capable of delivering the continuous output load current up to 2.0A.

It has features of low dropout (typically 400mV at 2A), a very low quiescent current (typically 300uA at 0.1A).

The output voltage can be set from 0.5V to ( $V_{IN} - V_{DRP}$ ) with an external resistor divider and it has  $\pm 2\%$  accuracy through all temperature ranges include the line as well as load variations. It is allowed to use a small 4.7 $\mu$ F MLCC input and output capacitor to deliver the current with the stable operation.

Built-in Soft-Start function reduces the inrush current and the other features are include over current protection (OCP), short-circuit protection (SCP), and thermal shut down protection (TSD).

### FEATURES


- \* Input Voltage Range: 2.5V~6.0V
- \* Supply Current :: Typ. 300uA
- \* Current limit : Min. 3A
- \* Adjustable Output from 0.5V
- \* LR2967-XX: Typ 0.4V Dropout @  $I_{OUT}=2.0A$
- \* Compatible with MLCC Capacitors
- \* Built-in Soft-Start Limits Inrush Current
- \* Built-in Thermal Shutdown Protection
- \* Built-in Over Current & Short Circuit Protection

### ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
LR2967L-xx-SH2-R	LR2967G-xx-SH2-R	HSOP-8	Tape Reel

Note: xx: Output Voltage, refer to Marking Information.

<p>LR2967G-xx-SH2-R</p> <p>(1) Packing Type (2) Package Type (3) Output Voltage Code (4) Green Package</p>	<p>(1) R: Tape Reel (2) SH2: HSOP-8 (3) xx: refer to Marking Information (4) G: Halogen Free and Lead Free, L: Lead Free</p>
--	--

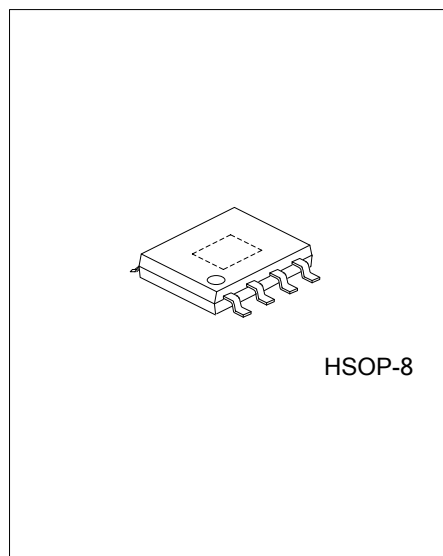


HSOP-8

## MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
HSOP-8	AD: ADJ	


## PIN CONFIGURATION

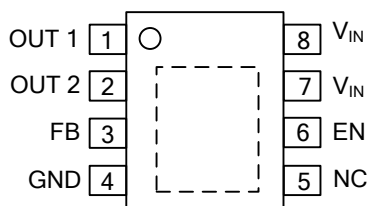

## PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1, 2	OUT	Voltage Regulator Output Pin
3	FB	Feedback Pin. Connect to output through a voltage-divider to set the output. Recommended that the tolerance of feedback resistors is below 1%.
4	GND	Ground Pin
5	NC	NC
6	EN	Chip Enable Pin
7, 8	V <sub>IN</sub>	Input Supply Voltage Pin.

## BLOCK DIAGRAM

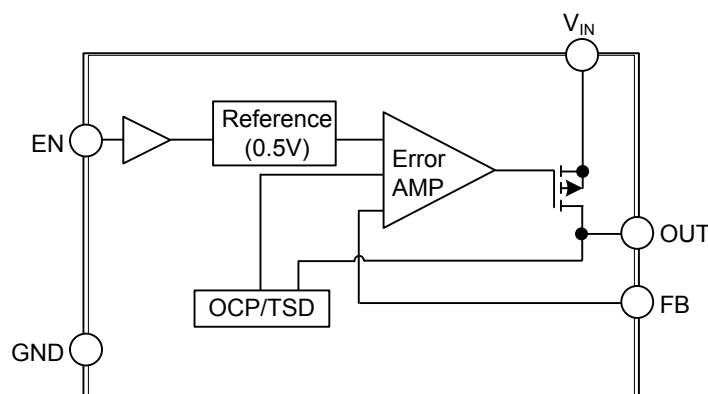

■ ABSOLUTE MAXIMUM RATING ( $T_A=25^{\circ}\text{C}$  unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	-0.3 ~ 7	V
Output Voltage	OUT	-0.3 ~ $V_{IN}+0.3$	V
Junction Temperature	$T_J$	+150	$^{\circ}\text{C}$
Storage Temperature	$T_{STG}$	-65~150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage Range	$V_{IN}$	2.5 ~ 6.0	V
Ambient Temperature Range	$T_A$	-40 ~ +85	$^{\circ}\text{C}$

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	$\theta_{JA}$	143	$^{\circ}\text{C/W}$


■ ELECTRICAL CHARACTERISTICS

All parameters are guaranteed over the operational supply voltage and temperature range. Operating conditions unless otherwise noted are:  $V_{IN}=5\text{V}$ ,  $\text{OUT}=2.5\text{V}$  and  $T_A=25^{\circ}\text{C}$ . Typical values are for information only.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>Supply Voltage</b>						
Quiescent Current	$I_Q$	$I_{OUT}=100\text{mA}$		300		$\mu\text{A}$
Shutdown Current	$I_{STD}$	$V_{IN}=6\text{V}$ , $V_{EN}=\text{GND}$		0.2	2	$\mu\text{A}$
<b>Feedback (FB)</b>						
Feedback Voltage Accuracy	$V_F$	$I_{OUT}=10\text{mA}$ , $T_A=25^{\circ}\text{C}$	490	500	510	mV
Input Bias Current	$I_F$	$V_{FB}=0.5\text{V}$ , $V_{IN}=6\text{V}$		0.001	0.1	$\mu\text{A}$
<b>Output (OUT)</b>						
Output Accuracy	$V_{OUT}$		-2		2	%
Load Regulation	$R_{LO}$	$I_{OUT}=1\text{mA}$ to 1.5A		0.1	2	%/A
Line Regulation	$R_{LN}$	$V_{IN}=2.2\sim 6\text{V}$ , $V_{OUT}=1.225\text{V}$ , $I_{OUT}=1\text{mA}$	-0.2		0.2	%/V
Dropout Voltage	$V_{DRP}$	$I_{OUT}=2.0\text{A}$ , $V_{FB}=480\text{mV}$		400		mV
		$I_{OUT}=1.5\text{A}$ , $V_{FB}=480\text{mV}$		140	280	
Current Limit	$I_C$		3.0			A
Load transient (Note 1)	$L_{OT}$	$I_{OUT}=20\text{mA}$ to 2A,		3		%
Line Transient (Note 1)	$R_{NT}$	$\Delta V_{IN}=0.5\text{V}$		3		%
<b>Enable (EN)</b>						
Input Threshold	$V_{ENH}$	EN rising, $V_{IN}=\text{OUT}+1\text{V}\sim 6\text{V}$	1.2		6	V
	$V_{ENL}$	EN falling, $V_{IN}=\text{OUT}+1\text{V}\sim 6\text{V}$			0.4	V
Input Bias Current	$I_{EN}$	EN=0 or 6V	-1	0	1	$\mu\text{A}$
<b>Thermal Shutdown (TSD) (Note 1)</b>						
TSD Threshold	$T_{SDON}$	TSD On		165		$^{\circ}\text{C}$
	$T_{SDOFF}$	TSD Off		145		$^{\circ}\text{C}$

Note: Guaranteed by design but not production tested.

## ■ TYPICAL APPLICATION CIRCUIT

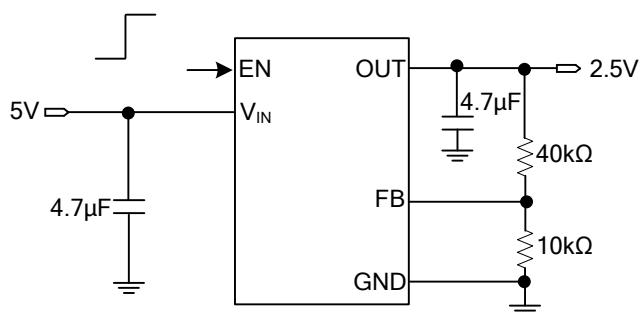

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.