



LR9283

CMOS IC

300mA LDO REGULATOR


DESCRIPTION

The UTC **LR9283** is a typical LDO (linear regulator) with the features of high output voltage accuracy, low supply current, low ON-resistance. Internally, there're many functions of UTC **LR9283** which can be seen in the block figure. There are a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit in each UTC **LR9283**.

The output voltage of these ICs is fixed with high accuracy.

FEATURES

- * Supply current (TYP=1 μ A)
- * Output voltage accuracy ($\pm 1\%$)
- * Output voltage range (1.2V~5V)
- * Dropout voltage (TYP=200mV) ($I_{OUT}=100mA$, $V_{OUT}=1.8V$ Output type)
- * Line regulation (TYP=0.05%/V)
- * Built-in Current Limiter, OTP



SOT-23-5
(JEDEC TO-236)

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
LR9283L-xx-AE5-R	LR9283G-xx-AE5-R	SOT-23-5	Tape Reel


Note: xx: Output Voltage, refer to Marking Information.

LR9283-XXG-xx-AE5-R


- (1) Packing Type
- (2) Package Type
- (3) Output Voltage Code
- (4) Green Package

- (1) R: Tape Reel
- (2) AE5: SOT-23-5
- (3) xx: refer to Marking Information
- (4) G: Halogen Free and Lead Free, L: Lead Free

MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-23-5	12: 1.2V 15: 1.5V 18: 1.8V 20: 2.0V 28: 2.8V 30: 3.0V 33: 3.3V 36: 3.6V 40: 4.0V	 L: Lead Free G: Halogen Free Voltage Code


PIN CONFIGURATION

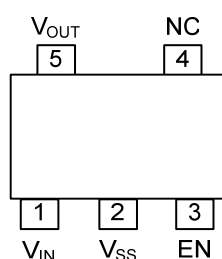

PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V _{IN}	Positive power supply input voltage.
2	V _{SS}	Ground
3	EN	Chip Enable
4	NC	No Connect
5	V _{OUT}	Regulated output voltage.

BLOCK DIAGRAM

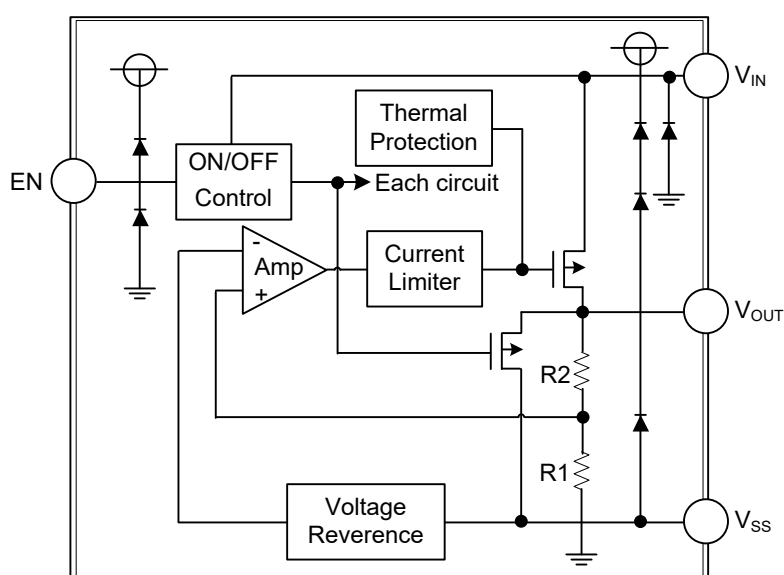

■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	7	V
Output Current	I_{OUT}	300	mA
Power Dissipation	P_D	350	mW
Operating Temperature	T_{OPT}	-40 ~ +125	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-40 ~ +150	$^{\circ}\text{C}$



Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

($V_{IN}=V_{OUT}+1\text{V}$, $C_{IN}=C_{OUT}=1\mu\text{F}$, $T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage	V_{in}				6.5	V
DC Output Accuracy		$I_{OUT}=1\text{mA}$	-1		1	%
Dropout Voltage	V_{DIF}	$I_{OUT}=100\text{mA}$, $V_{OUT}=1.8\text{V}$		200		mV
Supply Current	I_{SS}	$I_{OUT}=0\text{mA}$		1.0	1.5	μA
Load Regulation	ΔV_{OUT}	$1\text{mA} \leq I_{OUT} \leq 100\text{mA}$		3		mV
Line Regulation	$\frac{\Delta V_{OUT}}{V_{OUT} \cdot \Delta V_{IN}}$	$I_{OUT}=10\text{mA}$ $V_{OUT}+1\text{V} \leq V_{IN} \leq 6.5\text{V}$		0.05	0.35	%/V
Output Current Limit	I_{LIM}		300			mA
Short Current	I_{SC}	$V_{OUT}=0\text{V}$		15		mA
EN "High" Voltage	$V_{EN} \text{ "H"}$		1.5		V_{IN}	V
EN "Low" Voltage	$V_{EN} \text{ "L"}$				0.3	V
Thermal Shutdown Temperature	T_{SD}			150		$^{\circ}\text{C}$
Thermal Shutdown Hysteresis	ΔT_{SD}			20		$^{\circ}\text{C}$

■ TYPICAL APPLICATION CIRCUIT

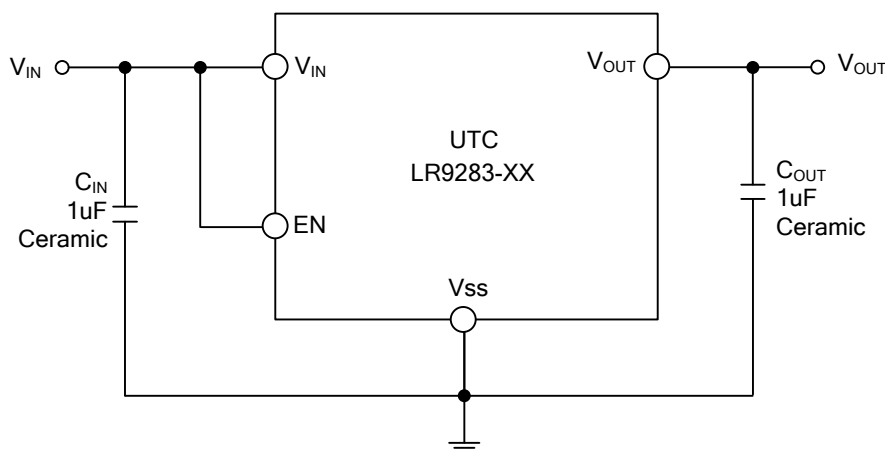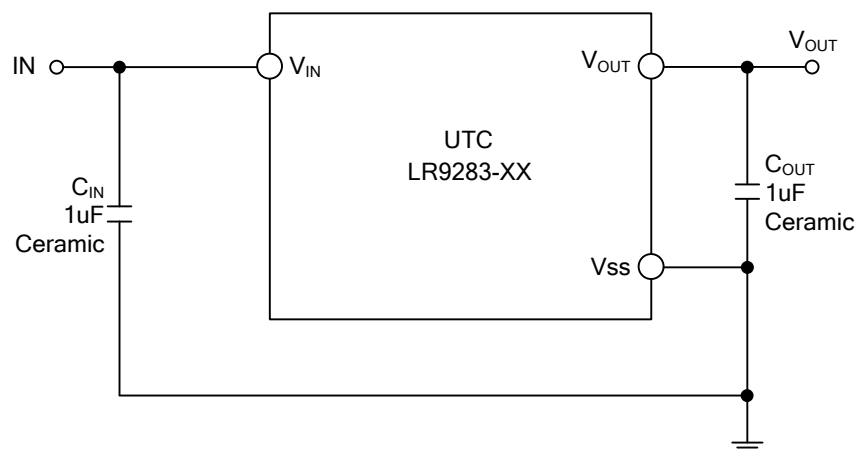

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.