

Features

- * ULTRABRIGHT YELLOW
- * HIGH LIGHT OUTPUT
- * RELIABLE AND RUGGED
- * IC COMPATIBLE

Absolute Maximum Ratings at $T_A=25^\circ\text{C}$

REVERSE VOLTAGE (<100 μA)	4.0 V
D.C. FORWARD CURRENT	30 mA
PULSE CURRENT (1/10 DUTY CYCLE, 0.1 ms PULSE WIDTH)	100 mA
OPERATING TEMPERATURE RANGE	-25°C TO $+85^\circ\text{C}$
STORAGE TEMPERATURE RANGE	-25°C TO $+100^\circ\text{C}$
LEAD SOLDERING TEMP. (1.6mm FROM BODY)	260°C FOR 5 SEC

Electrical/Optical Characteristics at $T_A=25^\circ\text{C}$

PART NUMBER	LED CHIP		LEN'S COLOR	PEAK WAVELENGTH @20mA(nm)	FORWARD VOLTAGE @20mA(V)		LUMINOUS INTENSITY @20mA(mcd)		VIEW ANGLE $2\theta_{1/2}$ (deg)
	MATERIAL	EMITTING COLOR			TYP.	MAX.	MIN.	TYP.	
LT1831-81-UR	InGaAlP ON GaAs	YELLOW	Y.D.	595	2.1	2.4	255	424	41
LT1832-81-UR	InGaAlP ON GaAs	YELLOW	W.D.	595	2.1	2.4	255	424	41
LT1833-81-UR	InGaAlP ON GaAs	YELLOW	W.C.	595	2.1	2.4	800	1400	19
LT1834-81-UR	InGaAlP ON GaAs	YELLOW	Y.C.	595	2.1	2.4	800	1400	19

(1) LENS COLOR

Y.D. YELLOW DIFFUSED

W.D. WHITE DIFFUSED

Y.C. YELLOW CLEAR

W.C. WATER CLEAR


(2) SPECIFICATIONS ARE SUBJECT TO CHANGE

WITHOUT NOTICE.

(3) ALL ABOVE COMPONENTS ARE CONSIDERED.

DEVIATIONS FROM STATED SPECIFICATIONS WILL REQUIRE A NEW PART NUMBER BE ASSIGNED.

Package Dimensions

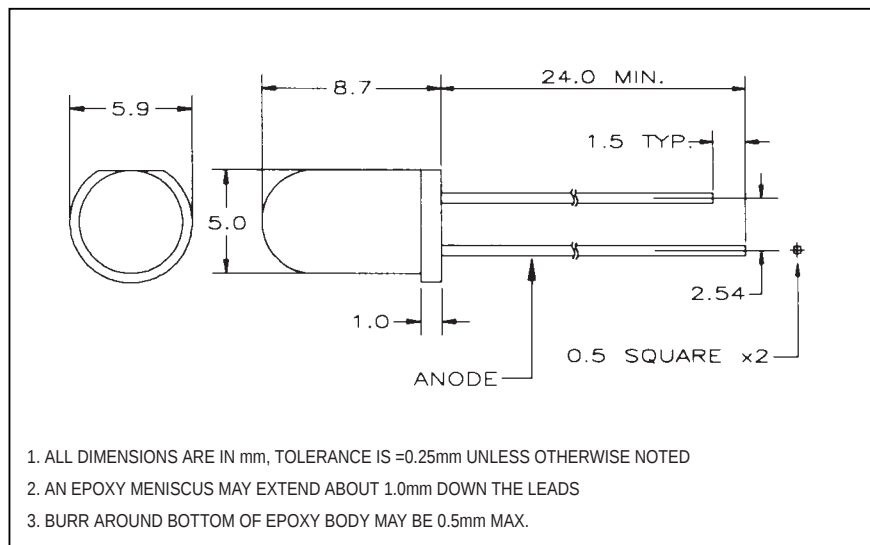

Radiation Pattern

