


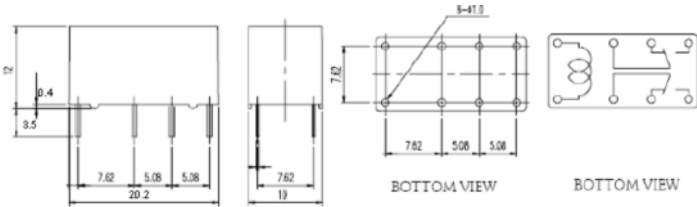

LT2S - 12VDC - T

Relay Type: \_\_\_\_\_  
Coil Voltage:- 5 ~ 24VDC \_\_\_\_\_  
Coil Sensitivity:- T: 0.2W \_\_\_\_\_

Features	Dimension L * W * H (mm)	20.2 * 10 * 12			
	Terminal Type	PCB			
	Weight	5 gm Approximately			
Contact Data	Contact Form, Resistance	2C, 100mΩ Max. @ 1A, 6VDC			
	Contact Material	Silver Alloy			
	Contact Capacity	1A @120VAC, 1A @24VDC			
Coil Data	Coil Voltage ( DC)	5 ~ 24 VDC			
	Coil Power Consumption	0.2W			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ± 10%	Pull in Voltage (VDC)	Drop Out Voltage (VDC)
		5 VDC	120	75%	10%
		9 VDC	400	75%	10%
		12 VDC	720	75%	10%
24 VDC		2880	75%	10%	
General Data	Dielectric Strength	600 VAC @50 Hz / Min (Between open Contacts)			
		1000 VAC @50 Hz / Min (Between open Contacts)			
	Insulation Resistance	100MΩ 500VDC			
	Electrical Life	1 x 10 <sup>5</sup>			
	Mechanical Life	1 x 10 <sup>7</sup>			
General Data	Operating Temperature	- 30 °C ~ + 70°C			
	Mounting Diagram				
Application	Telecommunication, Electronics equipment etc.				