

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LTBSHT702G12CS_

SPEC. NO.: LM702-12D-△

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

EDITED ON : SEPT.19.2007


Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN

[illegible]

1.MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTBSHT702G12CS_	—
2	Module Size	260.0 (W) x 174.0 (H) x 8.0 Max. (D)	mm
3	Dot Size	0.27 (W) x 0.27 (H)	mm
4	Dot Pitch	0.30 (W) x 0.30 (H)	mm
5	Number of Dots	640 (W) x 480 (H)	Dot
6	Duty	1/240	—
7	LCD Display Mode	Black and White(Normally Black/Negative Image)	—
8	Rear Polarizer	Transmission Type	—
9	Viewing Direction	6	O'clock
10	Backlight	CCFL	—
11	Controller	Excluded	—
12	DC/DC Converter	Excluded	—
13	Touch Panel	Excluded	—
14	Weight	350 (Approx.)	g

Note :

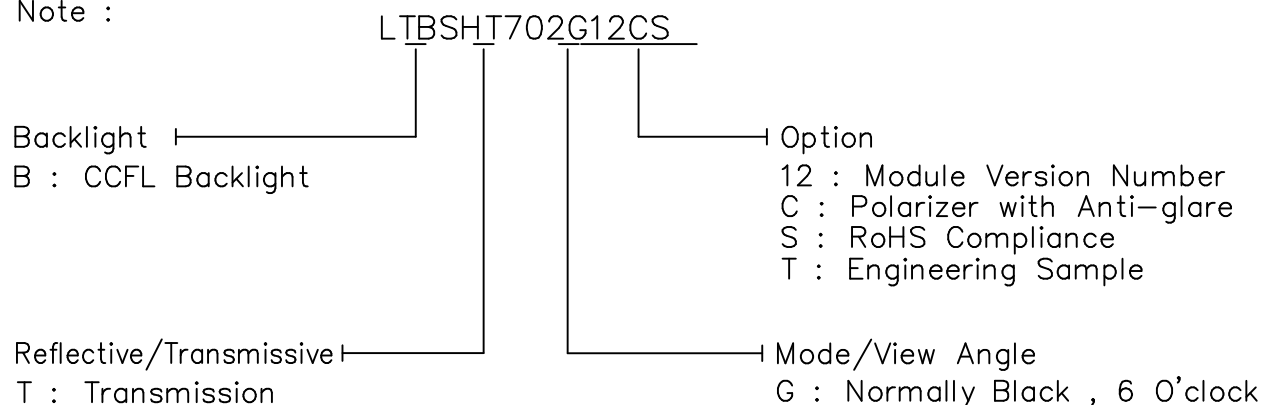

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

2.ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Power Supply for LCD Drive	V _{EE} -VSS	0	30.0	V	
Input Voltage	VI	-0.3	VDD	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 Ta ≤ 50°C : 80%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.

That phenomenon is reversible.

3.ELECTRICAL CHARACTERISTICS

3-1.ELECTRICAL CHARACTERISTICS OF LCM

ITEM	SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	-		2.7	3.0	3.3	V
				4.5	5.0	5.5	
Recommended LC Driving Voltage	V _{EE} -VSS	Duty=1/240	0°C	23.3	23.8	24.3	V
			25°C	22.3	22.8	23.3	
			50°C	21.0	21.5	22.0	
Input Voltage	V _{IH}	H level		0.8VDD	-	VDD	V
	V _{IL}	L level		0	-	0.2VDD	
Power Supply Current	I _{DD}	T _a =25℃ FLM = 70 Hz VSS = 0 V VDD = 5.0 V V _{EE} -VSS= 22.8 V PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		-	3.5	5	mA
	I _{EE}			-	20	30	
Surface Luminance of LCM	L	T _a =25℃ PATTERN: (Dots All ON)		60	75	-	cd/m ²
		T _a =25℃ PATTERN: (Dots All OFF)		-	10	-	

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used CCFL Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp voltage	V _L	—	386	—	Vrms	—
Lamp current	I _L	—	5	—	mA _{rms}	—
Lamp power consumption	P _L	—	1.9	—	W	(*1)
Starting voltage	V _S	—	—	630	Vrms	Ta=25°C
		—	—	820	Vrms	Ta=0°C
Lamp life time	L _L	20000	—	—	hrs	IL = 5 mA _{rms} (*2)

(*1) Power consumption excluded inverter loss .

(*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness .

(*3) a. Please follow the table of Lamp Characteristics shown above if not to use the inverter recommended by Nan Ya .

b. If customers want to design inverter by themselves , please inform Nan Ya to offer the detail lamp specification .

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM702-12D DATE : SEPT.19.2007 SHEET NO. : 5/23
---	---------------	--

3-3.ELECTRICAL CHARACTERISTICS OF TESTED INVERTER

TDK CXA-L10L

(If the inverter output "CN2" couldn't mating CCFL connector ,
please refer to specification "INTERNAL PIN CONNECTION" page
to fit it.

3-3-1 GENERAL SPECIFICATIONS

OPERATING TEMPERATURE : -10°C~60°C

STORAGE TEMPERATURE : -20°C~85°C

DIMENSION : 44.0(L)mm x 21.0(W)mm x MAX 18.0(H)mm

3-3-2 PIN ASSIGNMENTS

INPUT (CN1) CONNECTOR :

NO.	FUNCTION
1	VIN
2	GND

OUTPUT (CN2) CONNECTOR :

NO.	FUNCTION
3	OUT1
4	OUT2
5	OUT GND

3-3-3 RELATIONSHIP BETWEEN VIN & TUBE CURRENT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Input Voltage	VIN	-	(10)	-	V	
Tube Current	IL	-	5	-	mA	

REV/DATE	R0/ 09.19.2007					BY C.Y.CHAN
----------	-------------------	--	--	--	--	----------------

4.OPTICAL CHARACTERISTICS

ITEM MODE		Cr(Contrast Ratio)						θ (Viewing Angle)		ϕ (Viewing Angle)	
		0°C		25°C		50°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	G	5.0	7.0	7.0	10.0	2.5	3.5	—	F: 40 R: 30	—	L: 35 R: 35
NOTE		NOTE 3,6						NOTE 3,5			

NOTE :

T: Transmission


G: Normally Black , 6 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0℃	400	500	750	ms	NOTE 2,3
		25℃	200	250	380		
		50℃	120	150	230		
Response Time (fall)	Tf	0℃	280	350	530	ms	NOTE 2,3
		25℃	80	100	150		
		50℃	70	80	120		

(NOTE 1)

Definition of Operation Voltage(Vop)

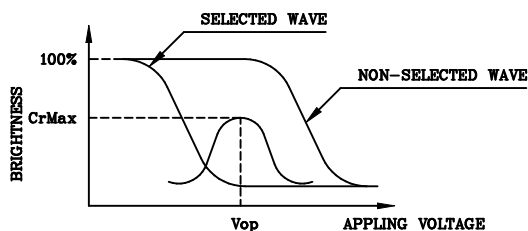

(positive type)

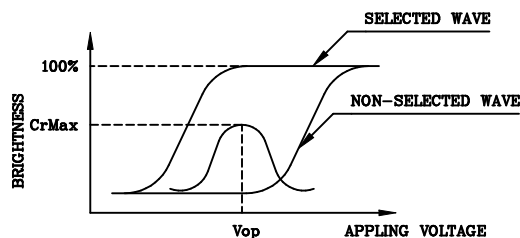

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

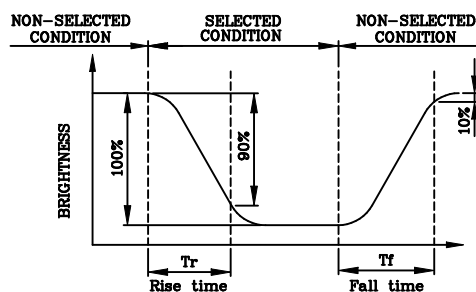

(positive type)

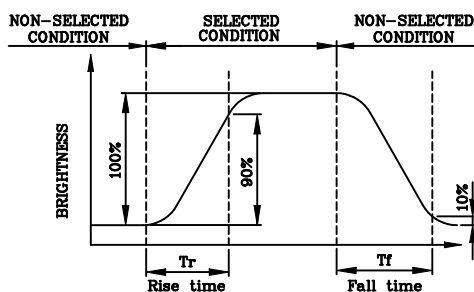

(negative type)

*Conditions

Operating Voltage : Vop



Viewing Angle (θ, ϕ) : (0,0)

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

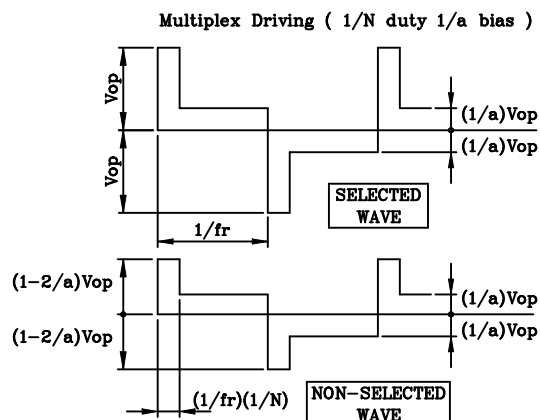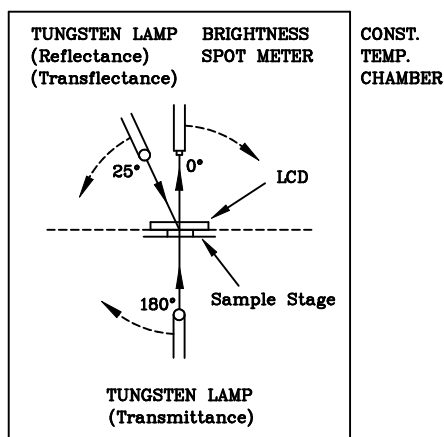



(NOTE 4)

Definition of Viewing Direction

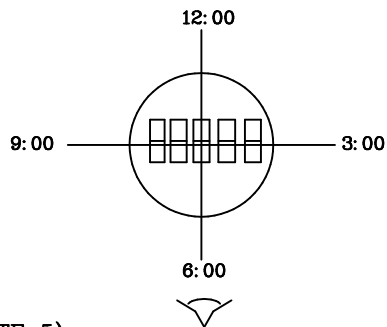

(NOTE 5)

Definition of Viewing Angle

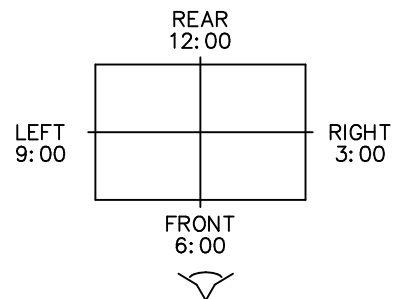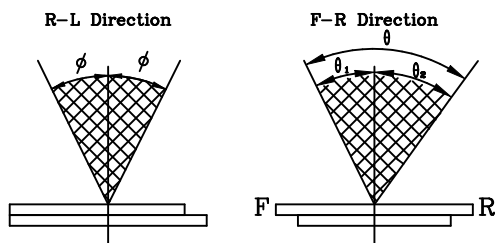


$$\theta = \theta_1 + \theta_2$$

***Conditions**


Operating Voltage : Vop
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

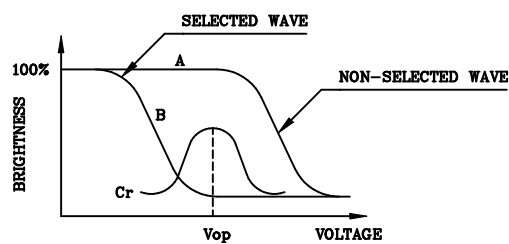

(positive type)

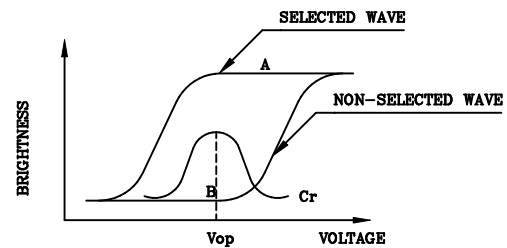


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

***Conditions**

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

5.BLOCK DIAGRAM

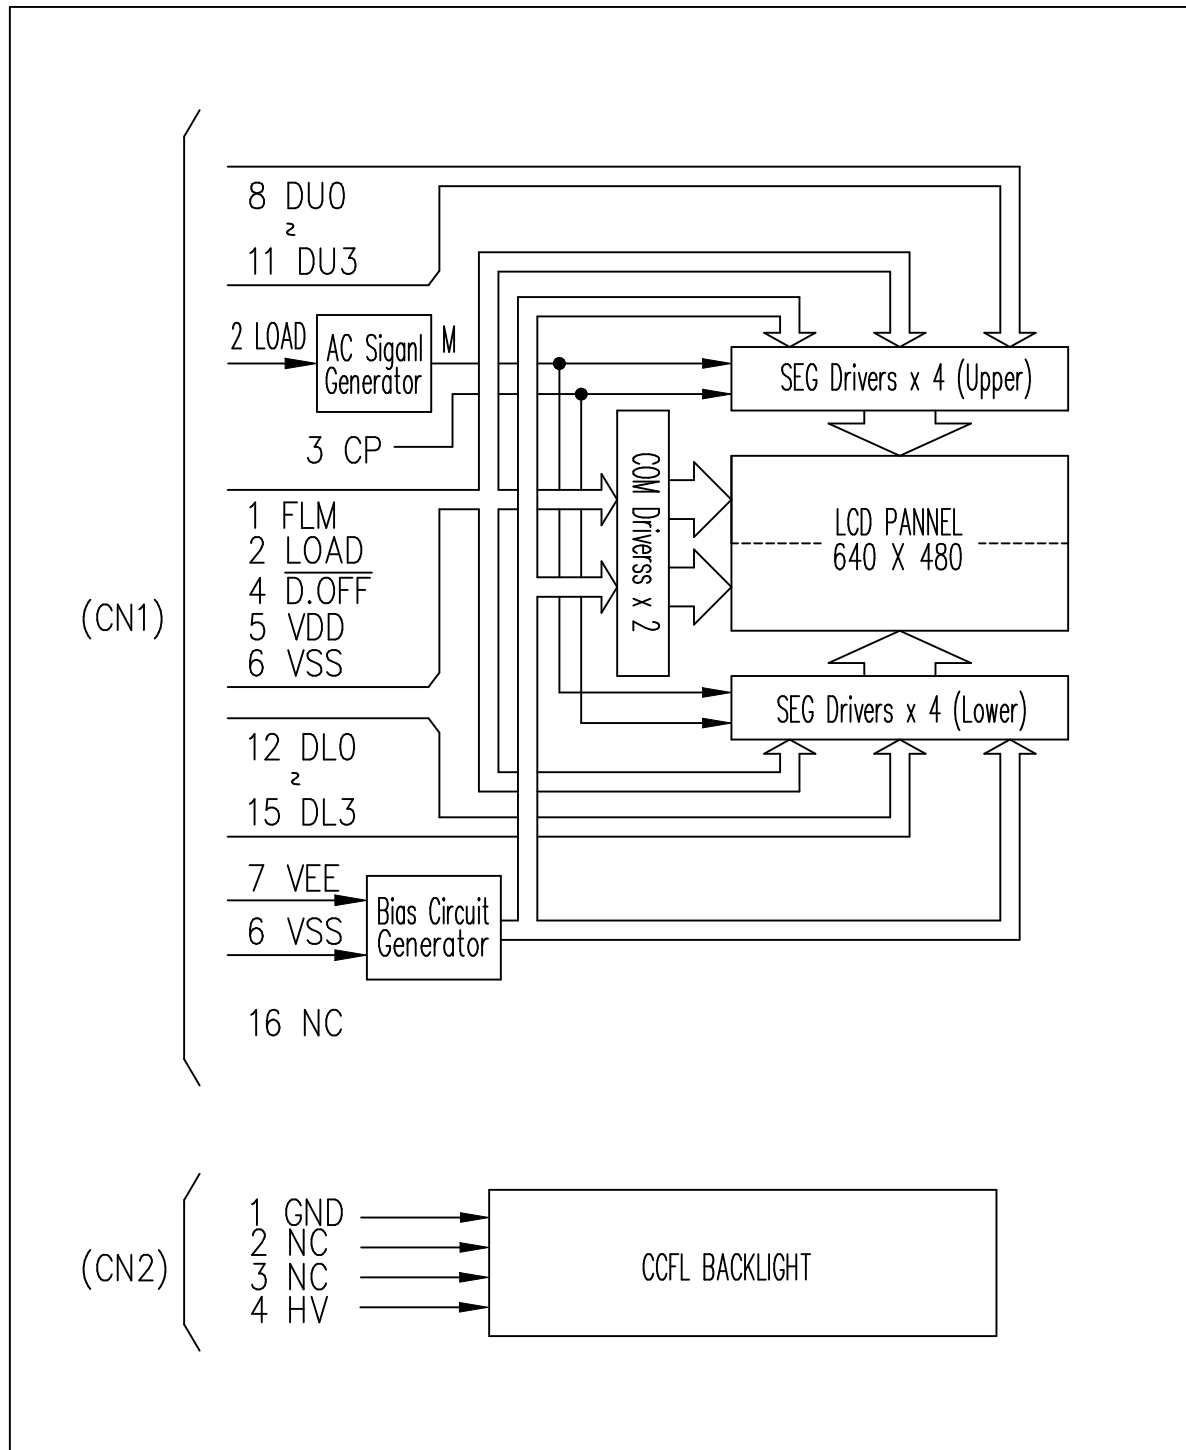

6. DEFINITION OF INTERFACE

CN1 : Interface Connector (15 Pins) : 53261-1571 (MOLEX)


Pin No.	Symbol	Level	Function
1	FLM	H/L	Scan Start-Up Signal
2	LOAD	H → L	Data Latch Pulse
3	CP	H → L	Data Shift Pulse
4	$\overline{\text{D.OFF}}$	H/L	Display Off ("H" = On , "L" = Off)
5	VDD	—	Power Supply for Logic (+5V)
6	VSS	—	Signal Ground (GND)
7	VEE	—	Power Supply for LCD (+)
8	DU0	H/L	Display Data (Upper Half)
9	DU1		
10	DU2		
11	DU3		
12	DL0	H/L	Display Data (Lower Half)
13	DL1		
14	DL2		
15	DL3		

CN2 : CCFL Connector : M63M83-04 (MITSUMI)

Pin No.	Symbol	Function
1	GND	Power Supply for CCFL (Gnd)
2	N.C.	Non Connection
3	N.C.	Non Connection
4	HOT	Power Supply for CCFL (Hot)

7. POWER SUPPLY

LCM

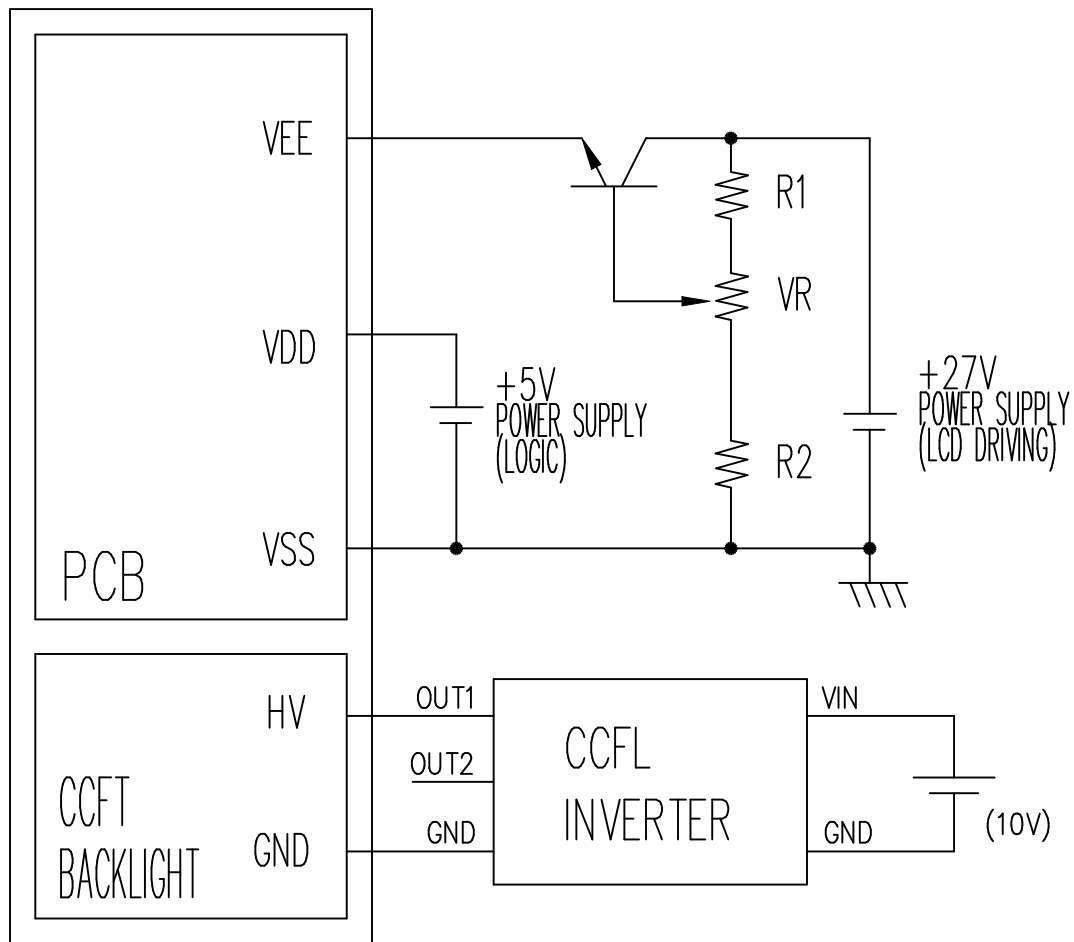


(NOTE)


- 1) $R1 + VR + R2 = 10K \sim 20K \Omega$
- 2) TESTED CCFT INVERTER : TDK CXA-L10L
- 3) Lamp current : 5mA(rms)

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION			SPEC. NO. : LM702-12D DATE : SEPT.19.2007 SHEET NO. : 12/23	
<div>8.TIMING CHARACTERISTICS</div> <div>** Please refer to the SPEC NT7701H (NOVATEK)</div>						
REV/DATE	RO/ 09.19.2007					BY C.Y.CHAN

8-2.DISPLAY PATTERN

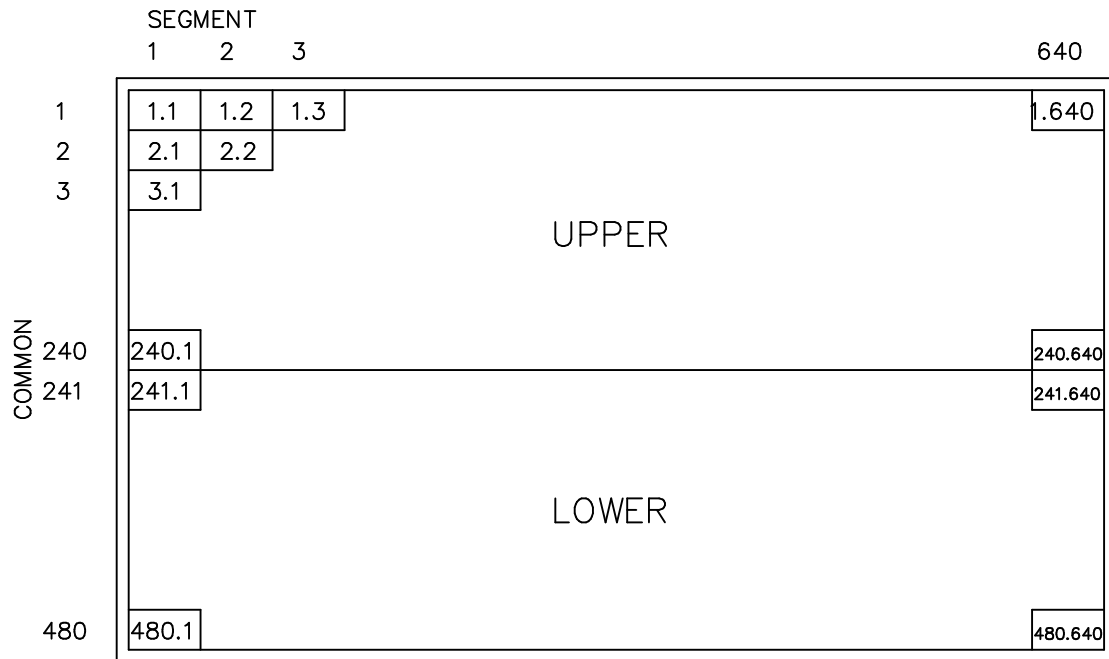

NOTE : 1.1 MEANS 1ST COMMON 1ST SEGMENT DOT

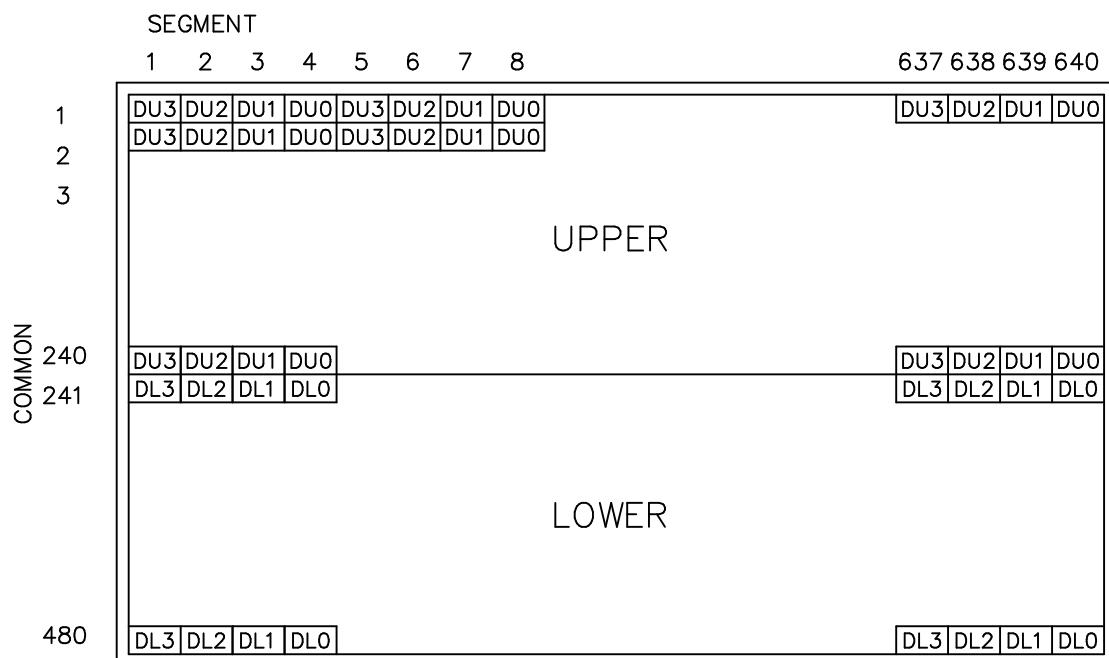

9. RELIABILITY TEST

NORMAL TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-20°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	50°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	50°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	0°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C, 30min → 70°C, 30min ↑ (1cycle)			Appearance without defect	10 cycles


NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM702-12D DATE : SEPT.19.2007 SHEET NO. : 16/23
---	---------------	---

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions

*Viewing Area Definition

Fig. 1

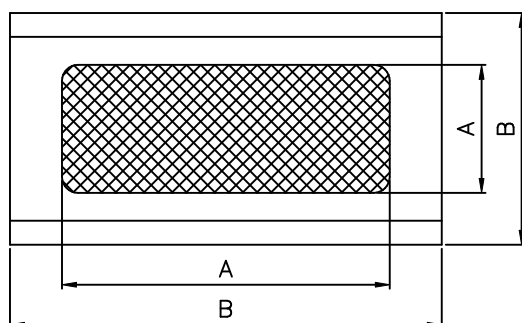

A : Zone Viewing Area
B : Zone Glass Plate Outline

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and sample to be 30cm to 50cm.

REV/DATE	R0/ 09.19.2007					BY C.Y.CHAN
----------	-------------------	--	--	--	--	----------------













NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION			SPEC. NO. : LM702-12D DATE : SEPT.19.2007 SHEET NO. : 17/23																																		
<p>*Test and measurement are performed under the following conditions, unless otherwise specified.</p> <table> <tr> <td>Temperature</td> <td>20± 15℃</td> </tr> <tr> <td>Humidity</td> <td>65± 20%R.H.</td> </tr> <tr> <td>Pressure</td> <td>860~1060hPa(mmbar)</td> </tr> </table> <p>In case of doubtful judgment, it is performed under the following conditions.</p> <table> <tr> <td>Temperature</td> <td>20± 2℃</td> </tr> <tr> <td>Humidity</td> <td>65± 5%R.H.</td> </tr> <tr> <td>Pressure</td> <td>860~1060hPa(mmbar)</td> </tr> </table> <p>5.Specification for quality check 5-1 Electrical characteristics</p> <table border="1"> <thead> <tr> <th>NO.</th> <th>Item</th> <th>Criterion</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Non operational</td> <td>Fail</td> </tr> <tr> <td>2</td> <td>Miss operating</td> <td>Fail</td> </tr> <tr> <td>3</td> <td>Missing dot</td> <td>Fail</td> </tr> <tr> <td>4</td> <td>Contrast irregular</td> <td>Fail</td> </tr> <tr> <td>5</td> <td>Response time</td> <td>Within Specified value</td> </tr> <tr> <td>6</td> <td>Backlight turn on/off</td> <td>Within Specified value</td> </tr> </tbody> </table>							Temperature	20± 15℃	Humidity	65± 20%R.H.	Pressure	860~1060hPa(mmbar)	Temperature	20± 2℃	Humidity	65± 5%R.H.	Pressure	860~1060hPa(mmbar)	NO.	Item	Criterion	1	Non operational	Fail	2	Miss operating	Fail	3	Missing dot	Fail	4	Contrast irregular	Fail	5	Response time	Within Specified value	6	Backlight turn on/off	Within Specified value
Temperature	20± 15℃																																						
Humidity	65± 20%R.H.																																						
Pressure	860~1060hPa(mmbar)																																						
Temperature	20± 2℃																																						
Humidity	65± 5%R.H.																																						
Pressure	860~1060hPa(mmbar)																																						
NO.	Item	Criterion																																					
1	Non operational	Fail																																					
2	Miss operating	Fail																																					
3	Missing dot	Fail																																					
4	Contrast irregular	Fail																																					
5	Response time	Within Specified value																																					
6	Backlight turn on/off	Within Specified value																																					
REV/DATE	R0/ 09.19.2007					BY C.Y.CHAN																																	

5-2 External Appearance Defect

NO.	Item	Criterion																		
1	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<div>(1)–1–Spots</div> <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>D≤0.1</td><td>Ignore</td></tr><tr><td>0.1<D≤0.2</td><td>5</td></tr><tr><td>0.2<D≤0.3</td><td>2</td></tr><tr><td>0.3<D</td><td>0</td></tr></table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <div>(1)–2–Blurred Spots(At lighting condition)</div> <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>D≤0.3</td><td>Ignore</td></tr><tr><td>0.3<D≤0.75</td><td>5</td></tr><tr><td>0.75<D</td><td>0</td></tr></table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	D≤0.1	Ignore	0.1<D≤0.2	5	0.2<D≤0.3	2	0.3<D	0	Average Diameter(mm):D	Number of pieces permitted	D≤0.3	Ignore	0.3<D≤0.75	5	0.75<D	0
Average Diameter(mm):D	Number of pieces permitted																			
D≤0.1	Ignore																			
0.1<D≤0.2	5																			
0.2<D≤0.3	2																			
0.3<D	0																			
Average Diameter(mm):D	Number of pieces permitted																			
D≤0.3	Ignore																			
0.3<D≤0.75	5																			
0.75<D	0																			




SPECIFICATION

1	Line	<p>(1)-1 Lines</p> <table> <tr> <th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 4$</td><td>2</td></tr> <tr> <td>$0.08 < W \leq 0.1$</td><td>$L \leq 1$</td><td>1</td></tr> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurred Lines(At lighting condition)</p> <table> <tr> <th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 3$</td><td>6</td></tr> <tr> <td>$0.08 < W$</td><td>$3 < L$</td><td>None</td></tr> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3	Color irregular	Not remarkable color irregular.																								

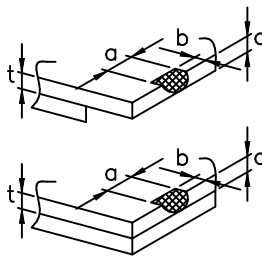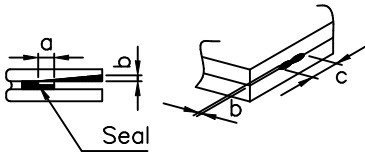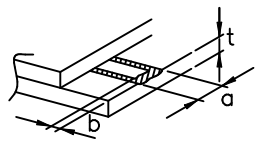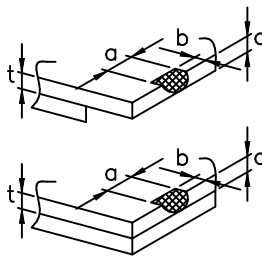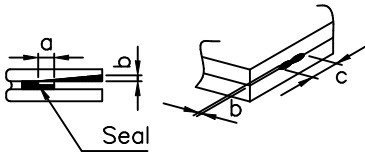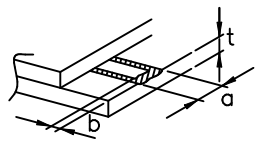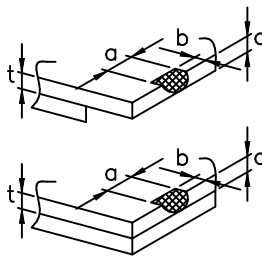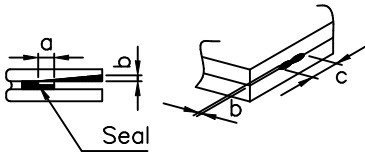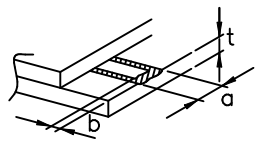4	Air bubbles polarizing plates, and reflection plates	<table><tr><td>Average Diameter (mm): D</td><td>Number of pieces permitted</td><td rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td></tr><tr><td>$D \leq 0.3$ $0.3 < D$</td><td>Ignore 0</td></tr></table> <p>Note that when there are 4 pieces or more, they are not to be concentrated.</p>	Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	$D \leq 0.3$ $0.3 < D$	Ignore 0										
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2															
$D \leq 0.3$ $0.3 < D$	Ignore 0																
5	Cracks	<table><tr><td>(1)General crack</td><td></td><td>$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.</td></tr><tr><td>(2)Corner crack</td><td></td><td>$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$</td></tr><tr><td>(3)Seal portion crack</td><td></td><td>$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.</td></tr><tr><td>(4)ITO Pin crack</td><td></td><td>$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$</td></tr><tr><td>(5)Progressive cracks</td><td colspan="2">All taken to be unacceptable.</td></tr></table>	(1)General crack		$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.	(2)Corner crack		$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$	(3)Seal portion crack		$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.	(4)ITO Pin crack		$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$	(5)Progressive cracks	All taken to be unacceptable.	
(1)General crack		$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.															
(2)Corner crack		$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$															
(3)Seal portion crack		$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.															
(4)ITO Pin crack		$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$															
(5)Progressive cracks	All taken to be unacceptable.																

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION		SPEC. NO. : LM702-12D DATE : SEPT.19.2007 SHEET NO. : 21 /23	
6	Outer dimensions	Should be within the tolerance.			
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.			
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.			


5-3 Dot Appearance Defect

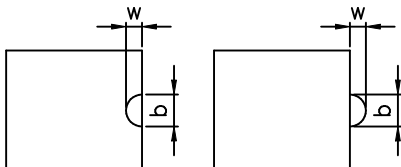NO.	Item	Criteria
1	Pinhole	<div></div> <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2	Missing	<div></div> <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.</p>
3	Thick and thin display	<div></div> <p>Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).</p>

REV/DATE	R0/ 09.19.2007					BY C.Y.CHAN
----------	-------------------	--	--	--	--	----------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION			SPEC. NO. : LM702-12D DATE : SEPT.19.2007 SHEET NO. : 22/23	
<p>NOTICE:</p> <ul style="list-style-type: none">• SAFETY<ol style="list-style-type: none">1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.• HANDLING<ol style="list-style-type: none">1.Avoid static electricity which can damage the CMOS LSI.2.Do not remove the panel or frame from the module.3.The polarizing plate of the display is very fragile. So, please handle it very carefully.4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.5.Do not use ketonics solvent & Aromatic solvent. Use a soft cloth soaked with a cleaning naphtha solvent.• STORAGE<ol style="list-style-type: none">1.Store the panel or module in a dark place where the temperature is 25°C±5°C and the humidity is below 65% RH.2.Do not place the module near organics solvents or corrosive gases.3.Do not crush, shake, or jolt the module.• TERMS OF WARRANT<ol style="list-style-type: none">1.Acceptance inspection period The period is within one month after the arrival of contracted commodity at the buyer's factory site.2.Applicable warrant period The period is within twelve months since the date of shipping out under normal using and storage conditions.						
REV/DATE	R0/ 09.19.2007					BY C.Y.CHAN

260.0±0.5



(3:00)

- 2.1±0.1 <Hole>



DWG NO.	[M71012D12A]	(1) A
DATE		2011

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

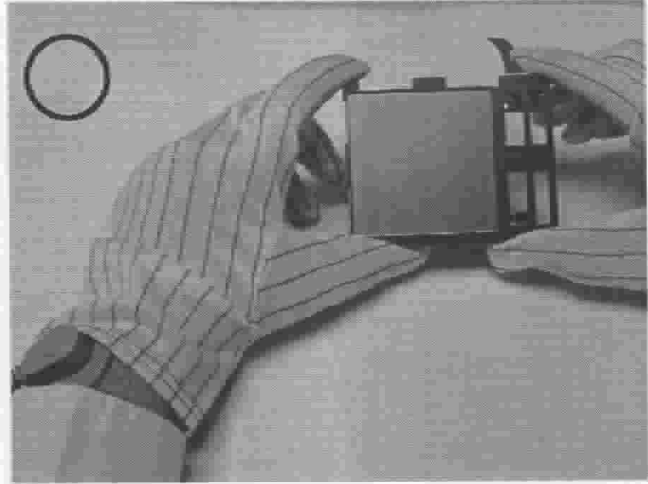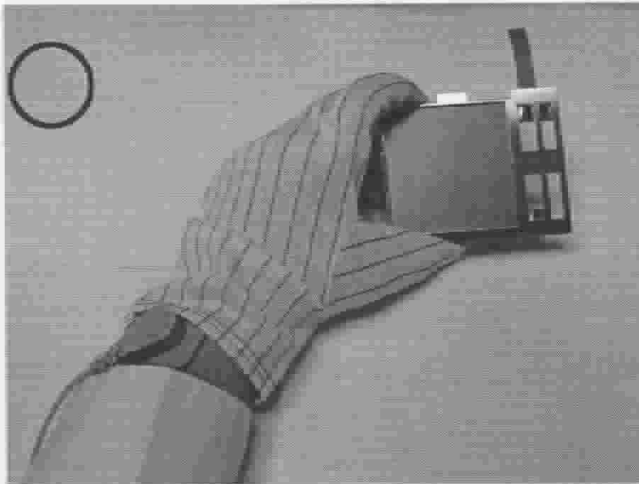


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

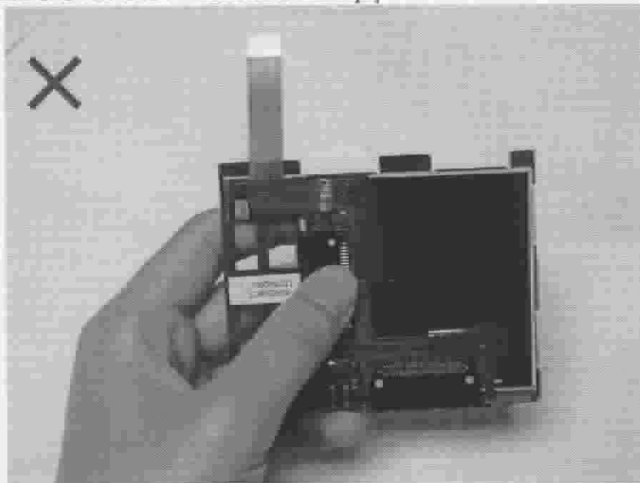


Please don't touch IC directly.

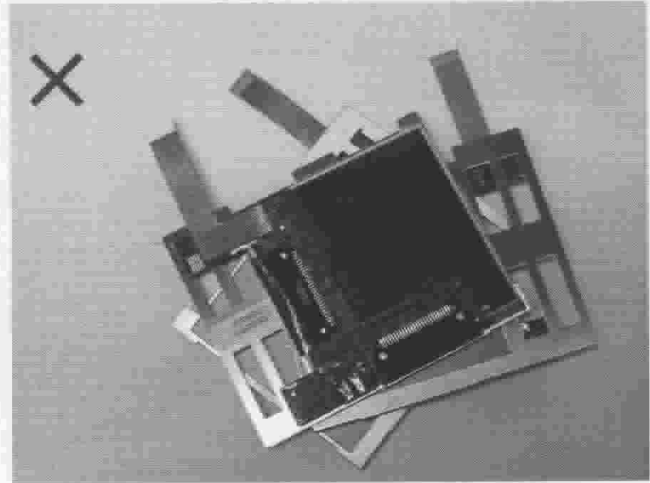

Please don't put one on another LCM.

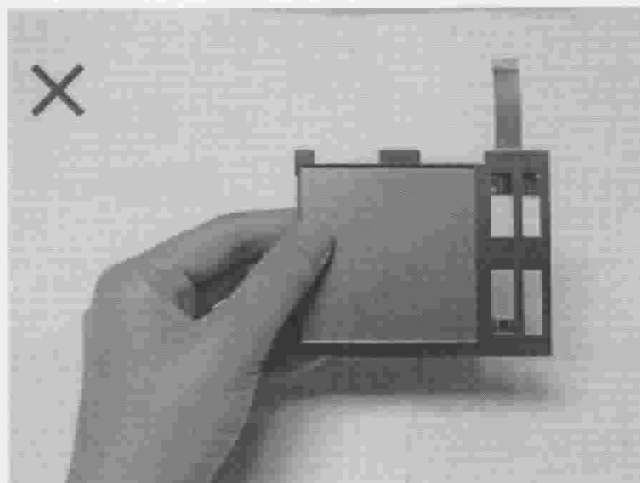

Please don't hold the surface of LCM.

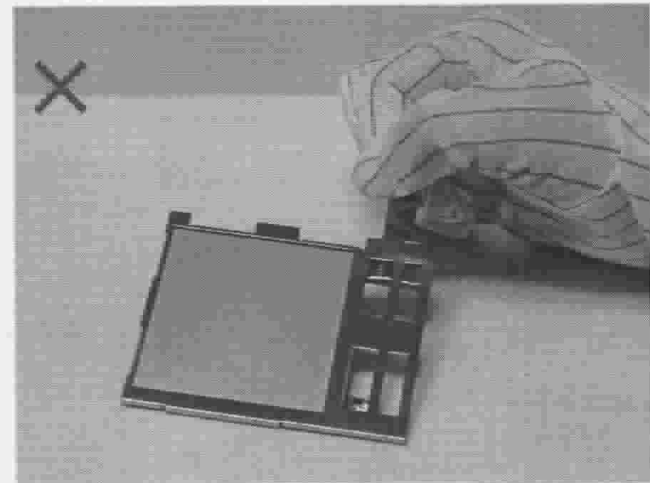



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

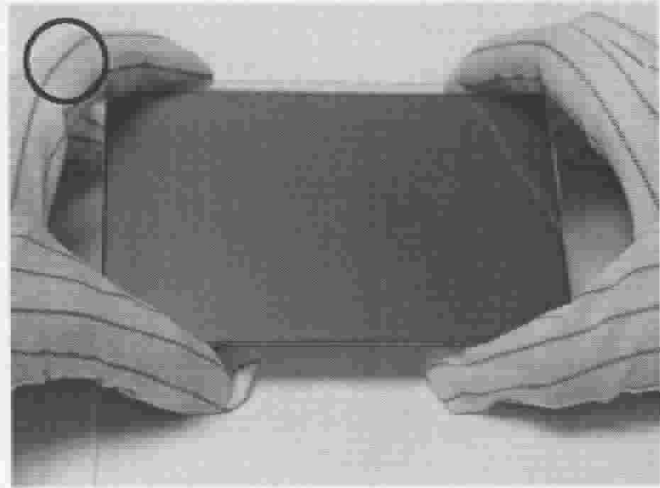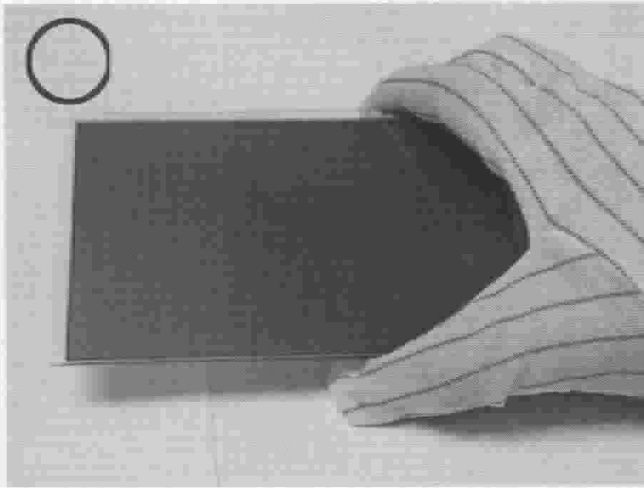


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

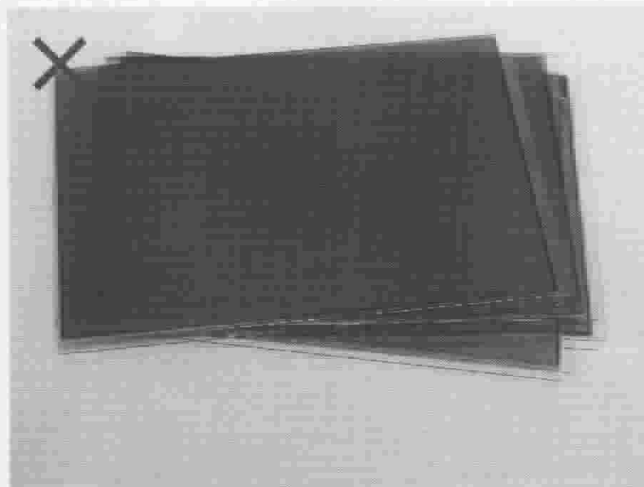


Please don't put one on another LCD.

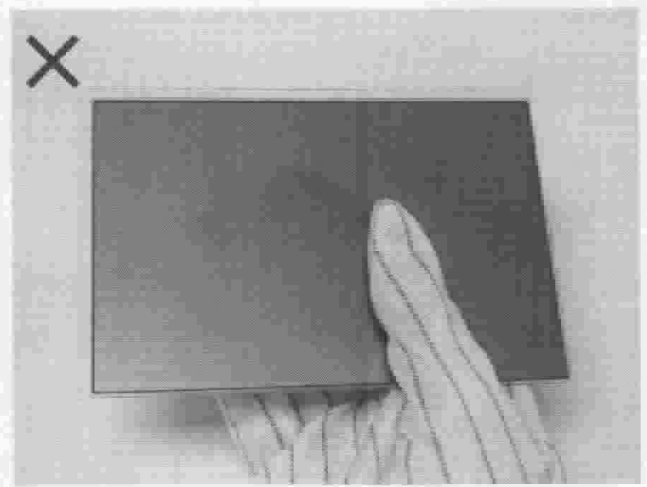

Please don't hold the surface of LCD.

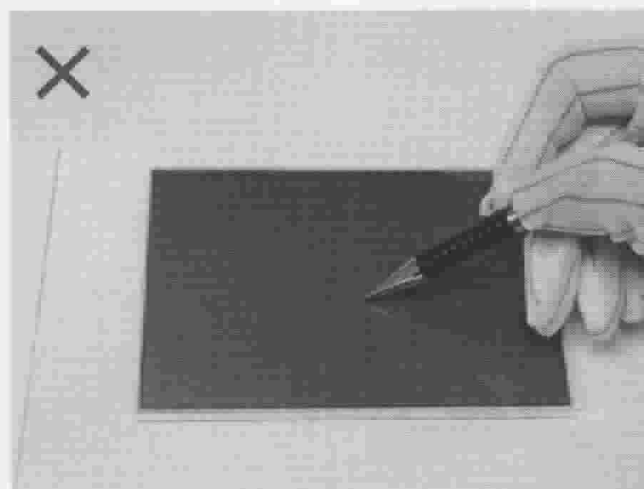

Please don't operate with sharp stick such as sharp pencil.

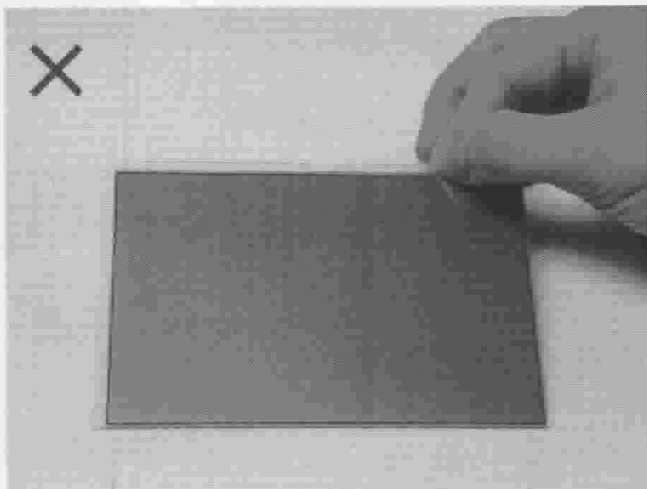

Please don't touch ITO glass without anti-static gloves.

