



深圳锐朗光电有限公司

SAMSUNG

LTN154U2-L05

TEL: 0755-29555810 0755-36926300

FAX: 0755-29555810

E-mail: fpd31@163.com zhoufeng.419@163.com

Website: <http://www.rlofpd.com>

ADD: 深圳市龙华街道梅龙路梅龙苑1单元1201



SAMSUNG

ELECTRONICS

Approval



TO : Lenovo / Quanta

DATE : May.4, 2007

SAMSUNG TFT-LCD

MODEL NO. : LTN154U2-L05

NOTE : Extension code [-1] → LTN154U2-L05- 1
Surface type [**ARC150T**]
Green product (Complied with RoHS requirement)

Any Modification of Spec is not allowed without SEC' permission

W. B . Youn

APPROVED BY :

PREPARED BY : LCD Development Team3

SAMSUNG ELECTRONICS CO., LTD.



Samsung Secret

Doc.No.	LTN154U2-L05	Rev.No	04-A03-S-070504	Page	1 / 29
----------------	--------------	---------------	-----------------	-------------	--------

CONTENTS

Revision History	----- (3)
General Description	----- (4)
1. Absolute Maximum Ratings	----- (5)
1.1 Absolute Ratings of environment	
1.2 Electrical Absolute Ratings	
2. Optical Characteristics	----- (7)
3. Electrical Characteristics	----- (10)
3.1 TFT LCD Module	
3.2 Backlight Unit	
4. Block Diagram	----- (13)
4.1 TFT LCD Module	
4.2 Backlight Unit	
5. Input Terminal Pin Assignment	----- (14)
5.1 Input Signal & Power	
5.2 LVDS Interface	
5.3 Backlight Unit	
5.4 Timing Diagrams of LVDS For Transmitting	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color.	
5.6 Pixel format	
6. Interface Timing	----- (20)
6.1 Timing Parameters	
6.2 Timing Diagrams of interface Signal	
6.3 Power ON/OFF Sequence	
7. Mechanical outline dimension	----- (22)
8. Packing	----- (24)
9. Marking & others	----- (25)
10. General Precaution	----- (27)
11. EDID	----- (29)

Samsung Secret

REVISION HISTORY

Approval

Date	Revision No.	Page	Summary
Dec. 22, 2005	P00	ALL	The specification of LTN154U2-L054 model was first issued. . Lenovo label information P/N 13N7177 FRU 13N7178 H/C 1ZBT1
Apr. 19, 2006	A00	ALL	The specification of LTN154U2-L05 model was approved
May, 11, 2006	A01	12	The leakage current specification was added $I_{leak} = 2.0\text{mA}$ (Max)
Mar.02.2007	A02	22 23 24	Outline dimension was changed to remove Cushion on BLU Revision code was changed 0 -> 1 . Lenovo label information P/N 42T0407 FRU 42T0408 H/C 1ZDCA
May.04.2007	A03	10 23 27	WWAN improvement was applied Main frequency was changed . 80.8MHz → 83.76MHz (@60Hz) Outline dimension was changed to include shielding and right ground path The EDID data was changed . Checksum : D2 → 21

Samsung Secret

GENERAL DESCRIPTION

DESCRIPTION

LTN154U2-L05 is a color active matrix TFT (Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching devices. This model is composed of a TFT LCD panel, a driver circuit and a backlight system. The resolution of a 15.4" contains 1,920 x 1200 pixels and can display up to 262,144 colors. 6 O'clock direction is the optimum viewing angle.

FEATURES

- Thin and light weight
- High contrast ratio, high aperture structure
- Super wide Viewing Angle
- Fast Response Time
- Wide UXGA(1920 X 1200) resolution
- Low power consumption
- DE (Data enable) only mode.
- 3.3V LVDS Interface
- On board EDID chip
- Auto Recovery Function
- Green product (Complied with RoHS requirement)

APPLICATIONS

- Notebook PC
- If the usage of this product is not for PC application, but for others, please contact SEC

GENERAL INFORMATION

Item	Specification	Unit	Note
Display area	331.2(H) X 207.0(V) (15.4"diagonal)	mm	
Driver element	a-si TFT active matrix		
Display colors	262,144		
Number of pixel	1920 x 1200(16 : 10)	pixel	
Pixel arrangement	RGB vertical stripe		
Pixel pitch	0.1725(H) x 0.1725(V)	mm	
Display Mode	Normally white		
Surface treatment	Haze 40, Hard-Coating 2H, ARC150T		

Samsung Secret

Mechanical Information

Item		Min.	Typ.	Max.	Unit	Note
Module size	Horizontal (H)	343.5	344.0	344.5	mm	
	Vertical (V)	221.5	222.0	222.5	mm	
	Depth (D)	-	-	6.5	mm	(1)
Weight		-	550	565	g	

Note (1) Measurement condition of outline dimension

- . Equipment : Vernier Calipers
- . Push Force : 500g · f (minimum)

1. ABSOLUTE MAXIMUM RATINGS

1.1 ENVIRONMENTAL ABSOLUTE RATINGS


Item	Symbol	Min.	Max.	Unit	Note
Storage temperate	T_{STG}	-20	60	°C	(1)
Operating temperate (Temperature of glass surface)	T_{OPR}	0	50	°C	(1)
Shock (non-operating)	Snop	-	210	G	(2),(5)
			50		(3),(5)
Vibration (non-operating)	Vnop	-	2.41	G	(4),(5)

Note (1) Temperature and relative humidity range are shown in the figure below.

95 % RH Max. ($40^{\circ}\text{C} \geq T_a$)

Maximum wet - bulb temperature at 39°C or less. ($T_a > 40^{\circ}\text{C}$) No condensation.

- (2) 3ms, half sine wave, one time for $\pm X, \pm Y, \pm Z$.
- (3) 18ms, Trapezoidal wave, one time for $\pm X, \pm Y, \pm Z$.
- (4) 5~500 Hz, Random vibration, 30 min for X,Y,Z.
- (5) At testing Vibration and Shock, the fixture in holding the Module to be tested have to be hard and rigid enough so that the Module would not be twisted or bent by the fixture.

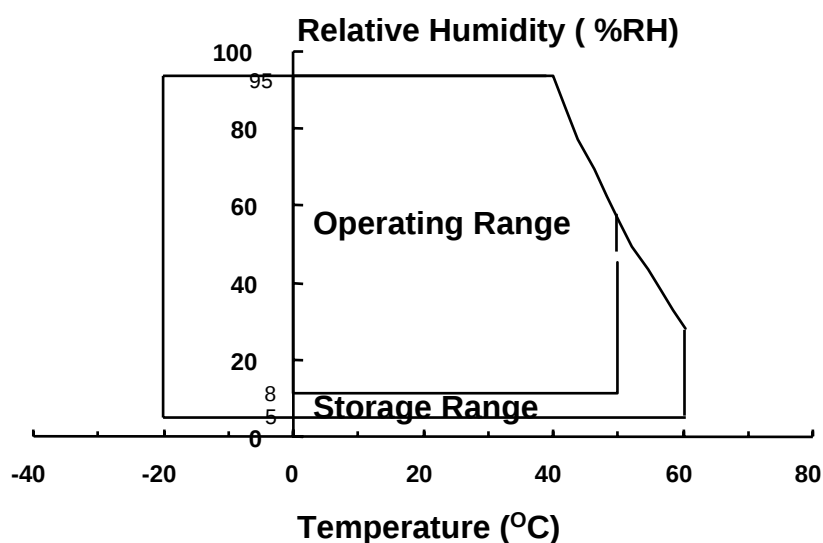

Samsung Secret

1.2 ELECTRICAL ABSOLUTE RATINGS

(1) TFT LCD MODULE

 $V_{DD} = 3.3V$, $V_{SS} = GND = 0V$

ITEM	SYMBOL	MIN.	MAX.	UNIT	NOTE
Power Supply Voltage	V_{DD}	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)
Logic Input Voltage	V_{IN}	$V_{DD} - 0.3$	$V_{DD} + 0.3$	V	(1)

Note 1) Within $T_a = (25 \pm 2 \text{ }^{\circ}\text{C})$

(2) BACK-LIGHT UNIT

 $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$

ITEM	SYMBOL	MIN.	MAX.	UNIT	NOTE
Lamp Current	I_L	2.0	7.0	mA _{rms}	(1)
Lamp frequency	F_L	40	80	kHz	(1)

Note 1) Permanent damage to the device may occur if maximum values are exceeded
Functional operation should be restricted to the conditions described under normal operating condition

Samsung Secret

2. OPTICAL CHARACTERISTICS


The following items are measured under stable conditions. The optical characteristics should be measured in a dark room or equivalent state with the methods shown in Note (5).
Measuring equipment : TOPCON SR-3

* Ta = 25 ± 2 °C, V_{DD}=3.3V, f_V= 60Hz, f_{DCLK}=81MHz, (I_L= 6.0 mA)

Item		Symbol	Condition	Min.	Typ.	Max	Unit	Note
Contrast Ratio (5 Points)		CR	$\phi = 0,$ $\theta = 0$	300	500	-	-	(1), (2), (5)
Response Time at Ta	Rising	T _R + T _F			60	-	msec	(1), (3)
Average Luminance of White (5 Points)		Y _{L,AVE}		160	180	-	cd/m ²	I _L =6.0mA (1), (4)
Color Chromaticity CIE)	Red	R _X		0.565	0.595	0.625	-	(1), (5) SR-3
		R _Y		0.317	0.347	0.377		
	Green	G _X		0.289	0.319	0.349		
		G _Y		0.516	0.546	0.576		
	Blue	B _X		0.122	0.152	0.182		
		B _Y		0.106	0.136	0.166		
	White	W _X		0.285	0.313	0.341		
		W _Y		0.309	0.329	0.349		
Viewing Angle	Hor.	θ _L	CR ≥ 10	60	65		Degrees	(1), (5) SR-3
		θ _H		60	65			
	Ver.	φ _H		45	50			
		φ _L		45	50			
5 Points White Variation		δ		80	-	-	%	(6)
13 Points White Variation		δ _L		50	-	-	%	

Samsung Secret

Note 1) Definition of Viewing Angle : Viewing angle range($10 \leq C/R$)

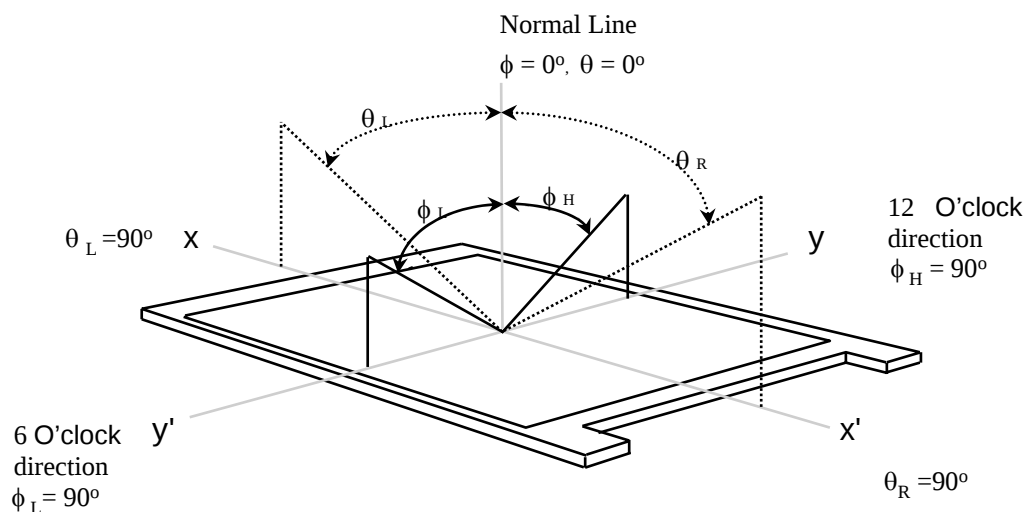


Note 2) Definition of Contrast Ratio (CR) : Ratio of gray max (Gmax) ,gray min (Gmin) at 5 points(4, 5, 7, 9, 10)


$$CR = \frac{CR(4) + CR(5) + CR(7) + CR(9) + CR(10)}{5}$$

Points : (4) , (5) , (7) , (9) , (10) at the figure of Note (6).

Note 3) Definition of Response time :

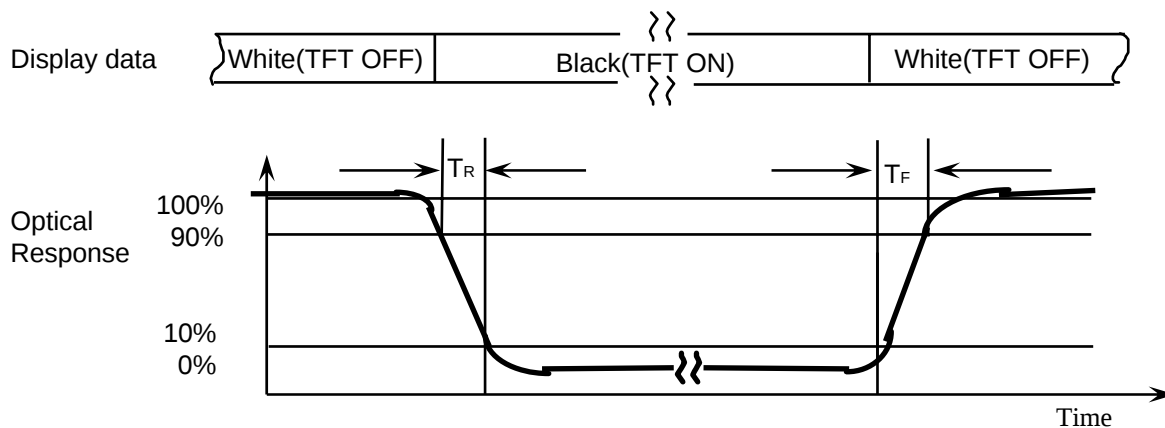


Note 4) Definition of Average Luminance of White : measure the luminance of white at 5 points.

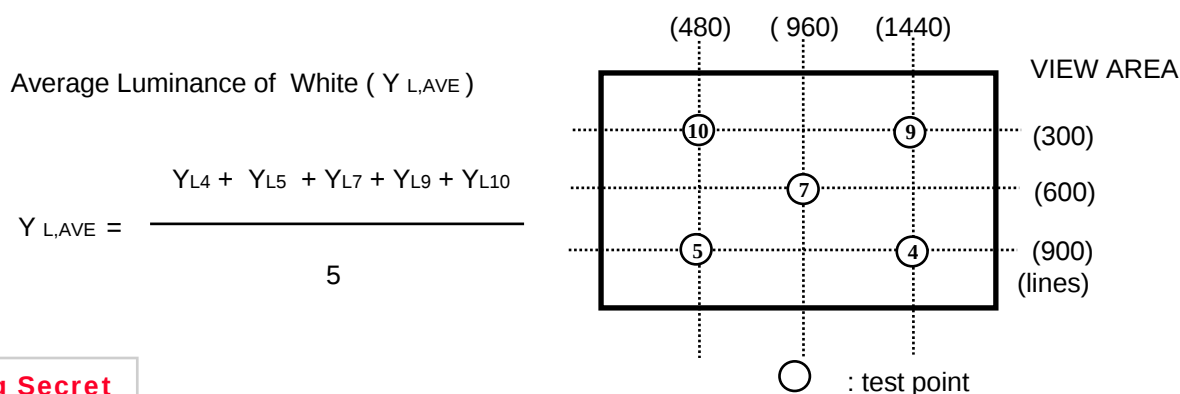

Samsung Secret


Note 5) After stabilizing and leaving the panel alone at a given temperature for 30 min , the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. 30 min after lighting the backlight. This should be measured in the center of screen.
 Lamp current : 6.0mA (Inverter : SIC-130T)
 Environment condition : $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$

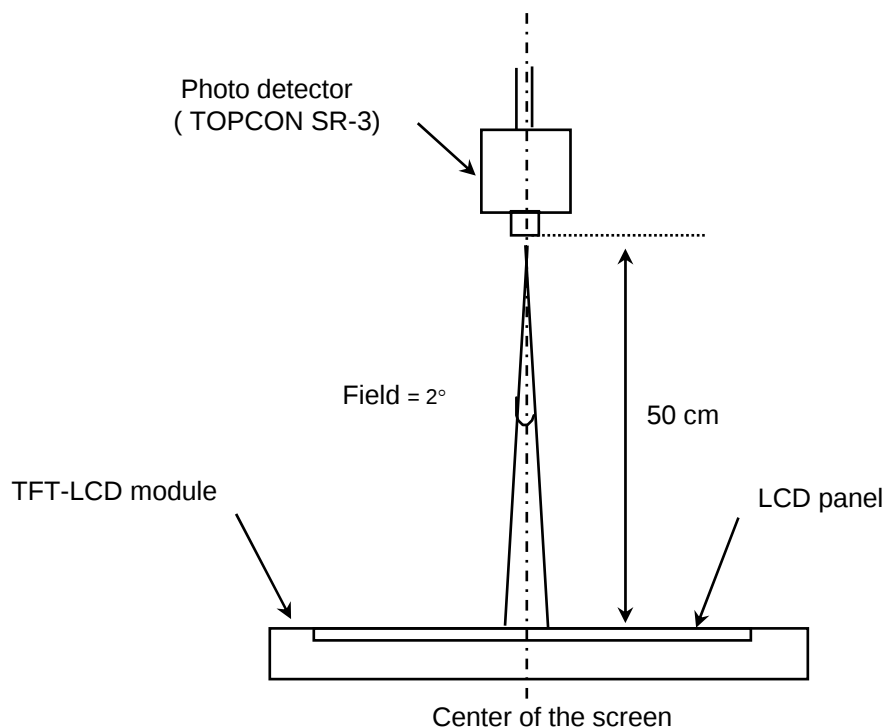

Optical characteristics measurement setup

Note 6) Definition of 13 points white variation (δL), CR variation (C_{VER}) [① ~ ⑬]

$$\delta L = \frac{\text{Maximum luminance of 13 points}}{\text{Minimum luminance of 13 points}}$$

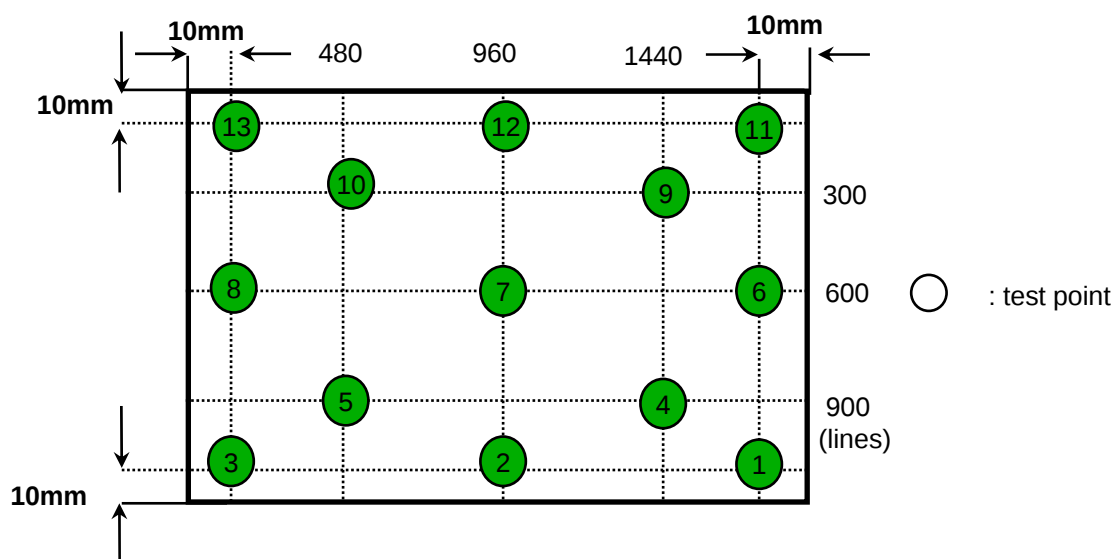

Samsung Secret

3. ELECTRICAL CHARACTERISTICS

3.1 TFT LCD MODULE

Ta=25 ± 2 °C


ITEM			SYMBOL	MIN	TYP	MAX	UNIT	NOTE
Voltage of Power Supply			V _{DD}	3.0	3.3	3.6	V	
Differential Input Voltage for LVDS Receiver Threshold		High	V _{IH}	-	-	+100	mV	V _{CM} =+1.2V
		Low	V _{IL}	-100	-	-	mV	
Vsync F r e q u e n c y	60Hz	Hsync Freq	F _H	72.24	72.96	84.0	KHz	
		Main Freq	F _{DCLK}	74.41	83.76	98.28	MHz	
	50Hz	Hsync Freq	F _H	60.2	60	70	KHz	
		Main Freq	F _{DCLK}	62.0	67.14	81.9	MHz	
	40Hz	Hsync Freq	F _H	48.16	48.8	56.0	KHz	
		Main Freq	F _{DCLK}	49.6	53.9	65.5	MHz	
Rush Current			I _{RUSH}	-	-	1.5	A	(4)
Current of Power Supply		White	I _{DD}	-	510	-	mA	(2),(3)*a
		Mosaic		-	580	-	mA	(2),(3)*b
		WinXP Pattern		-	600	-	mA	(2),(3)
		Max Pattern		-	760	800	mA	(2),(3)*c

Note (1) Display data pins and timing signal pins should be connected.(GND=0V)


(2) f_v=60Hz, f_{DCLK} =80.8MHZ, V_{dd} = 3.3V , DC Current.

(3) Power dissipation pattern

*a) White Pattern

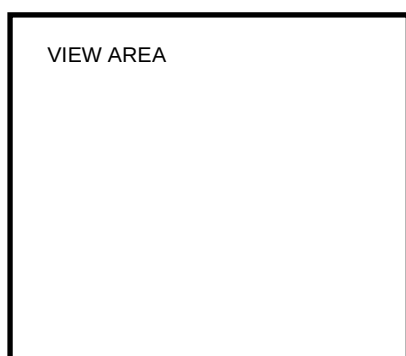


*b) Mosaic Pattern

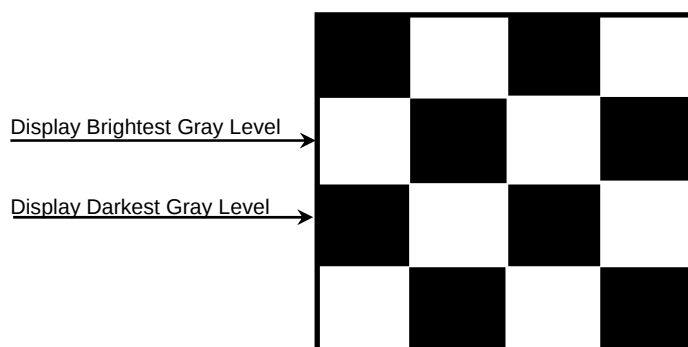


Samsung Secret


*c) Maximum Power pattern : 1dot inversion

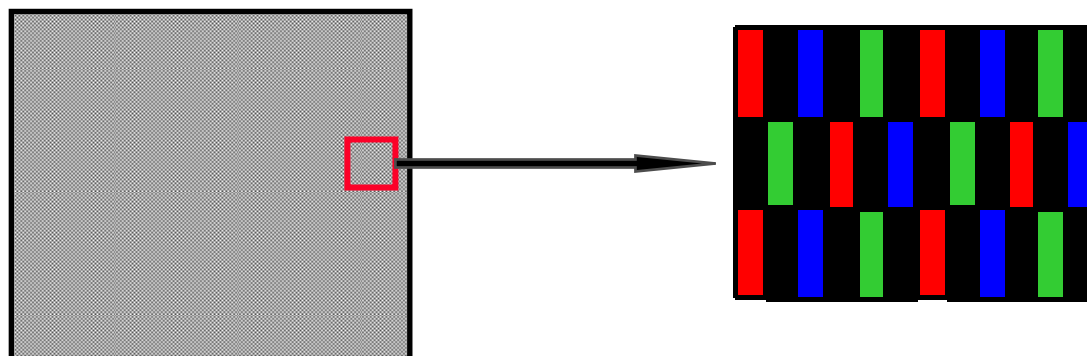

4) Rush current measurement condition

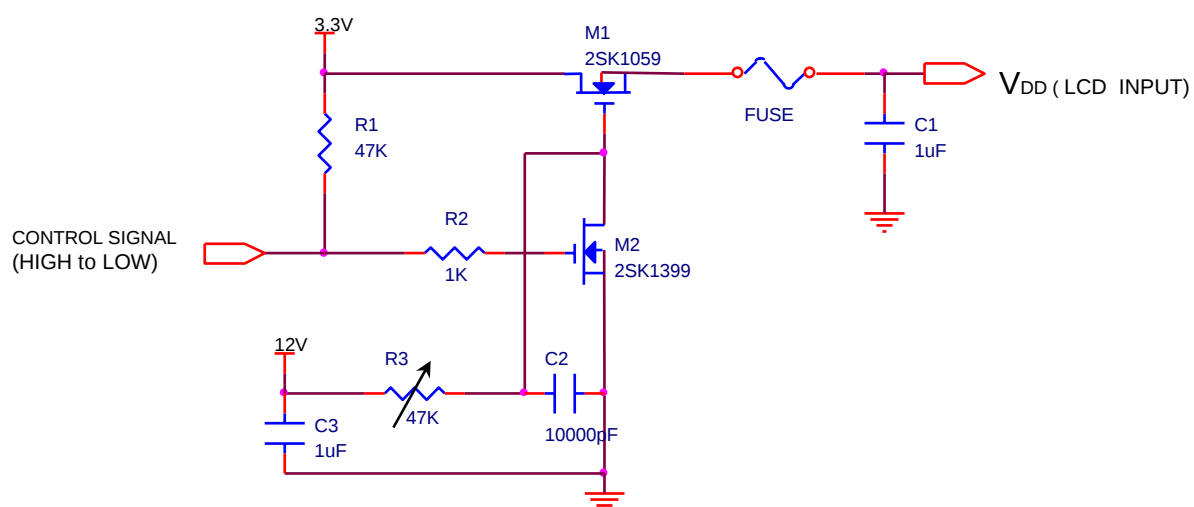

V_{DD} rising time is 470us

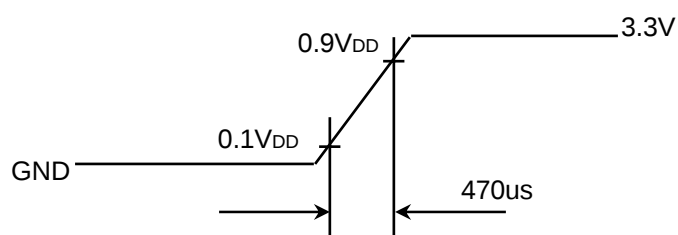

Samsung Secret

3.2 BACK-LIGHT UNIT

The backlight system is an edge-lighting type with a single CCFT (Cold Cathode Fluorescent Tube).
The characteristics of a single lamp are shown in the following table.

$T_a = 25 \pm 2 \text{ } ^\circ\text{C}$

- INVERTER : SEM SIC 130T, CCFL P/N: SS20D3370E4575C2782650S, Sanken Electric


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Lamp Current	I _L	3.0 (Duty 15%)	6.0	6.5	mArms	(1), (6)
Lamp Voltage	V _L	-	700	-	Vrms	I _L =6.0mA
Frequency	f _L	50	60	70	KHz	(2)
Power Consumption	P _L		4.2		W	(3) I _L =6.0mA
Operating Life Time	Hr	10,000			Hour	(4)
Startup Voltage	V _s	-	-	1230	Vrms	25°C, (5)
				1480	Vrms	0°C, (5)
Lamp startup time		-	-	1.0	sec	(5)
Leakage Current	I _{leak}	-	-	2.0	mArms	(7)

Note) The waveform of the inverter output voltage must be area symmetric and the design of the inverter must have specifications for the modularized lamp.

The performance of the backlight, for example life time or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter.

When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter(miss lighting, flicker, etc.) never occur. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Note (1) Lamp current is measured with a high frequency current meter as shown below.

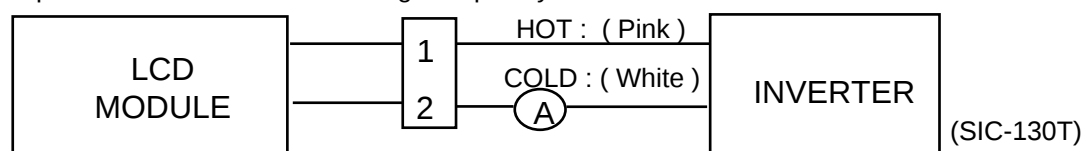

(2) Lamp frequency may produce interference with horizontal synchronous frequency and this may cause line flow on the display. Therefore lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible in order to avoid interference.

(3) refer to $I_L \times V_L$ to calculate.

(4) Life time (Hr) of a lamp can be defined as the time in which it continues to operate under the condition $T_a = 25 \pm 2 \text{ } ^\circ\text{C}$ and $I_L = 6.0 \text{ mArms}$ until one of the following event occurs.

1. When the brightness becomes 50% or lower than the original.

(5) The voltage above this value should be applied to the lamp for more than 1 second to startup. Otherwise the lamp may not be turned on.

(6) The minimum duty ratio of inverter should become more than 15%


(7) Leakage current is defined as below.

$$I_{\text{leak}} = I_{\text{HOT}} - I_{\text{COLD}}$$


Samsung Secret

4. BLOCK DIAGRAM

4.1 TFT LCD Module

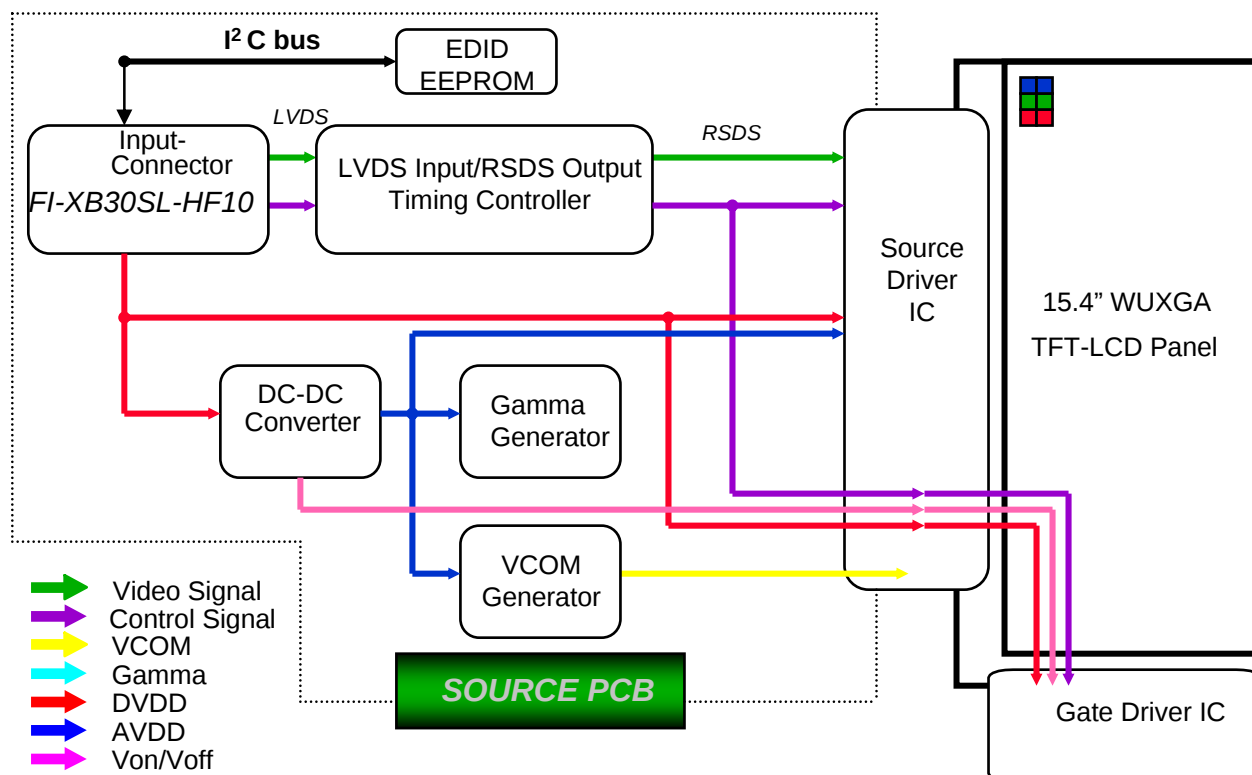

4.2 BACK-LIGHT UNIT

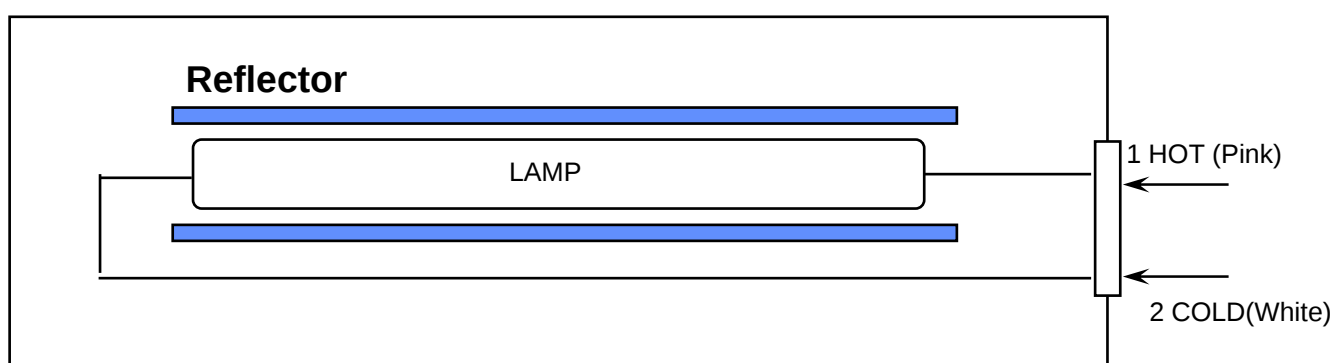

Samsung Secret

5. INPUT TERMINAL PIN ASSIGNMENT

5.1. Input Signal & Power (LVDS, Connector : JAE FI-XB30SL-HF10)
Mating Connector : JAE FI-X30M)

No.	Symbol	Function	Polarity	Remarks
1	GND	Ground		
2	VDD	POWER SUPPLY +3.3V		
3	VDD	POWER SUPPLY +3.3V		
4	VEEDID	DDC 3.3V Power		
5	GND	Ground		
6	CLKEDID	DDC Clock		
7	DATAEDID	DDC data		
8	O_RxIN0-	LVDS Differential Data INPUT (Odd R0-R5,G0)	Negative	
9	O_RxIN0+	LVDS Differential Data INPUT (Odd R0-R5,G0)	Positive	
10	GND	Ground		
11	O_RxIN1-	LVDS Differential Data INPUT (Odd G1-G5,B0-B1)	Negative	
12	O_RxIN1+	LVDS Differential Data INPUT (Odd G1-G5,B0-B1)	Positive	
13	GND	Ground		
14	O_RxIN2-	LVDS Differential Data INPUT (Odd B2-B5,Sync,DE)	Negative	
15	O_RxIN2+	LVDS Differential Data INPUT (Odd B2-B5,Sync,DE)	Positive	
16	GND	Ground		
17	O_RxCLK-	LVDS Differential Data INPUT (Odd Clock)	Negative	
18	O_RxCLK+	LVDS Differential Data INPUT (Odd Clock)	Positive	
19	GND	Ground		
20	E_RxIN0-	LVDS Differential Data INPUT (Even R0-R5,G0)	Negative	
21	E_RxIN0+	LVDS Differential Data INPUT (Even R0-R5,G0)	Positive	
22	GND	Ground		
23	E_RxIN1-	LVDS Differential Data INPUT (Even G1-G5,B0-B1)	Negative	
24	E_RxIN1+	LVDS Differential Data INPUT (Even G1-G5,B0-B1)	Positive	
25	GND	Ground		
26	E_RxIN2-	LVDS Differential Data INPUT (Even B2-B5,Sync,DE)	Negative	
27	E_RxIN2+	LVDS Differential Data INPUT (Even B2-B5,Sync,DE)	Positive	
28	GND	Ground		
29	E_RxCLK-	LVDS Differential Data INPUT (Even Clock)	Negative	
30	E_RxCLK+	LVDS Differential Data INPUT (Even Clock)	Positive	

Samsung Secret

5.2 LVDS Interface : Transmitter DS90CF363 or Compatible

LVDS for Odd pixel


Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RO0	12	TxIN11	GO5
45	TxIN1	RO1	13	TxIN12	BO0
47	TxIN2	RO2	15	TxIN13	BO1
48	TxIN3	RO3	16	TxIN14	BO2
1	TxIN4	RO4	18	TxIN15	BO3
3	TxIN5	RO5	19	TxIN16	BO4
4	TxIN6	GO0	20	TxIN17	BO5
6	TxIN7	GO1	22	TxIN18	Hsync
7	TxIN8	GO2	23	TxIN19	Vsync
9	TxIN9	GO3	25	TxIN20	DE
10	TxIN10	GO4	26	TxCLK IN	Clock

LVDS for Even pixel

Pin No.	Name	RGB Signal	Pin No.	Name	RGB Signal
44	TxIN0	RE0	12	TxIN11	GE5
45	TxIN1	RE1	13	TxIN12	BE0
47	TxIN2	RE2	15	TxIN13	BE1
48	TxIN3	RE3	16	TxIN14	BE2
1	TxIN4	RE4	18	TxIN15	BE3
3	TxIN5	RE5	19	TxIN16	BE4
4	TxIN6	GE0	20	TxIN17	BE5
6	TxIN7	GE1	22	TxIN18	Hsync
7	TxIN8	GE2	23	TxIN19	Vsync
9	TxIN9	GE3	25	TxIN20	DE
10	TxIN10	GE4	26	TxCLK IN	Clock

Samsung Secret

Flat Link Interface

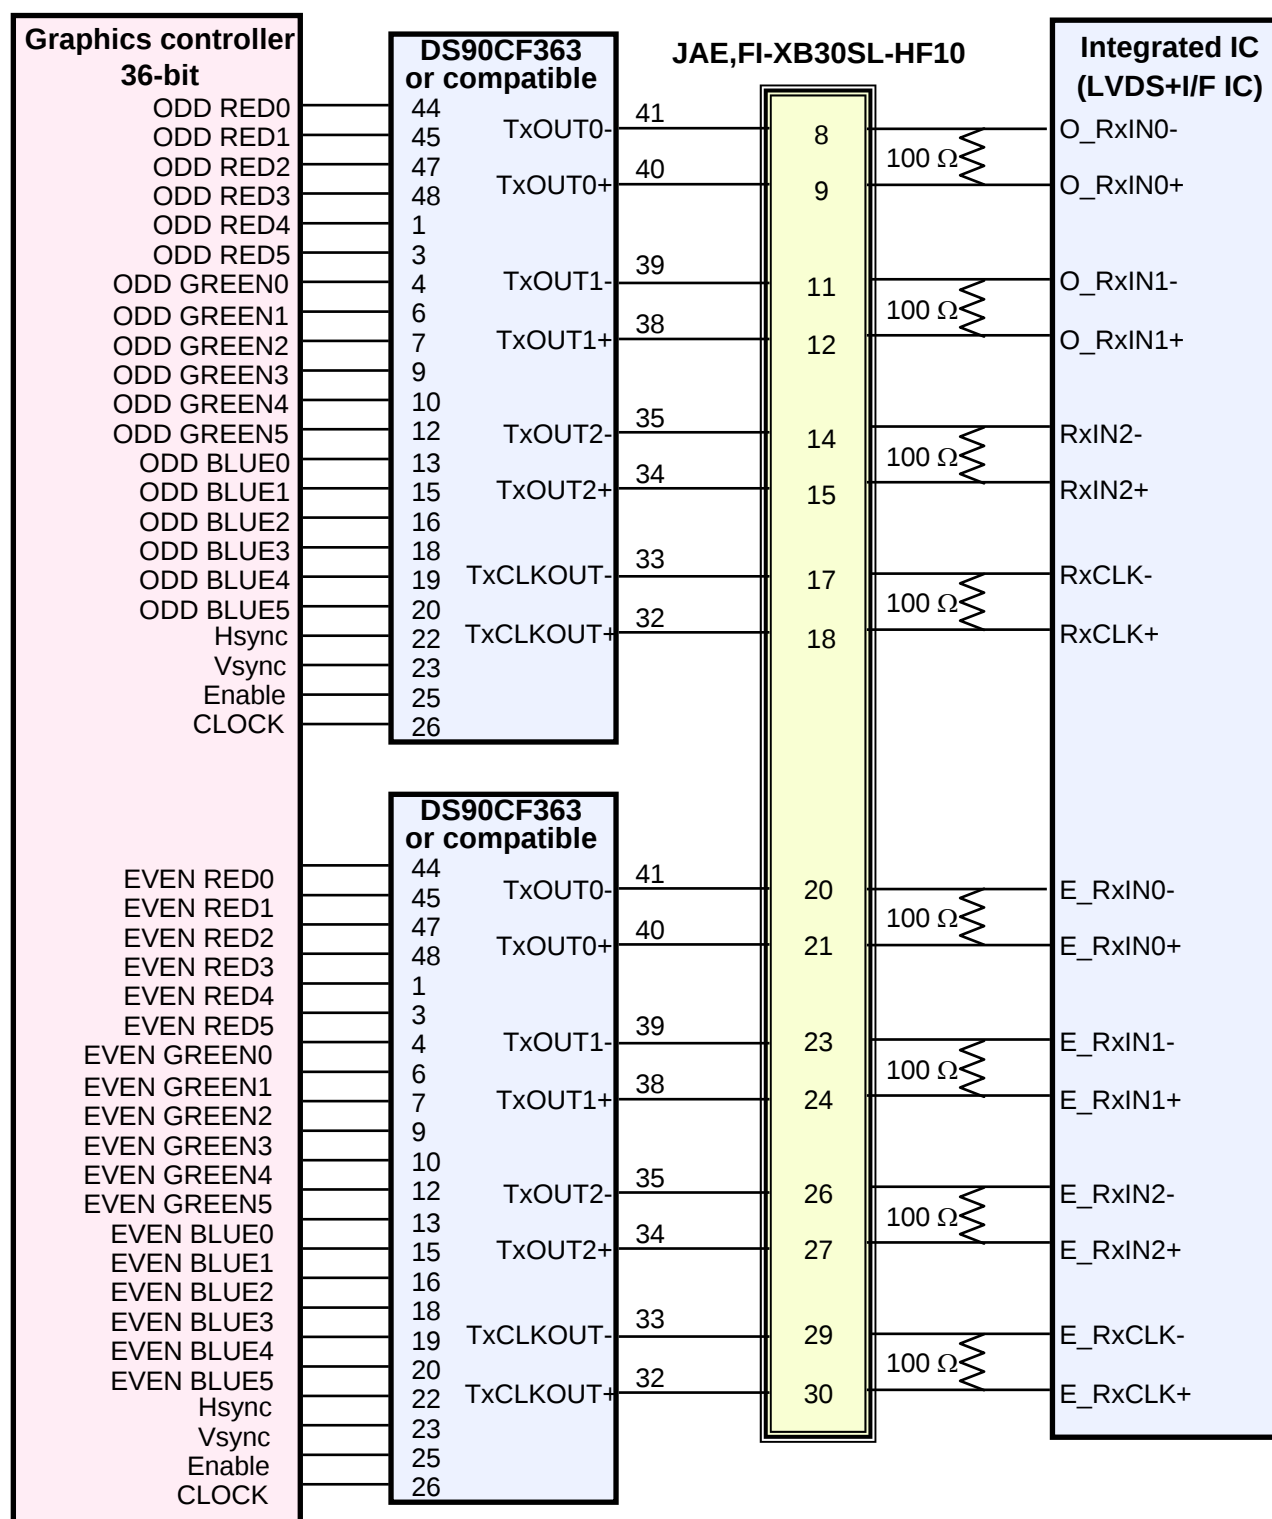

Note : The LCD Module uses a 100ohm resistor between positive and negative lines of each receiver input.

Samsung Secret

5.3 BACK LIGHT UNIT


Connector : JST BHSR - 02VS -1

Mating Connector : SM02B-BHSS-1(JST)

Pin NO.	Symbol	Color	Function
1	HOT	Pink	High Voltage
2	COLD	White	Low Voltage

5.4 Timing Diagrams of LVDS For Transmission

LVDS Receiver : Integrated T-CON

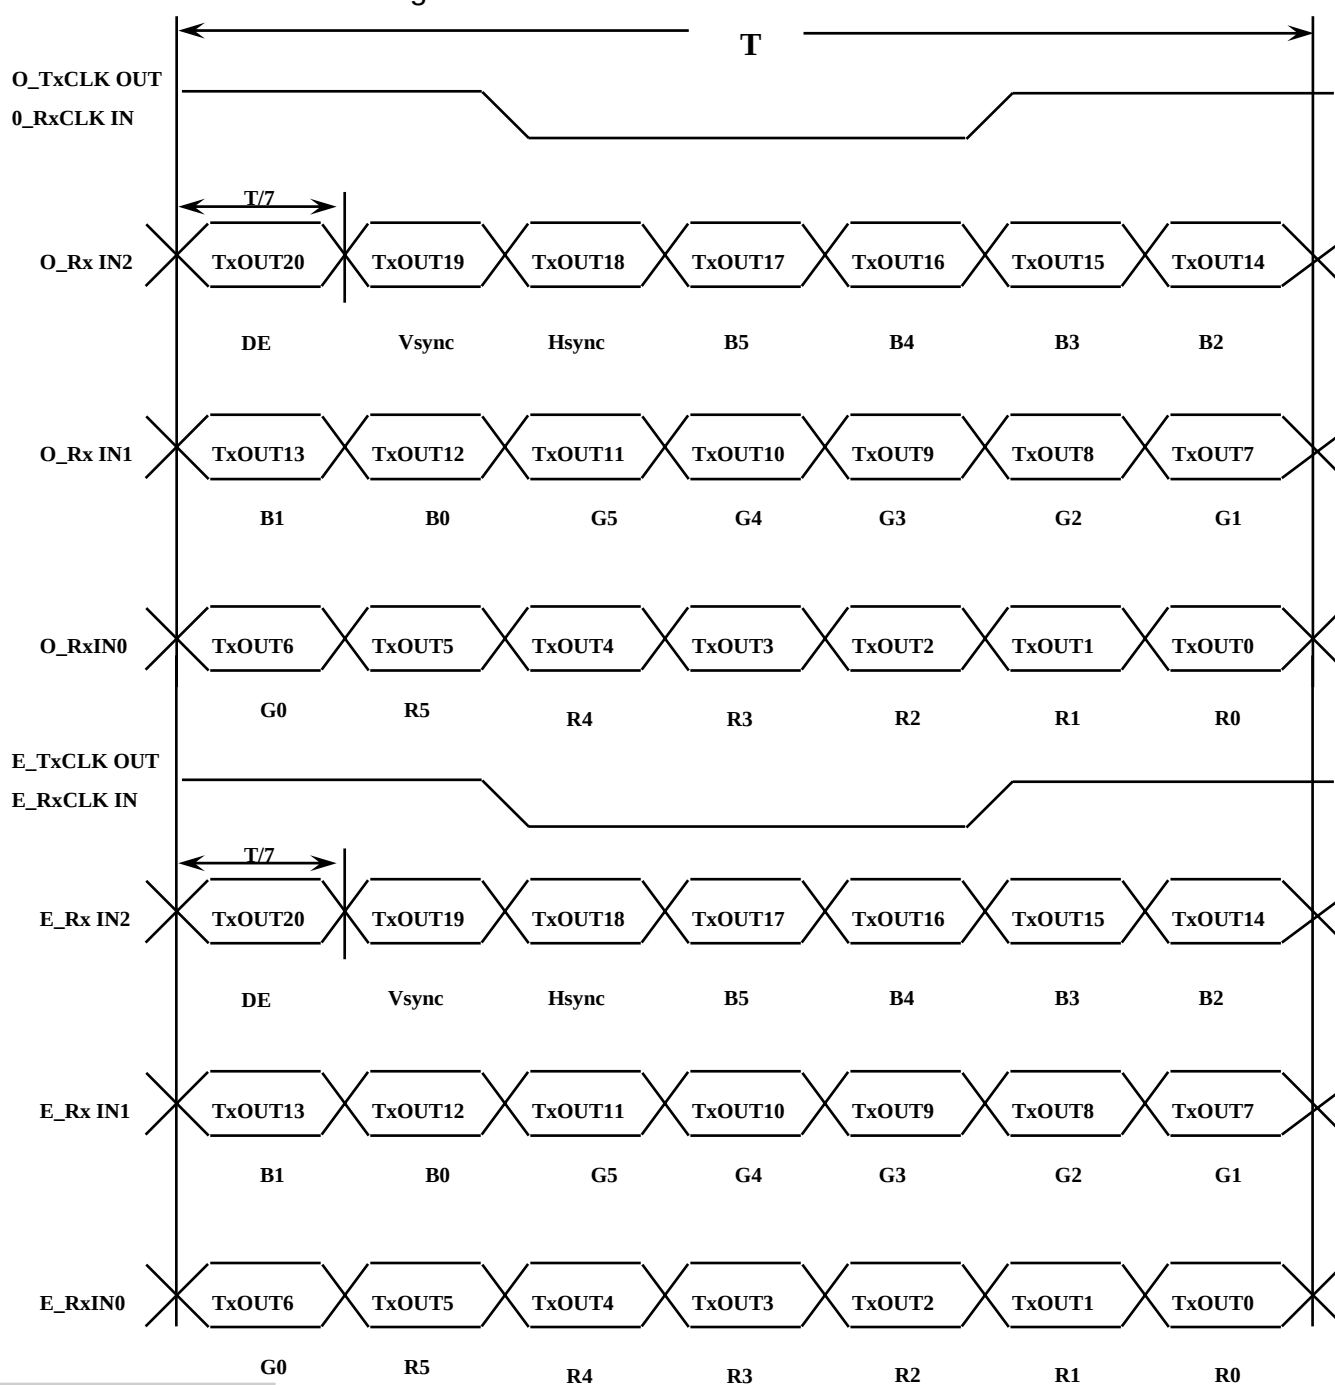

Samsung Secret

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

Color	Display	Data Signal																	Gray Scale Level	
		Red						Green						Blue						
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	45		B5
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	-
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	-
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	-
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	-
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1	-
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	-
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
Gray Scale Of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0
	Dark	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
	↑	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~R60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R61
	Light	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R62
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	R63
Gray Scale Of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0
	Dark	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	G1
	↑	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	G2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~G60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0	G61
	Light	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	G62
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	G63
Gray Scale Of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0
	Dark	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B1
	↑	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	B2
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~B60
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
	↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	B61
	Light	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	B62
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B63


Note 1) Definition of gray :

Rn: Red gray, Gn: Green gray, Bn: Blue gray (n=gray level)

Note 2) Input signal: 0 =Low level voltage, 1=High level voltage

Samsung Secret

5.6 Pixel Format in the display

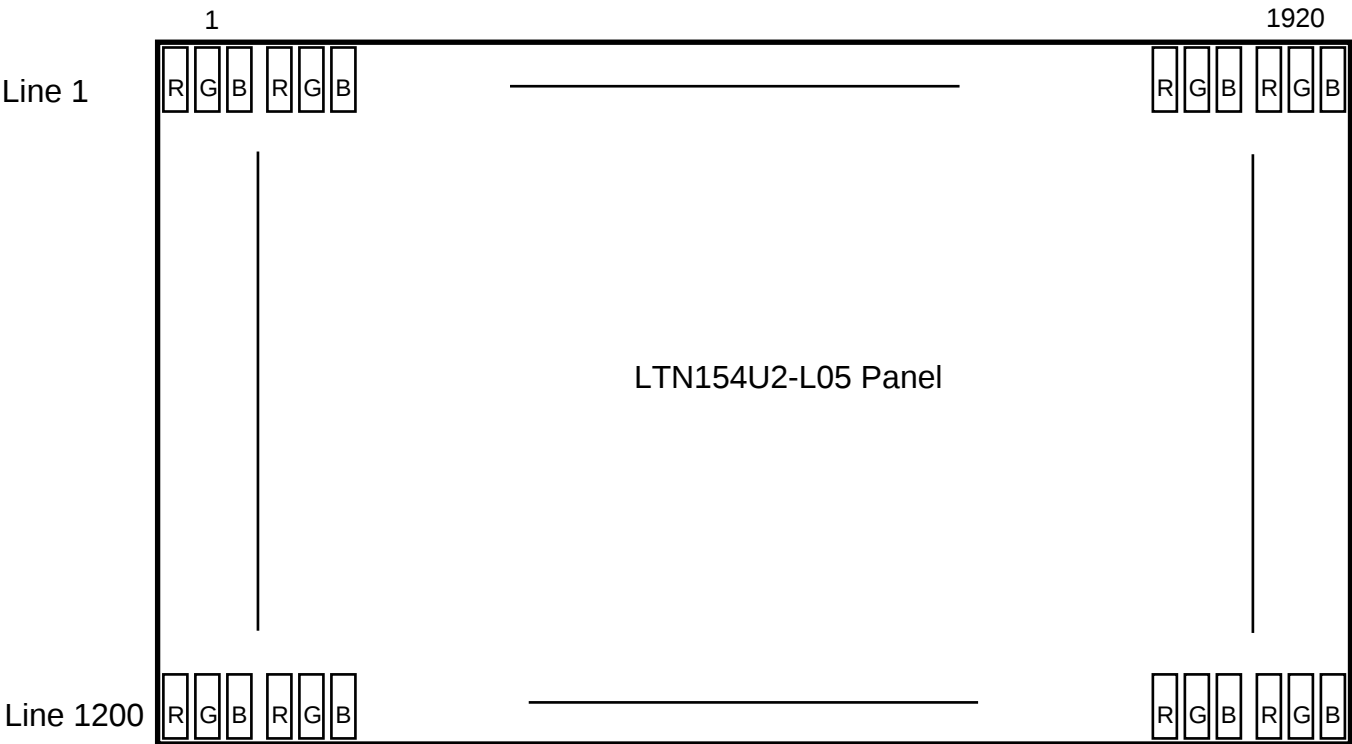


Samsung Secret

6. INTERFACE TIMING

6.1 Timing Parameters

Signal	Item	Symbol	MIN	TYP	MAX	Unit	Note
Frame Frequency	Cycle	T_v	1204	1220	1400	lines	
Vertical Active Display Term	Display Period	T_{vD}	-	1200	-	lines	
One Line Scanning Time	Cycle	T_H	1030	1104	1170	clocks	
Horizontal Active Display Term	Display Period	T_{HD}	-	960	-	clocks	

6.2 Timing diagrams of interface signal

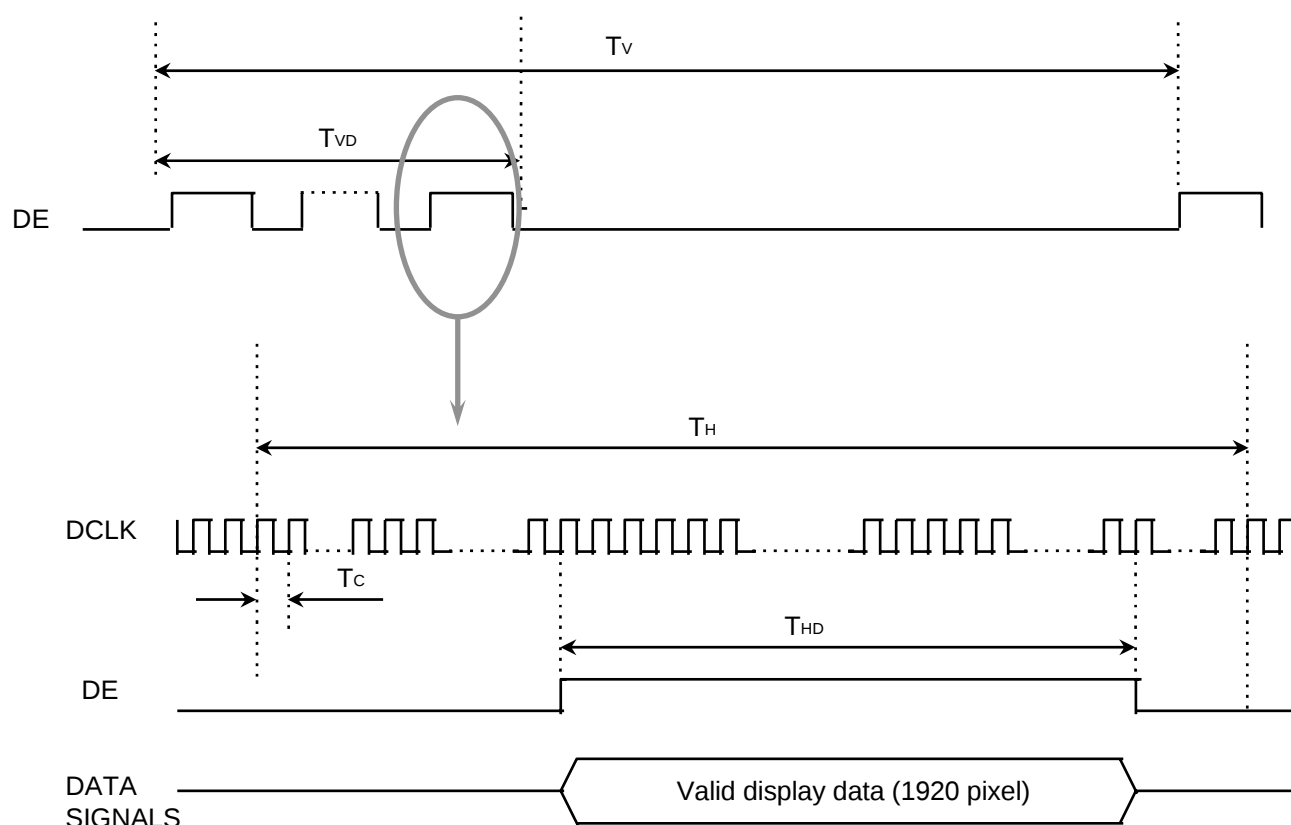


Samsung Secret

6.3 Power ON/OFF Sequence

Approval

: To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

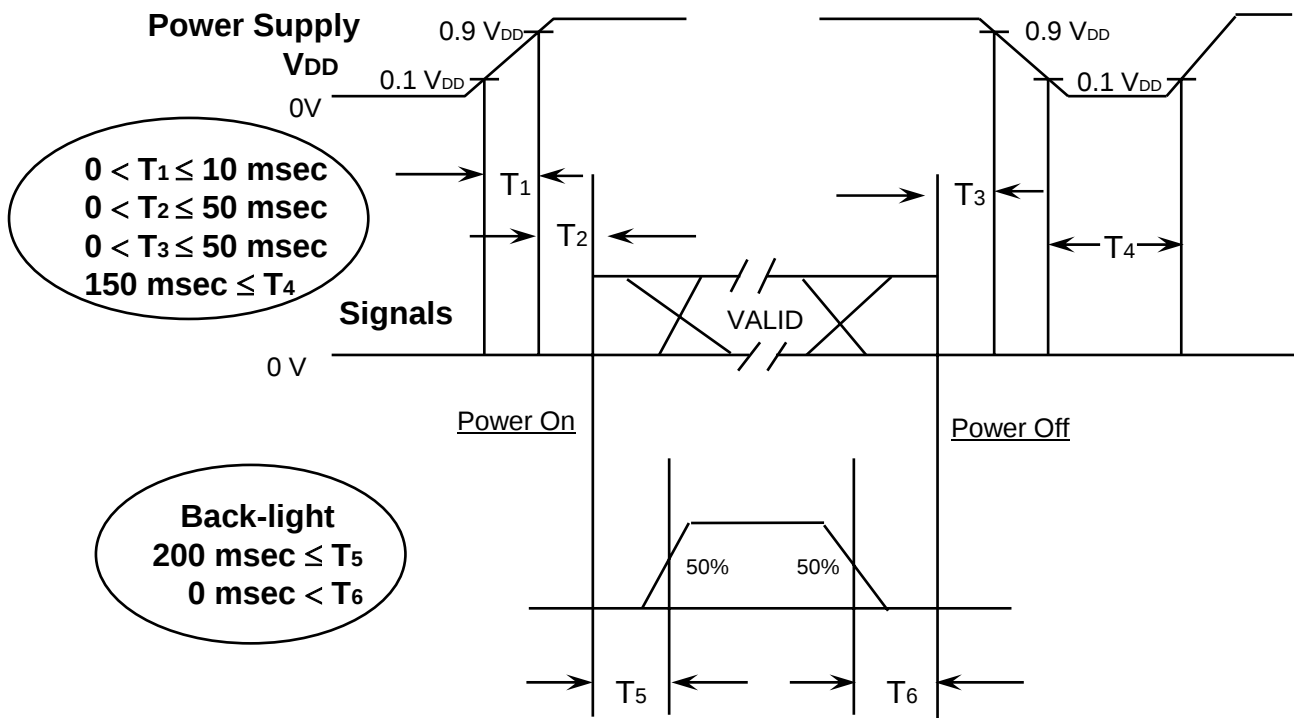

Power ON/OFF Sequence

- T1 : Vdd rising time from 10% to 90%
- T2 : The time from Vdd to valid data at power ON.
- T3 : The time from valid data off to Vdd off at power Off.
- T4 : Vdd off time for Windows restart
- T5 : The time from valid data to B/L enable at power ON.
- T6 : The time from valid data off to B/L disable at power Off.

NOTE.

- (1) The supply voltage of the external system for the module input should be the same as the definition of VDD.
- (2) Apply the lamp voltage within the LCD operation range. When the back-light turns on before the LCD operation or the LCD turns off before the back-light turns off, the display may momentarily become white.
- (3) In case of VDD = off level, please keep the level of input signals on the low or keep a high impedance.
- (4) T4 should be measured after the module has been fully discharged between power off and on period.
- (5) Interface signal shall not be kept at high impedance when the power is on.

Samsung Secret


7. Mechanical Outline Dimension

Approval

[Refer to the next page]

Samsung Secret

Doc.No.	LTN154U2-L05	Rev.No	04-A03-S-070504	Page	22 / 29
---------	--------------	--------	-----------------	------	---------

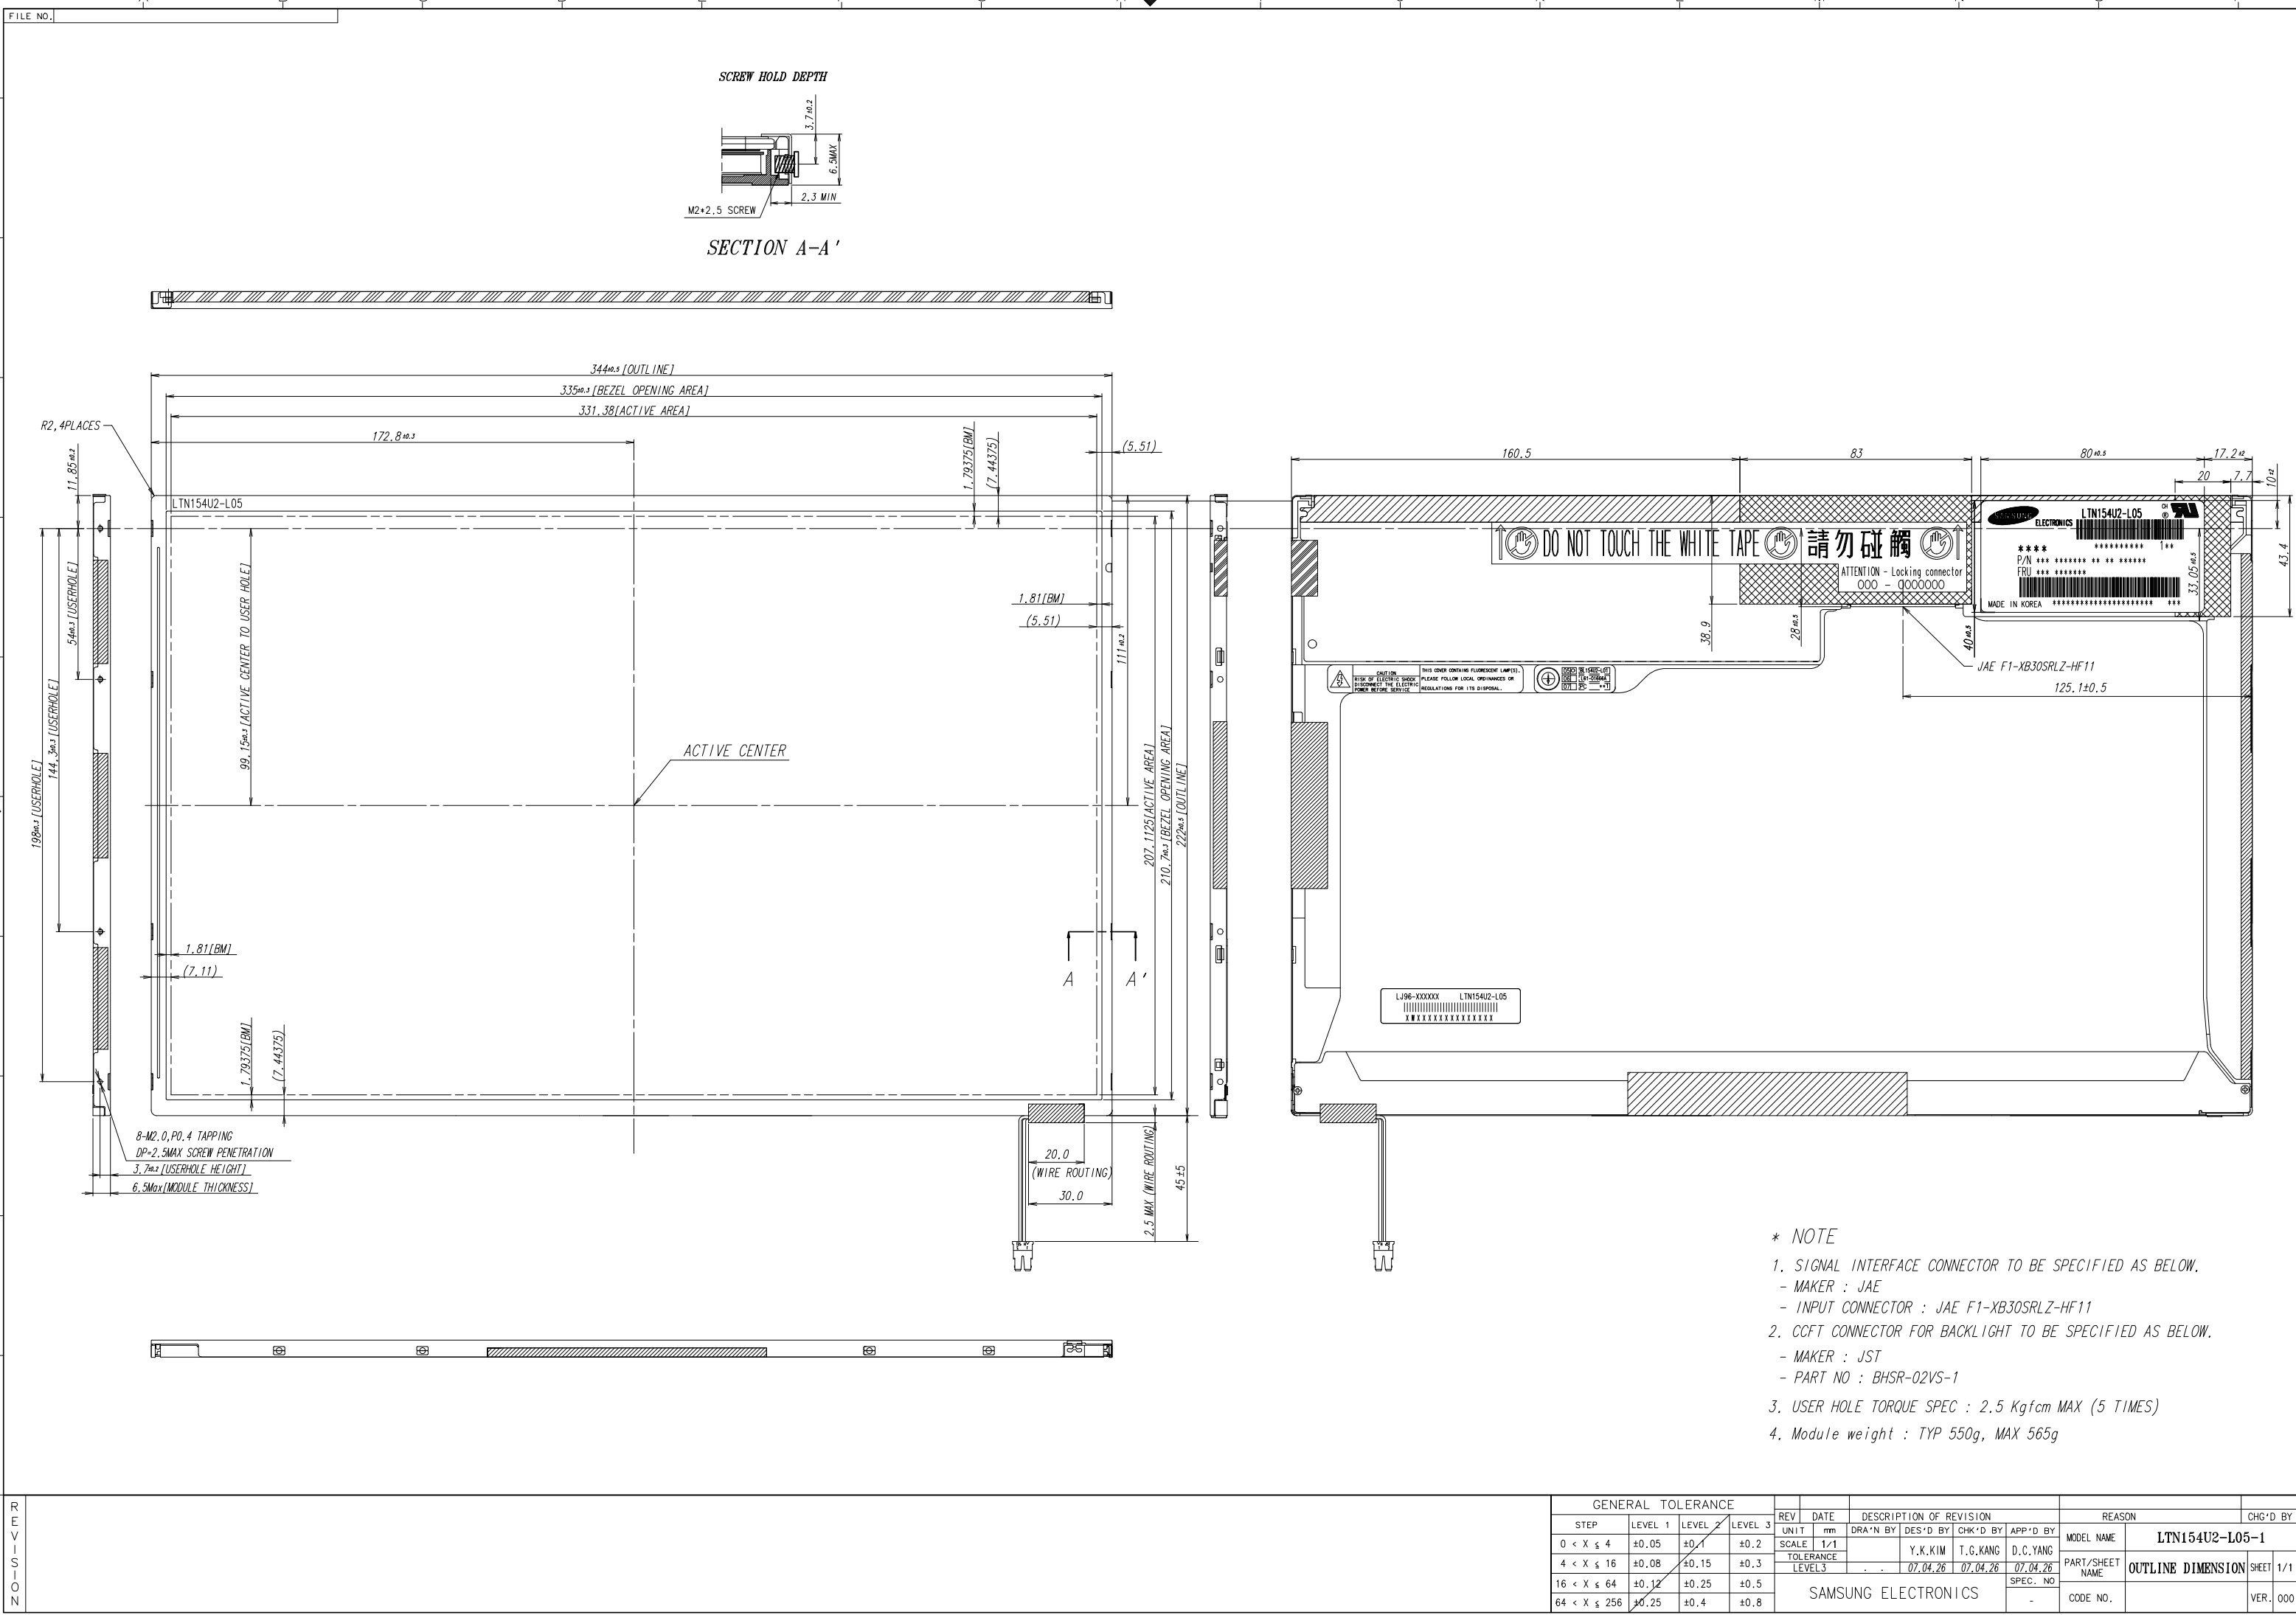

REVISION	GENERAL TOLERANCE				REV	DATE	DESCRIPTION OF REVISION				REASON		CHG'D BY
	STEP	LEVEL 1	LEVEL 2	LEVEL 3	UNIT	mm	DRAWN BY	DES'D BY	CHK'D BY	APP'D BY	MODEL NAME	LTN154U2-L05-1	
	0 < X ≤ 4	±0.05	±0.1	±0.2	SCALE	1/1		Y.K.KIM	T.G.KANG	D.C.YANG	PART/SHEET NAME	OUTLINE DIMENSION	SHEET 1/1
	4 < X ≤ 16	±0.08	±0.15	±0.3	TOLERANCE			07.04.26	07.04.26	07.04.26			
	16 < X ≤ 64	±0.12	±0.25	±0.5	LEVEL 3								
	64 < X ≤ 256	±0.25	±0.4	±0.8	SAMSUNG ELECTRONICS						CODE NO.		VER. 000

8. Product Markings and Others


A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.

(1) Parts number : LTN154U2-L05

(2) Revision : One letter


(3) Control code : One letter

(4) Lot number : 4 K 5 C XX XX XX 000

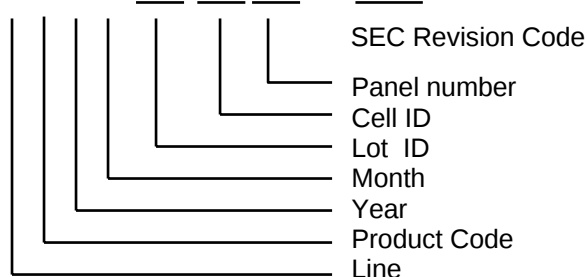

NOTE 1). This code indicating year is omitted in the products of Chun-an site.

(5) Product Label Definition

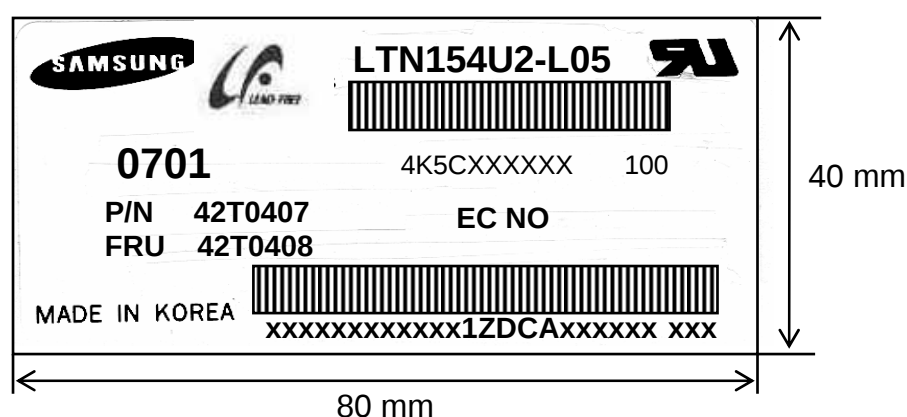

TFT-LCD Product name : LTN154U2-L05
 Lot number : 4K5CXXXXXX
 Revision Code : 100
 Inspected work week : 0701(2007 Year, 1th week)
 P/N : Lenovo Part Number (42T0407)
 EC NO : Engineering Change Number (Blank)
 FRU : Field Replaceable Unit Part Number(42T0408)
 Header Code : 1ZDCA

Samsung Secret

10. GENERAL PRECAUTIONS

1. Handling

- (a) When the module is assembled, It should be attached to the system firmly using every mounting holes. Be careful not to twist and bend the modules.
- (b) Refrain from strong mechanical shock and / or any force to the module. In addition to damage, this may cause improper operation or damage to the module and CCFT backlight.
- (c) Note that polarizers are very fragile and could be easily damaged. Do not press or scratch the surface harder than a HB pencil lead.
- (d) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, Staining and discoloration may occur.
- (e) If the surface of the polarizer is dirty, clean it using some absorbent cotton or soft cloth.
- (f) The desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (g) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.
- (h) Protect the module from static, it may cause damage to the C-MOS Gate Array IC.
- (i) Use fingerstalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (j) Do not disassemble the module.
- (k) Do not pull or fold the lamp wire.
- (l) Do not adjust the variable resistor which is located on the back side.
- (m) Protection film for polarizer on the module shall be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (n) Pins of I/F connector shall not be touched directly with bare hands.

Samsung Secret

2. STORAGE

- (a) Do not leave the module in high temperature, and high humidity for a long time.
It is highly recommended to store the module with temperature from 0 to 35 °C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD module in direct sunlight.
- (c) The module shall be stored in a dark place. It is prohibited to apply sunlight or fluorescent light during the store.

3. OPERATION

- (a) Do not connect, disconnect the module in the “Power On” condition.
- (b) Power supply should always be turned on/off by following item 6.3
“Power on/off sequence”.
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the backlight connector and its inverter power supply shall be a minimized length and be connected directly. The longer cable between the backlight and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).
- (e) The standard limited warranty is only applicable when the module is used for general notebook applications. If used for purposes other than as specified, SEC is not to be held reliable for the defective operations. It is strongly recommended to contact SEC to find out fitness for a particular purpose.

4. OTHERS

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (the supply voltage variation, input voltage variation, variation in part contents and environmental temperature, so on)
Otherwise the module may be damaged.
- (d) If the module displays the same pattern continuously for a long period of time, it can be the situation when the image “sticks” to the screen.
- (e) This module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.

Samsung Secret

Doc.No.	LTN154U2-L05	Rev.No	04-A03-S-070504	Page	26 / 29
----------------	--------------	---------------	-----------------	-------------	---------

11. EDID

LTN154U2-L05 EDID Sheet for Lenovo						
Address (HEX)	FUNCTION	Value HEX	BIN	DEC	ASCII or Data	Notes
00	Header	00	00000000	0		EDID Header
01		FF	11111111	255		
02		FF	11111111	255		
03		FF	11111111	255		
04		FF	11111111	255		
05		FF	11111111	255		
06		FF	11111111	255		
07		00	00000000	0		
08	ID Manufacturer Name	30	00110000	48	L E N	3 character ID
09		AE	10101110	174		"IBM" as an end-customer
0A	ID Product Code	55	01010101	85		#WUXGA
0B		40	01000000	64		
0C	32-bit serial no.	00	00000000	0		
0D		00	00000000	0		
0E		00	00000000	0		
0F		00	00000000	0		
10	Week of manufacture	00	00000000	0		
11	Year of manufacture	11	00010001	17	2007	2007
12	EDID Structure Ver.	01	00000001	1	1	EDID Ver. 1.0
13	EDID revision #	03	00000011	3	3	EDID Rev. 3
14	Video input definition	80	10000000	128		
15	Max H image size	21	00100001	33	33	33 cm(approx)
16	Max V image size	15	00010101	21	21	21 cm(approx)
17	Display Gamma	78	01111000	120	2.2	Gamma 2.2
18	Feature support	EA	11101010	234		
19	Red/green low bits	87	10000111	135		10000111
1A	Blue/white low bits	F5	11110101	245		11111110
1B	Red x/ high bits	94	10010100	148	0.580	Red x0.569= 1001010010
1C	Red y	57	01010111	87	0.340	Red y0.332= 0101011100
1D	Green x	4F	01001111	79	0.310	Green x0.312= 0100111101
1E	Green y	8C	10001100	140	0.550	Green y0.544= 1000110011
1F	Blue x	27	00100111	39	0.155	Blue x0.149= 001001111
20	Blue y	27	00100111	39	0.155	Blue y0.132= 001001111
21	White x	50	01010000	80	0.313	White x0.313= 0101000001
22	White y	54	01010100	84	0.329	White y0.329= 0101010001
23	Established timing 1	21	00100001	33		
24	Established timing 2	08	00001000	8		
25	Established timing 3	00	00000000	0		
26	Standard timing #1	81	10000001	129		not used
27		80	10000000	128		
28	Standard timing #2	A9	10101001	169		not used
29		40	01000000	64		
2A	Standard timing #3	01	00000001	1		not used
2B		01	00000001	1		
2C	Standard timing #4	01	00000001	1		not used
2D		01	00000001	1		
2E	Standard timing #5	01	00000001	1		not used
2F		01	00000001	1		
30	Standard timing #6	01	00000001	1		not used
31		01	00000001	1		

Samsung Secret

32	Standard timing #7	01	00000001	1		not used
33		01	00000001	1		
34	Standard timing #8	01	00000001	1		not used
35		01	00000001	1		
36	Detailed timing/monitor descriptor #1	70	01110000	112	167.52	Main clock=167.52 MHz
37		41	01000001	65		
38		80	10000000	128	1920	Hor active=960*2 pixels
39		78	01111000	120	376	Hor blanking=376 pixels
3A		71	01110001	113		4bit : 4bit
3B		B0	10110000	176	1200	Vertical active=1200 lines
3C		10	00010000	16	16	Vertical blanking=16 lines
3D		40	01000000	64		4bit : 4bit
3E		30	00110000	48	48	Hor sync. Offset=48 pixels
3F		20	00100000	32	32	H sync. Width=32 pixels
40		33	00110011	51	3	Vsync. Offset=3 lines
					3	Vsync. Width=3 lines
41		00	00000000	0		2bit : 2bit : 2bit : 2bit
42		4B	01001011	75	331	H image size= 331 mm(approx)
43		CF	11001111	207	207	Vimage size = 207 mm(approx)
44		10	00010000	16		
45		00	00000000	0		No Horizontal Border
46		00	00000000	0		No Vertical Border
47		19	00011001	25		
48	Detailed timing/monitor descriptor #2	74	01110100	116	134.28	Main clock= 134.28 MHz (@50Hz)
49		34	00110100	52		
4A		80	10000000	128	1920	Hor active=960*2 pixels
4B		20	00100000	32	288	Hor blanking=288 pixels
4C		71	01110001	113		4bit : 4bit
4D		B0	10110000	176	1200	Vertical active=1200 lines
4E		14	00010100	20	20	Vertical blanking=20 lines
4F		40	01000000	64		4bit : 4bit
50		30	00110000	48	48	Hor sync. Offset=48 pixels
51		20	00100000	32	32	H sync. Width=32 pixels
52		26	00100110	38	2	Vsync. Offset=2 lines
					6	Vsync. Width=6 lines
53		00	00000000	0		2bit : 2bit : 2bit : 2bit
54		4B	01001011	75	331	H image size= 331 mm(approx)
55		CF	11001111	207	207	Vimage size = 207 mm(approx)
56		10	00010000	16		
57		00	00000000	0		No Horizontal Border
58		00	00000000	0		No Vertical Border
59		19	00011001	25		

Samsung Secret

5A	descriptor #3	00	00000000	0		Manufacturer Specified (Timing)
5B		00	00000000	0		
5C		00	00000000	0		
5D		0F	00001111	15		
5E		00	00000000	0		
5F		D1	11010001	209	209	(Horizontal active pixel /8)-31
60		0A	00001010	10		Image Aspect Ratio(16:10)
61		32	00110010	50		Low Refresh Rate #1(50Hz)
62		D1	11010001	209		(Horizontal active pixel /8)-31
63		0A	00001010	10		Image Aspect Ratio(16:10)
64	Detailed timing/monitor descriptor #4	28	00101000	40		Low Refresh Rate #1(40Hz)
65		11	00010001	17		Brightness(1/10nit)
66		01	00000001	1		Feature flag(TN mode)
67		00	00000000	0		
68		4C	01001100	76		supplier ID "SEC"
69		A3	10100011	163		
6A		55	01010101	85	[U]	Product code "P2"
6B		32	00110010	50	[2]	(Hex, LSB first)
6C		00	00000000	0		Monitor Name Tag (ASCII)
6D		00	00000000	0		
6E		00	00000000	0		
6F		FE	11111110	254		
70		00	00000000	0		
71		4C	01001100	76	[L]	
72		54	01010100	84	[T]	
73		4E	01001110	78	[N]	
74		31	00110001	49	[1]	
75		35	00110101	53	[5]	
76		34	00110100	52	[4]	
77		55	01010101	85	[U]	
78		32	00110010	50	[2]	
79		2D	00101101	45	[~]	
7A		4C	01001100	76	[L]	
7B		30	00110000	48	[0]	
7C		35	00110101	53	[5]	
7D		0A	00001010	10	[^]	
7E	Extension Flag	00	00000000	0		
7F	Checksum	21	00100001	33		

Samsung Secret