


## ■ Features

- Colorless transparency lens type
- $\phi 5\text{mm}(\text{T}-1\frac{3}{4})$  all plastic mold type
- High luminosity
- ESD Class(Mil Std-883d Method 3015.7) based on Human Body Model(HBM) : 950V

## ■ Outline dimensions

(unit : mm)

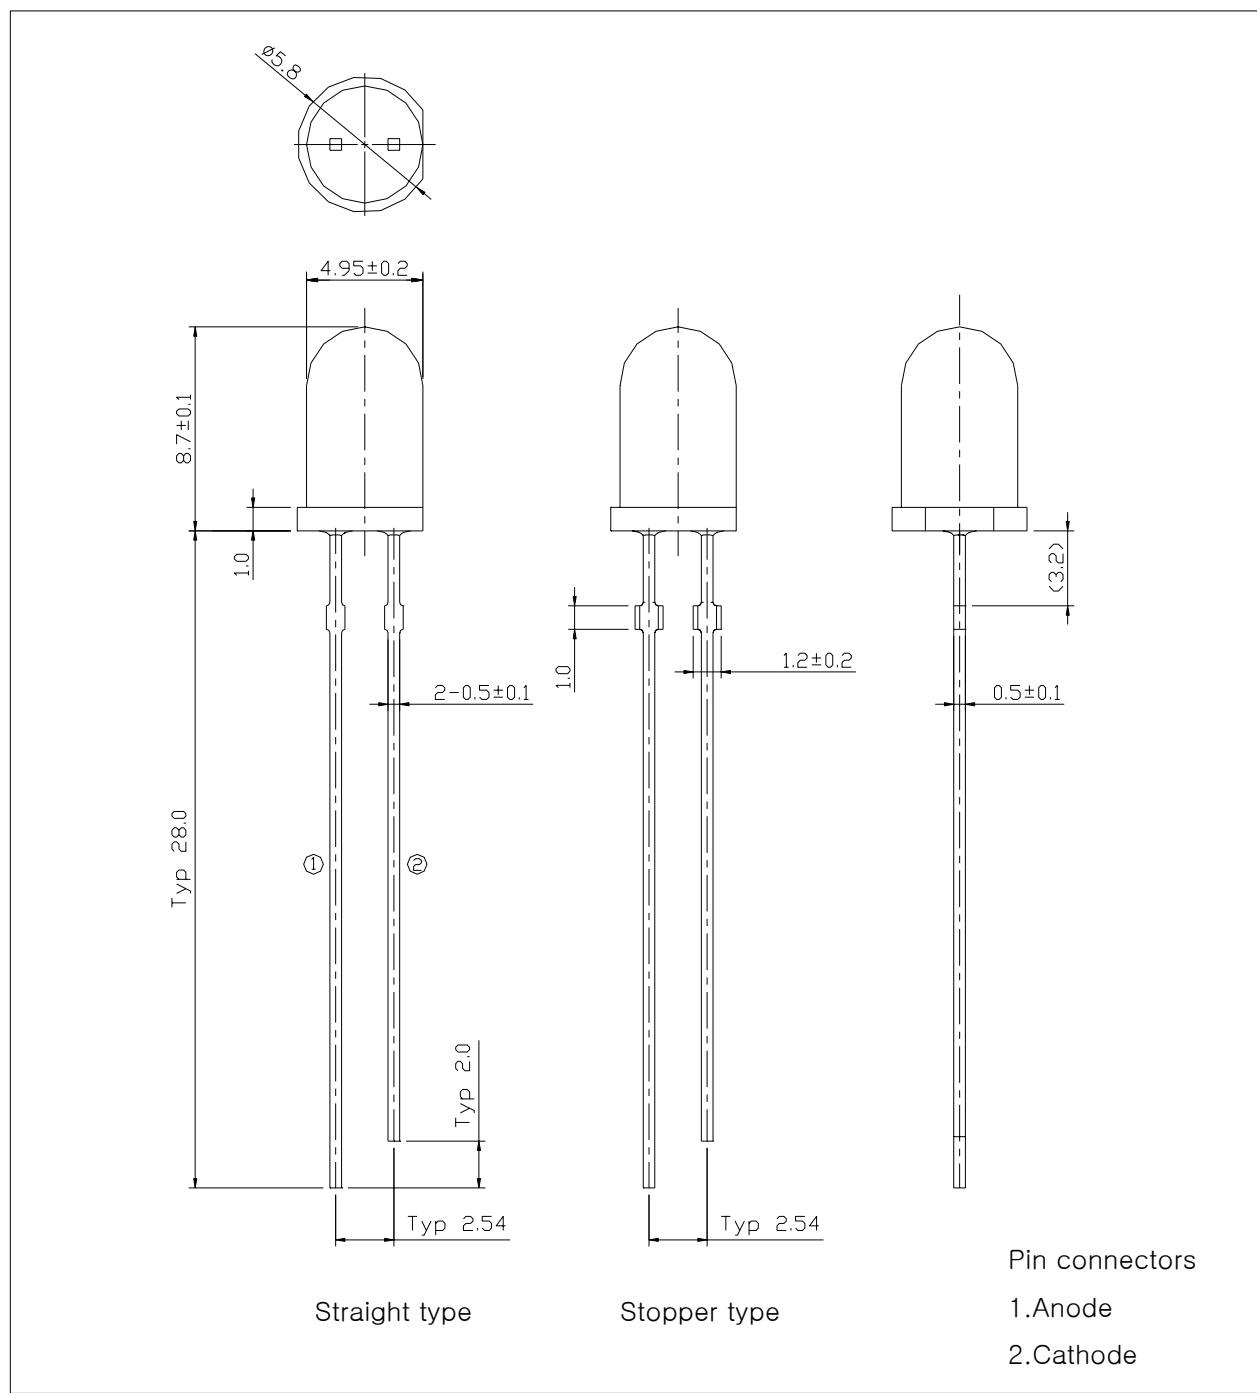

## ■ Absolute Maximum Ratings

Characteristic	Symbol	Ratings	Unit
Power dissipation	P <sub>D</sub>	120	mW
Forward Current	I <sub>F</sub>	30	mA
* <sup>1</sup> Peak Forward Current	I <sub>FP</sub>	100	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +100	°C
* <sup>2</sup> Soldering Temperature	T <sub>sol</sub>	260°C for 3 seconds	

\*1.Duty ratio = 1/16, Pulse width = 0.1ms

\*2.Keep the distance more than 2.0mm from PCB to the bottom of LED package

## ■ Electrical – Optical characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
* <sup>3</sup> Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	3.3	4.0	V
ESD Check Forward Voltage	V <sub>F2</sub>	I <sub>F</sub> = 10μA	2.0	-	-	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	50	uA
* <sup>4</sup> Half Angle	θ1/2	I <sub>F</sub> = 20mA	-	±10	-	deg

\*3. Voltages are tested at a current pulse duration of 1 ms and an accuracy of ±0.1V

\*4. θ1/2 is the off-axis angle where the luminous intensity is 1/2 the peak intensity


White LED Lamp

## ■ Chromaticity Coordinates ranks

(Ta=25°C)

Color RANK		Test Condition	Min.	Typ.	Max.
9	x	$I_F = 20\text{mA}$	0.24	-	0.26
	y		0.19	-	0.25
0	x	$I_F = 20\text{mA}$	0.26	-	0.28
	y		0.22	-	0.28
1	x	$I_F = 20\text{mA}$	0.28	-	0.30
	y		0.25	-	0.31
2	x	$I_F = 20\text{mA}$	0.30	-	0.32
	y		0.28	-	0.34
3	x	$I_F = 20\text{mA}$	0.32	-	0.34
	y		0.30	-	0.36

\* The CIE standard colorimetric system

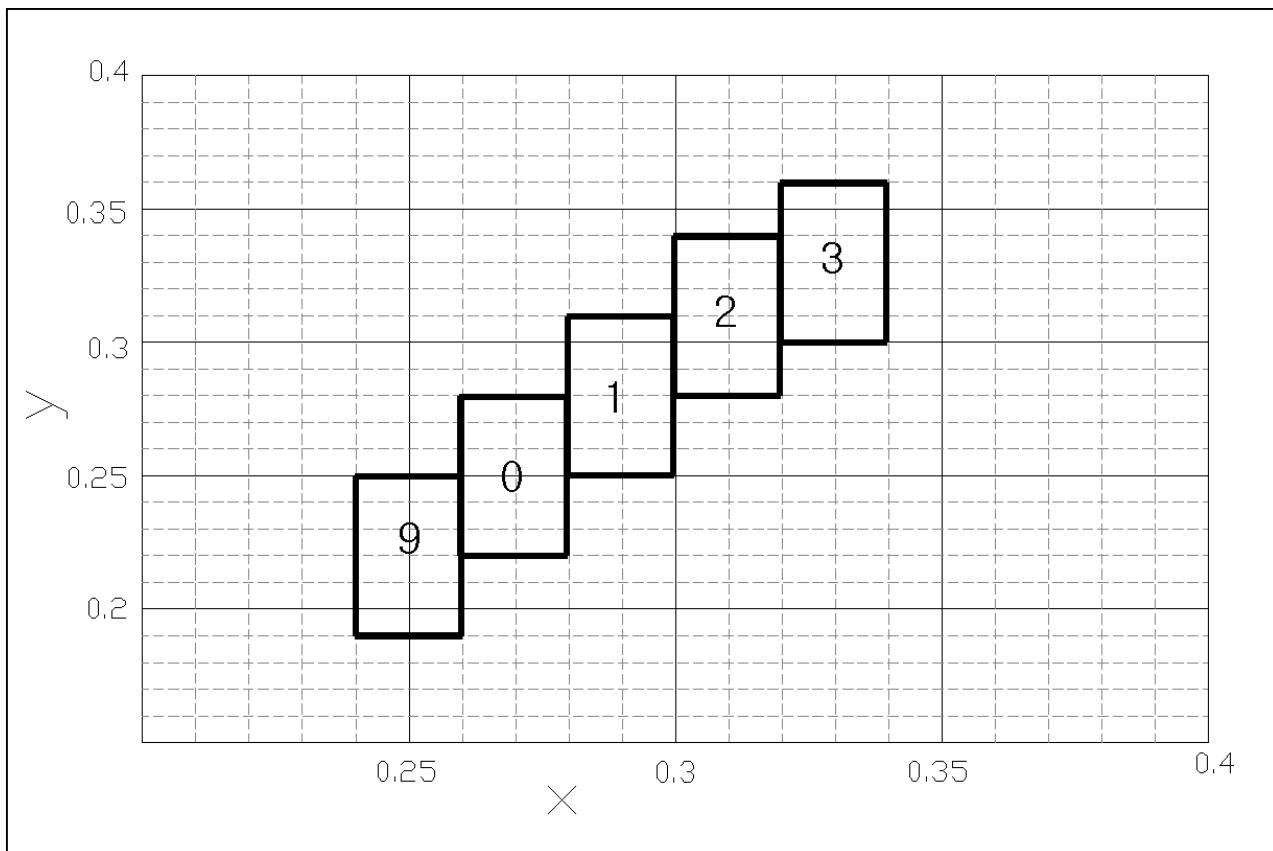

Different and Better

White LED Lamp

**■ Luminous intensity ranks**

(Ta=25°C)

Iv RANK	Test Condition	Min.	Typ.	Max.	Unit
S	IF=20mA	3400	–	4800	mcd
T		4800	–	6700	
U		6700	–	9400	
V		9400	–	13000	

\* Luminous intensity is tested at a current pulse duration of 25 ms and an accuracy of ±11%.


\* Intensity Measured : 0.01sr(CIE. LED\_B)

**■ Precautions On LED using**


\* To avoid optical difference, Please do not mix differently-ranked product.

## ■ Characteristic Diagrams

**Fig. 1 IF-VF**

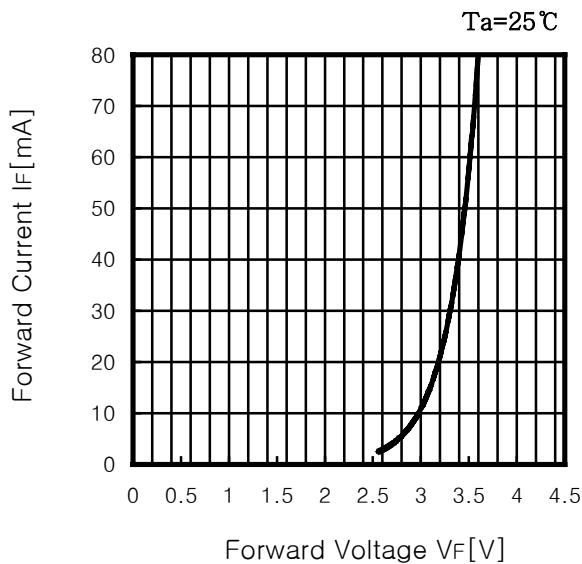

**Fig. 2 Iv-If**

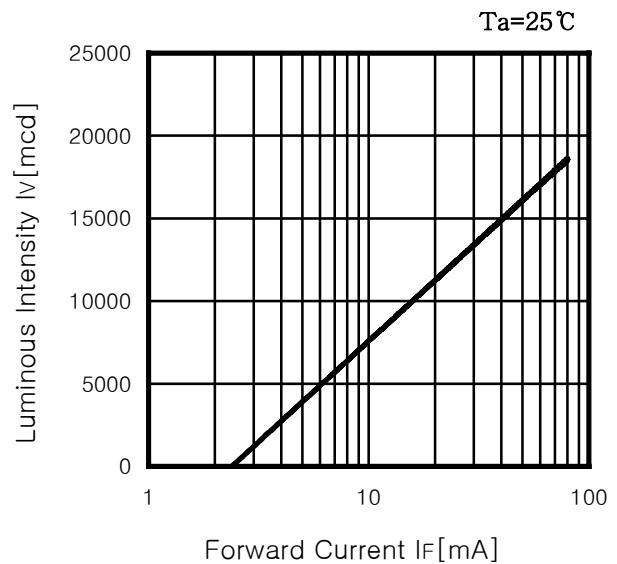

**Fig. 3 If-Ta**

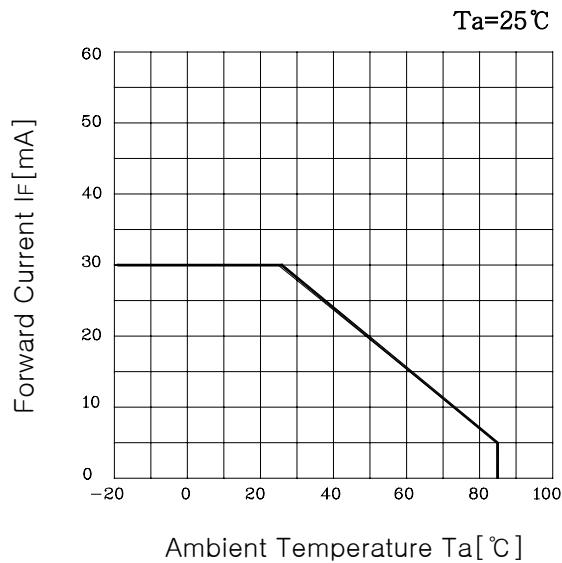


Fig. 4 Radiation Characteristics

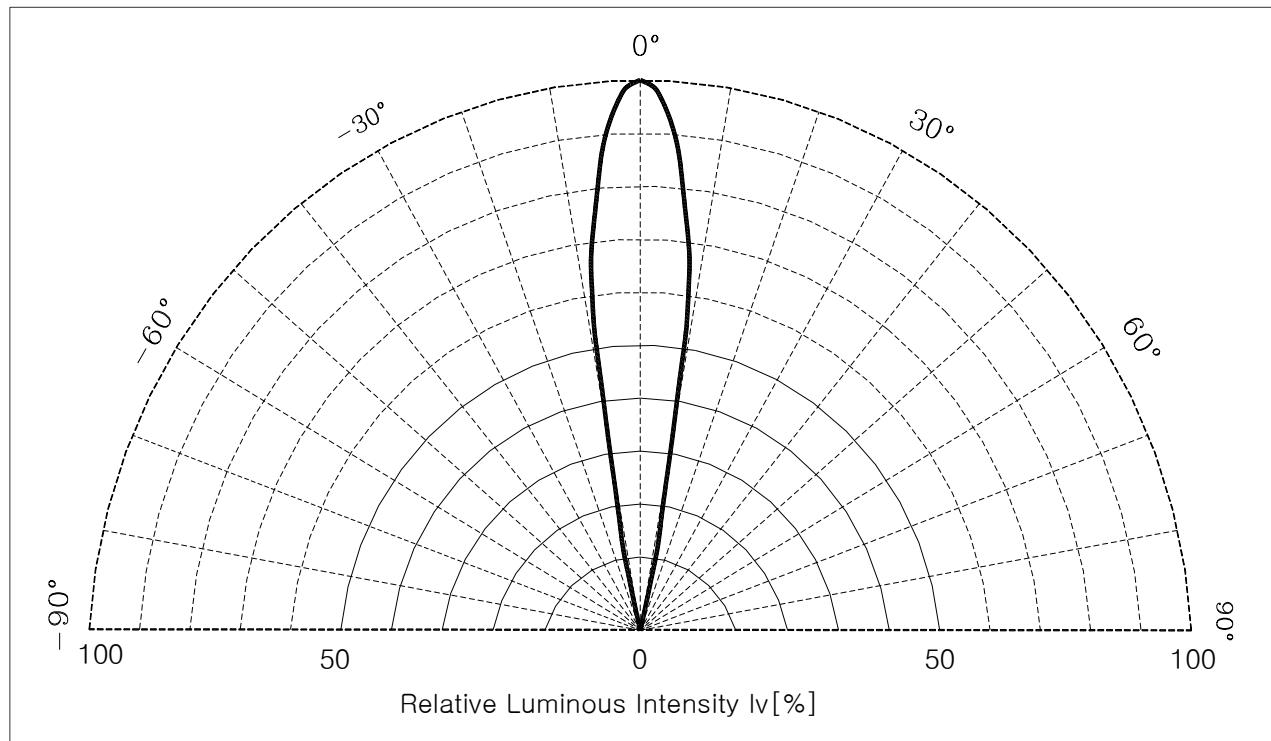
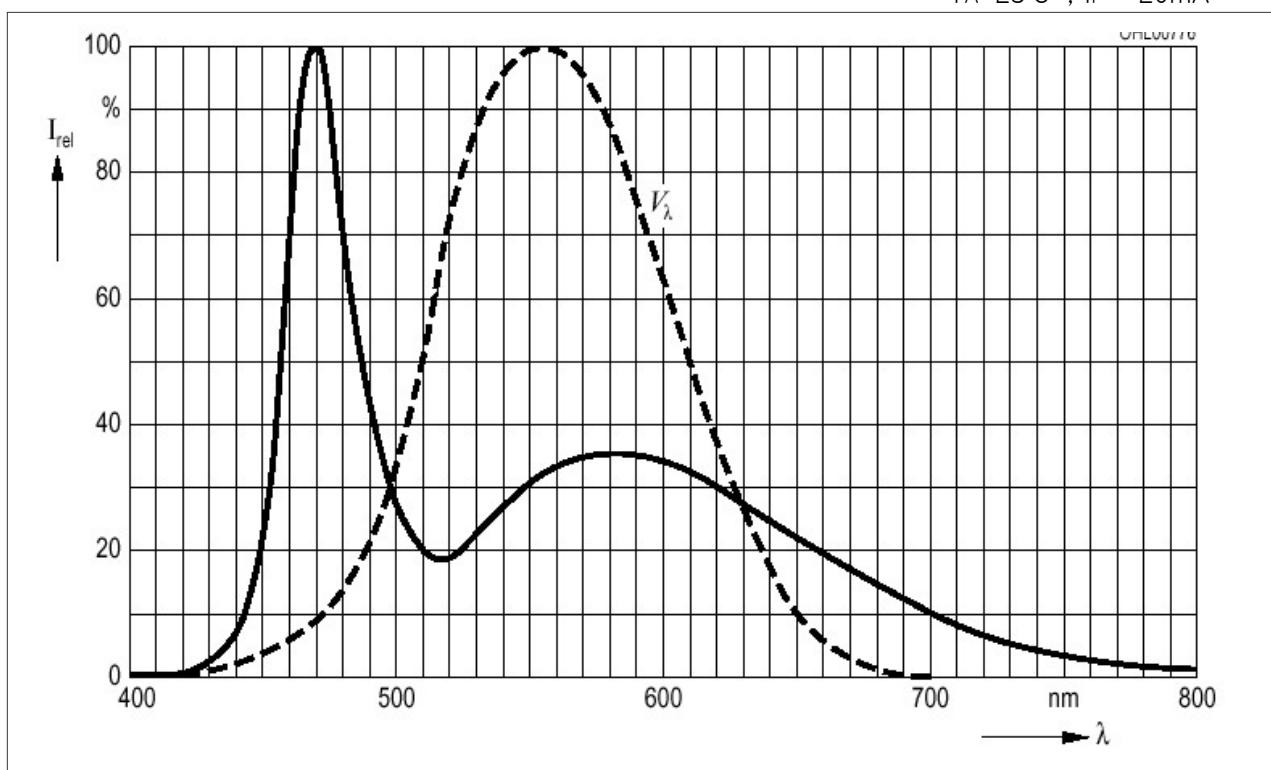


Fig. 5 Spectrum Characteristic

 $T_A = 25^\circ C$  ,  $I_F = 20mA$ 

**■ Revision history sheet**

Spec NO.			
Title	Specification for Approval		
Times	Date	Summary of revision	Remarks
1	2001. 07. 15	신규제정	
2	2003. 02. 26	Format 변경	