


1. Features

- Step-Down DCDC Converter
- Low EMI noise and small footprint using inductor-imbedded ferrite substrate
- High efficiency using synchronous rectifier technology and PFM/PWM auto-select function
- Input voltage range : 2.5 - 5.5V
- Output voltage range : 1.0 - 3.3V
- Maximum Load Current : 1A
- Switching frequency : 4MHz

2. Mechanical details

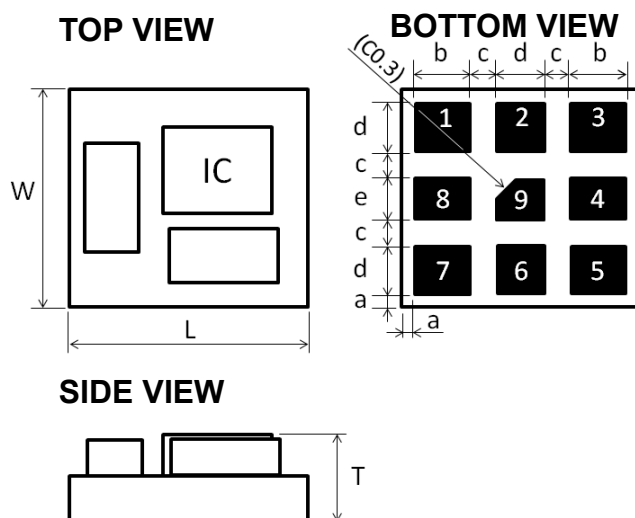

unit (mm)

Symbol	Dimension	Symbol	Dimension
L	3.5+/- 0.2	a	0.2+/- 0.2
W	3.2+/- 0.2	b	0.8+/- 0.1
T	1.3MAX	c	0.4+/- 0.1
		d	0.7+/- 0.1
		e	0.6+/- 0.1

Pin configuration

Pin number	Symbol	I/O	Function
1	EN	Input	ON/OFF control pin H: Enable L: Disable
2,3,5,6,9	GND	—	GND pin
4	Vout	Output	Voltage output pin
7	MODE	Input	Operation mode select pin H: Forced PWM mode, L: PFM/PWM mode
8	Vin	Input	Voltage input pin

3. Ordering Information

Part number	Output Voltage	Device Specific Feature	MOQ
LXDC3EP10A-176	1.0V		T/R,1000pcs/R
LXDC3EP12A-104	1.2V		T/R,1000pcs/R
LXDC3EP15A-105	1.5V		T/R,1000pcs/R
LXDC3EP18A-106	1.8V		T/R,1000pcs/R
LXDC3EP25A-109	2.5V		T/R,1000pcs/R
LXDC3EP33A-107	3.3V		T/R,1000pcs/R

4. Electrical Specification

4-1 Absolute maximum ratings

Parameter	symbol	rating	Unit
Maximum input voltage	V _{in}	6.0	V
Operating temperature	T _{OP}	-30 to +85	°C
Storage temperature	T _{STO}	-30 to +85	°C


4-2 Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Operational Input voltage	Vin	LXDC3EP10A-176		2.5	3.7	5.5	V
		LXDC3EP12A-104					
		LXDC3EP15A-105					
		LXDC3EP18A-106					
		LXDC3EP25A-109		3.0	3.7	5.5	
		LXDC3EP33A-107		4.0	5.0	5.5	
UVLO	UVLO				2.2		V
Output voltage	Vout	PWM Mode Vin-Vout>0.7V	LXDC3EP10A-176	0.976	1.0	1.024	V
			LXDC3EP12A-104	1.176	1.2	1.224	
			LXDC3EP15A-105	1.47	1.5	1.53	
			LXDC3EP18A-106	1.764	1.8	1.836	
			LXDC3EP25A-109	2.45	2.5	2.55	
			LXDC3EP33A-107	3.234	3.3	3.366	
Load Current	Iout			0	-	1000	mA


Parameter	Symbol	Condition		Min.	Typ.	Max.	Unit
Ripple Voltage	Vrpl	Vin=3.7V Io=1000mA W=20MHz	LXDC3EP10A-176	-	15	-	mV(p-p)
			LXDC3EP12A-104				
			LXDC3EP15A-105				
			LXDC3EP18A-106				
		Vin=3.7V Io=1000mA W=20MHz	LXDC3EP25A-109	-	20	-	
		Vin=5.0V Io=1000mA W=20MHz	LXDC3EP33A-107	-	20	-	
Efficiency	EFF	Vin=3.7V Io=300mA	LXDC3EP10A-176	82	86	-	%
			LXDC3EP12A-104	84	88	-	
			LXDC3EP15A-105	86	90	-	
			LXDC3EP18A-106	88	92	-	
			LXDC3EP25A-109	90	94	-	
		Vin=5.0V Io=300mA	LXDC3EP33A-107	90	94	-	
Enable Voltage	ENon			1.2	-	-	V
	ENoff			-	-	0.4	
MODE Voltage	MODE-H			1.2	-	-	V
	MODE-L			-	-	0.4	
Frequency	Freq			-	4	-	MHz
Over Current Protection	OCP			1000	1200	1700	mA
Start -up Time	Ton			-	170	-	usec

4-3 Output Current Derating

This product is used by the following temperature derating.

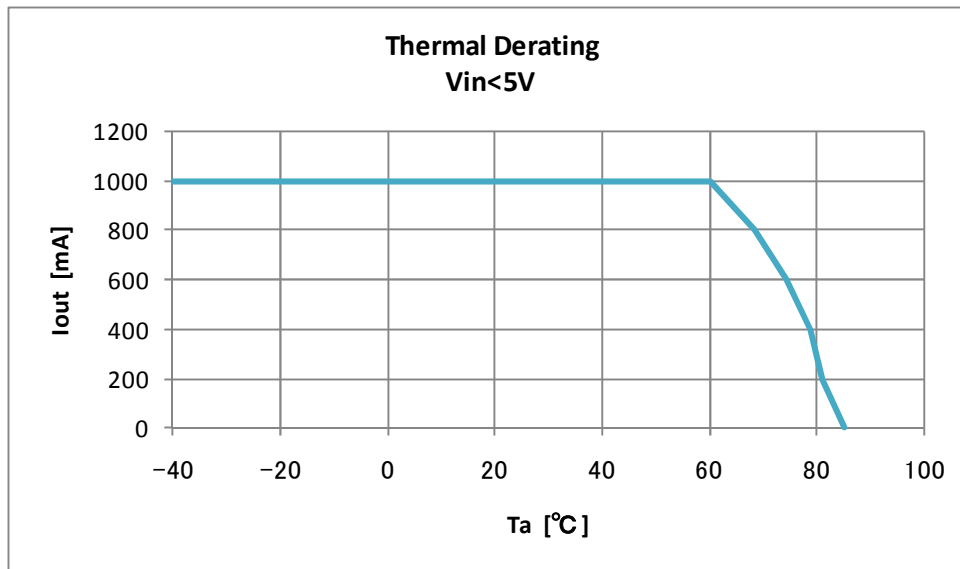


5. Test Circuit

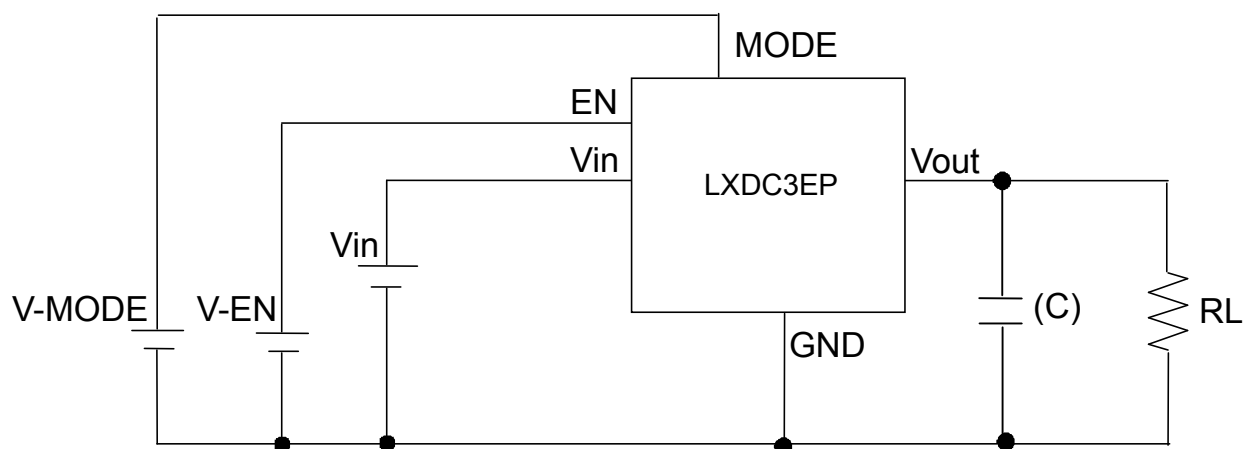

*Optional : Cout: 4.7uF/6.3V (LXDC3EP33A-107)

6. Reference Land Pattern

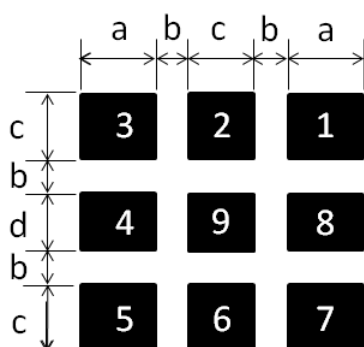


unit (mm)			
Symbol	Dimension	Symbol	Dimension
a	0.8	c	0.7
b	0.4	d	0.6

7. Measurement Data

Micro DCDC Converter evaluation board (P2LX0457B)


Measurement setup

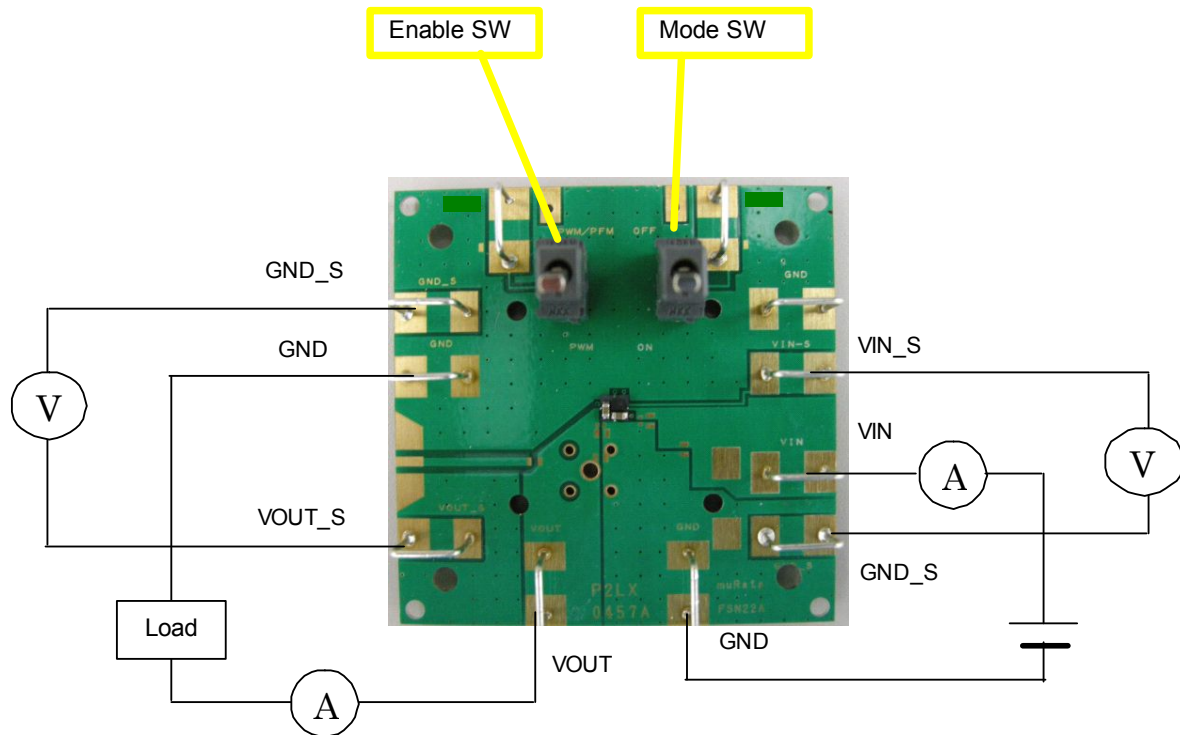


Typical Measurement Data (reference purpose only) (Ta=25°C)

Efficiency


Vin=3.7V, Vout=1.0V

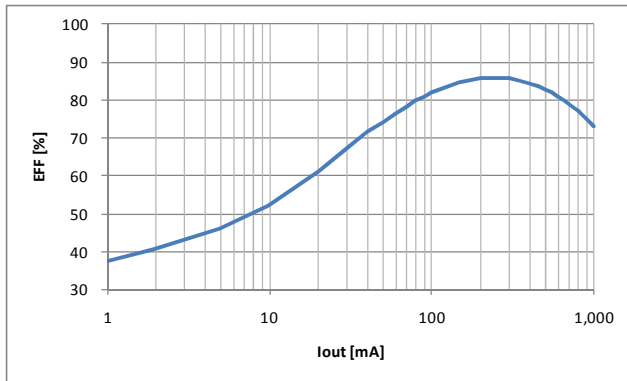


Vin=3.7V, Vout=1.2V

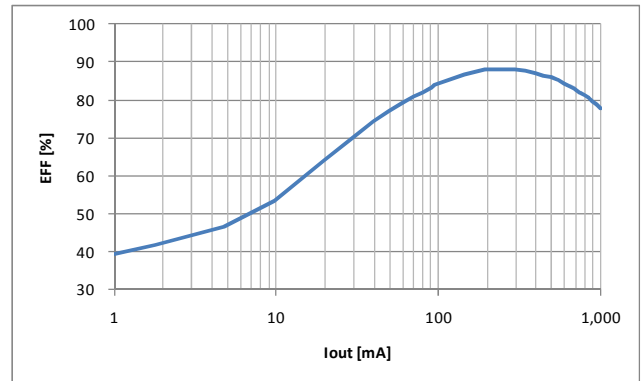


Vin=3.7V, Vout=1.5V

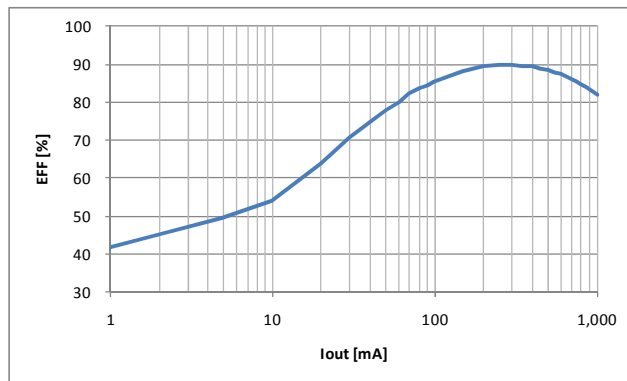


Vin=3.7V, Vout=1.8V

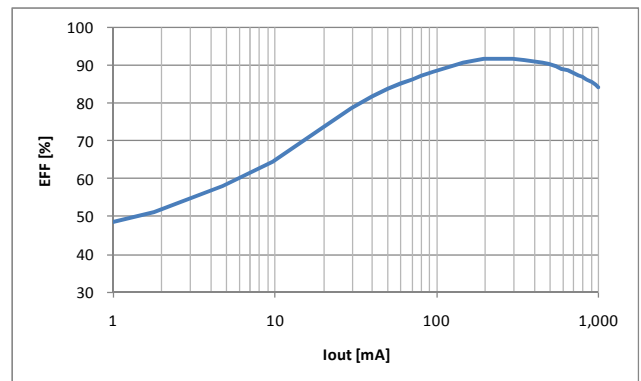

Vin=3.7V, Vout=2.5V

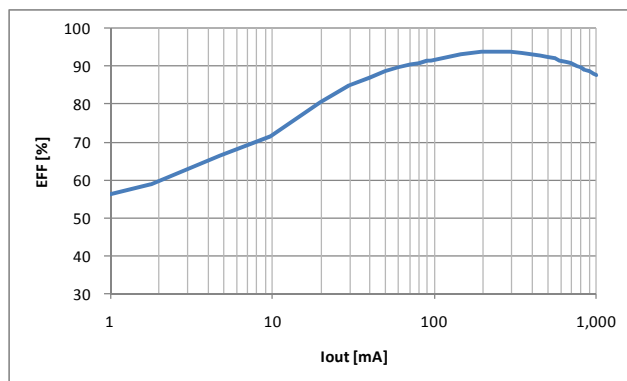


Vin=5.0V, Vout=3.3V

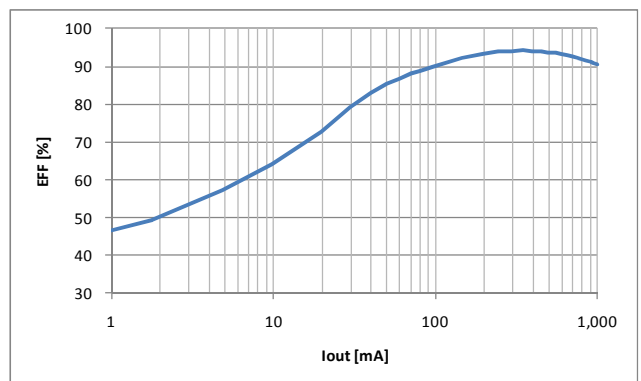


Road Regulation


Vin=3.7V, Vout=1.0V

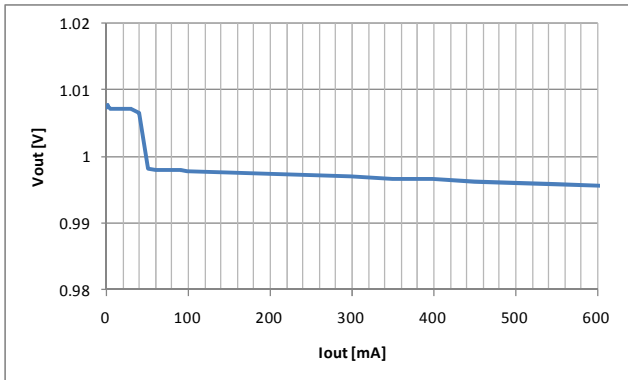


Vin=3.7V, Vout=1.2V

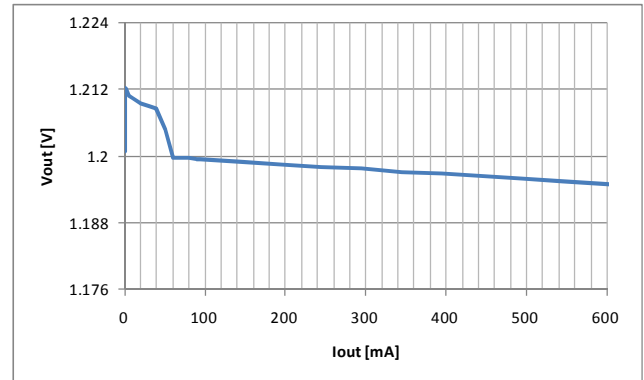


Vin=3.7V, Vout=1.5V

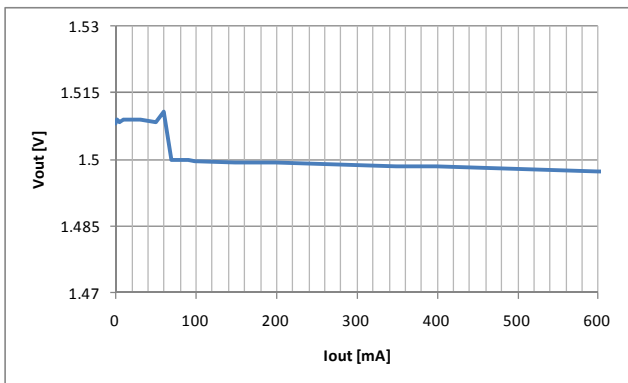


Vin=3.7V, Vout=1.8V

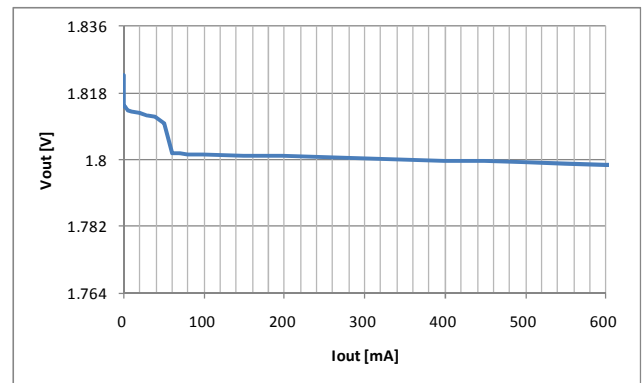

Vin=3.7V, Vout=2.5V

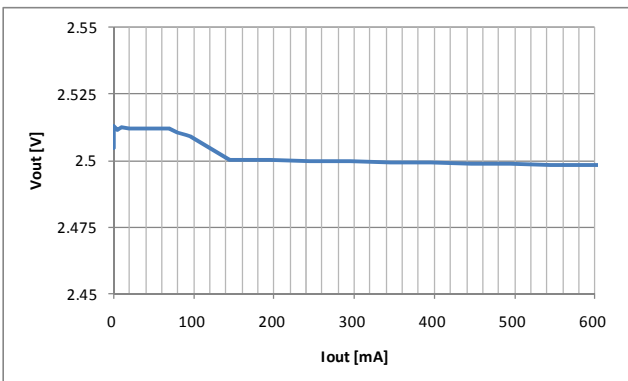


Vin=5.0V, Vout=3.3V

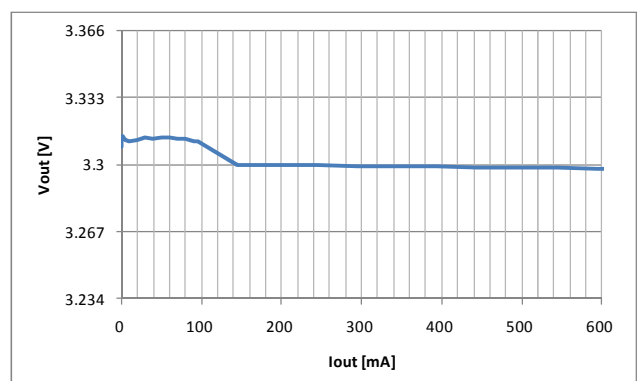


Output Ripple-Noise


$V_{in}=3.7V$, $V_{out}=1.0V$

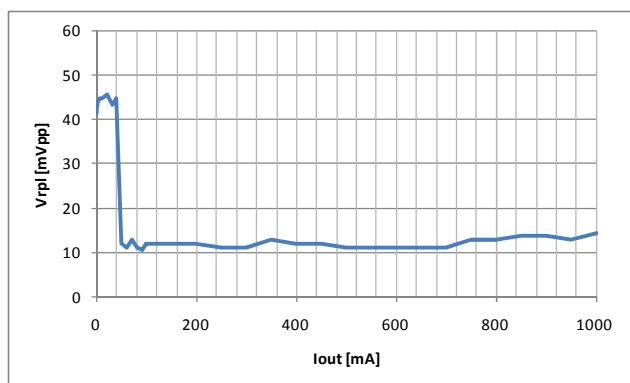


$V_{in}=3.7V$, $V_{out}=1.2V$

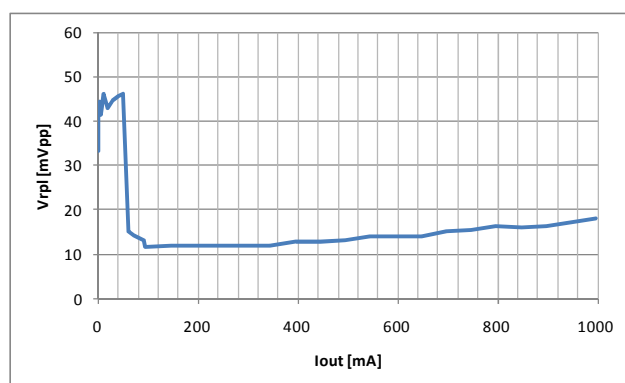


$V_{in}=3.7V$, $V_{out}=1.5V$

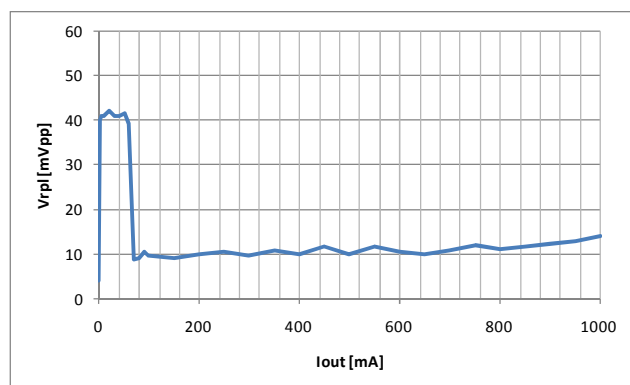


$V_{in}=3.7V$, $V_{out}=1.8V$

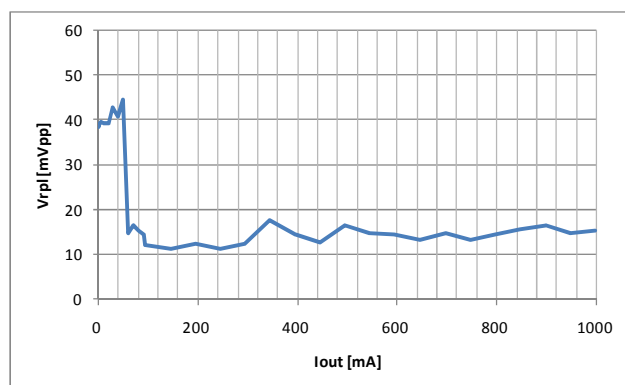

$V_{in}=3.7V$, $V_{out}=2.5V$

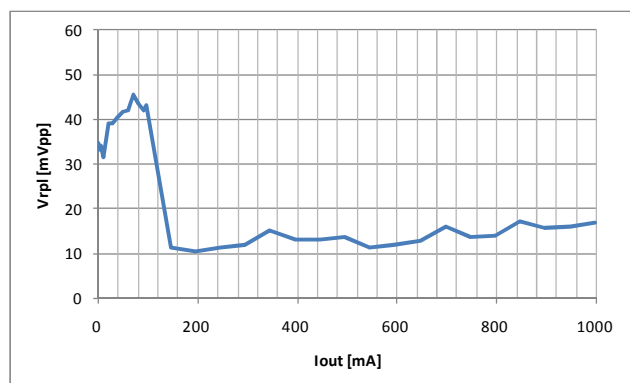

$V_{in}=5.0V$, $V_{out}=3.3V$

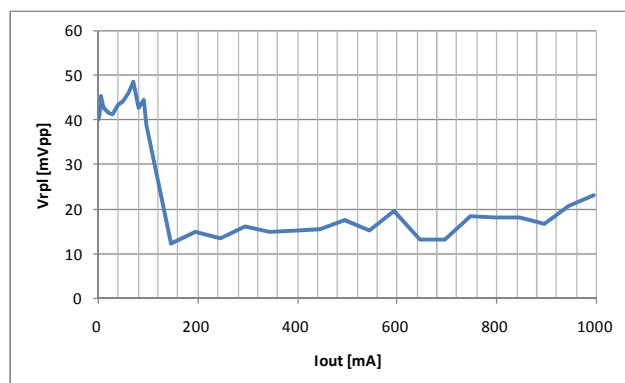

Note:

1. This datasheet's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.