


L1N4738 thru LZ1200

Surface Mount Zener Diodes

Vz Range: 8.2 to 200V Power Dissipation: 1W

Features

- Total power dissipation: max1.0W
- Low leakage current
- Moisture sensitivity: level 1, per J-STD-020
- Solder dip 260 °C, 10 s
- Low profile, typical thickness 1.0mm
- For use in stabilizing and clipping circuits with high power rating
- Zener voltage tolerance is $\pm 5\%$



Package: eSGB(SMAF)



RoHS
COMPLIANT

Absolute Maximum Ratings (T_A=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Zener Current		See Next Table	
Power Dissipation at T _A =75°C	P _{tot}	1	W
Maximum Instantaneous Forward Voltage at 200mA	V _F	1.2	V
Thermal Resistance Junction to Ambient	R _{thja}	85	°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150	°C

Note:1), The thermal resistance from junction to ambient, case or mount, mounted on P.C.B with 5×5mm copper pads, 2 OZ, FR4 PCB

Electrical Characteristics (T_A = 25 °C unless otherwise noted)

Part Number	Zener Voltage			Test Current	Dynamic Impedance	Knee Current	Knee Impedance	Reverse Current	Reverse Voltage	Max.DC Current
	V _Z /V			I _{ZT}	Z _{ZT}	I _{ZK}	Z _{ZK}	I _R (Max)	V _R	I _{ZM}
	V _Z (Min)	V _Z (Nominal)	V _Z (Max)	mA	Ω	mA	Ω	μA _{dc}	V	mA
L1N4738	7.79	8.2	8.61	31	4.5	0.5	700	10	6.5	110
L1N4739	8.65	9.1	9.56	28	5	0.5	700	10	7	100
L1N4740	9.5	10	10.5	25	7	0.25	700	10	8	91
L1N4741	10.45	11	11.55	23	8	0.25	700	5	8.4	83
L1N4742	11.4	12	12.6	21	9	0.25	700	5	9.1	76
L1N4743	12.35	13	13.65	19	10	0.25	700	5	9.9	69
L1N4744	14.25	15	15.75	17	14	0.25	700	5	11.4	61
L1N4745	15.2	16	16.8	15.5	16	0.25	700	5	12.2	57
L1N4746	17.1	18	18.9	14	20	0.25	750	5	13.7	50
L1N4747	19	20	21	12.5	22	0.25	750	5	15.2	45

L1N4738 thru LZ1200

Surface Mount Zener Diodes

V_Z Range: 8.2 to 200V Power Dissipation: 1W

Electrical Characteristics (T_A = 25 °C unless otherwise noted)

Part Number	Zener Voltage			Test Current	Dynamic Impedance	Knee Current	Knee Impedance	Reverse Current	Reverse Voltage	Max.DC Current
	V _Z /V			I _{ZT}	Z _{ZT}	I _{ZK}	Z _{ZK}	I _R (Max)	V _R	I _{ZM}
	V _Z (Min)	V _Z (Nominal)	V _Z (Max)	mA	Ω	mA	Ω	μA _{dc}	V	mA
L1N4748	20.9	22	23.1	11.5	23	0.25	750	5	16.7	41
L1N4749	22.8	24	25.2	10.5	25	0.25	750	5	18.2	38
L1N4750	25.65	27	28.35	9.5	35	0.25	750	5	20.6	34
L1N4751	28.5	30	31.5	8.5	40	0.25	1000	5	22.8	30
L1N4752	31.35	33	34.65	7.5	45	0.25	1000	5	25.1	27
L1N4753	34.2	36	37.8	7	50	0.25	1000	5	27.4	25
L1N4754	37.05	39	40.95	6.5	60	0.25	1000	5	29.7	23
L1N4755	40.85	43	45.15	6	70	0.25	1500	5	32.7	22
L1N4756	44.65	47	49.35	5.5	80	0.25	1500	5	35.8	19
L1N4757	48.45	51	53.55	5	95	0.25	1500	5	38.8	18
L1N4758	53.2	56	58.8	4.5	110	0.25	2000	5	42.6	16
L1N4759	58.9	62	65.1	4	125	0.25	2000	5	47.1	14
L1N4760	64.6	68	71.4	3.7	150	0.25	2000	5	51.7	13
L1N4761	71.25	75	78.8	3.3	175	0.25	2000	5	56	12
L1N4762	77.9	82	86.1	3	200	0.25	3000	5	62.2	11
L1N4763	86.45	91	95.6	2.8	250	0.25	3000	5	69.2	10
L1N4764	95	100	105	2.5	350	0.25	3000	5	76	9
LZ1110	104.5	110	115.5	2.3	450	0.25	4000	5	83.6	8.6
LZ1120	114	120	126	2	550	0.25	4500	5	91.2	7.8
LZ1130	123.5	130	136.5	1.9	700	0.25	5000	5	98.8	7
LZ1150	142.5	150	157.5	1.7	1000	0.25	6000	5	114	6.4
LZ1160	152	160	168	1.6	1100	0.25	6500	5	121.6	5.8
LZ1180	171	180	189	1.4	1200	0.25	7000	5	136.8	5.2
LZ1200	190	200	210	1.2	1900	0.25	9990	5	152	4.7

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

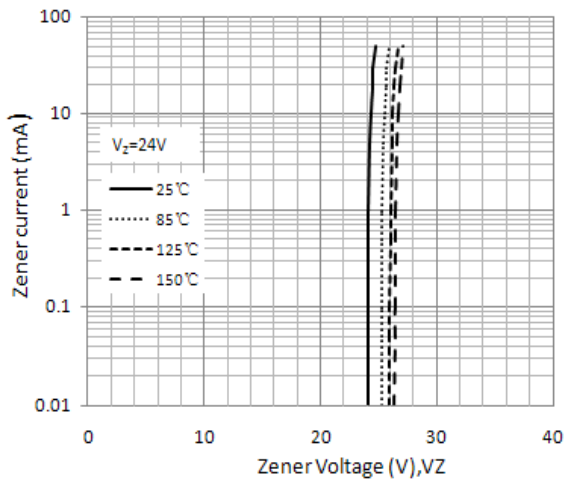


Figure 1. Typical Zener Voltage

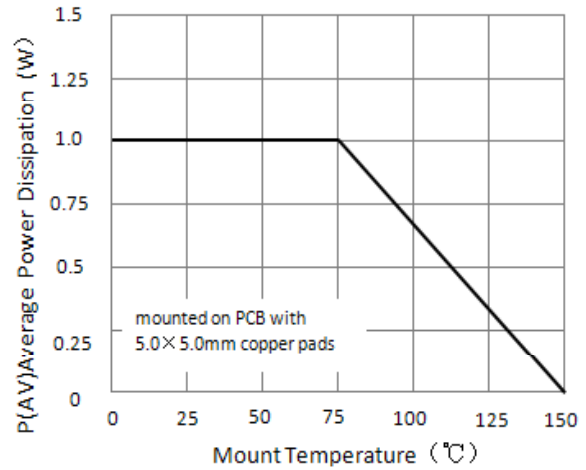


Figure 2. Steady State Power Derating

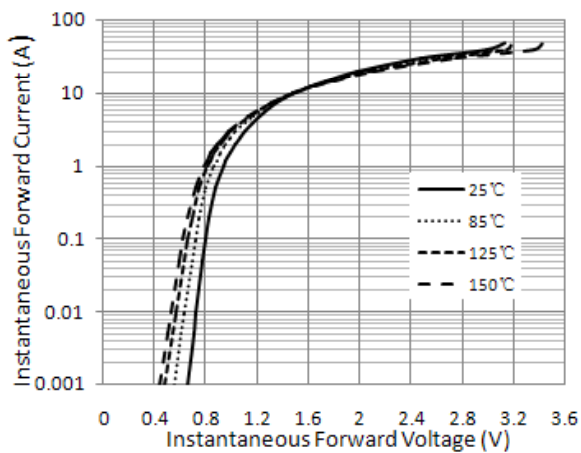


Figure 3. Typical Instantaneous Forward Characteristics

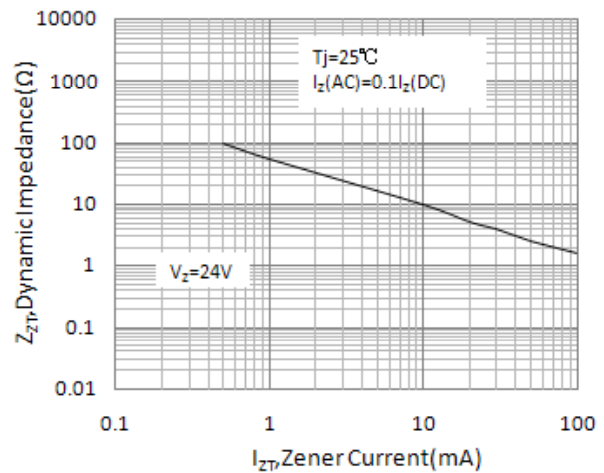


Figure 4. Typical Zener Impedance

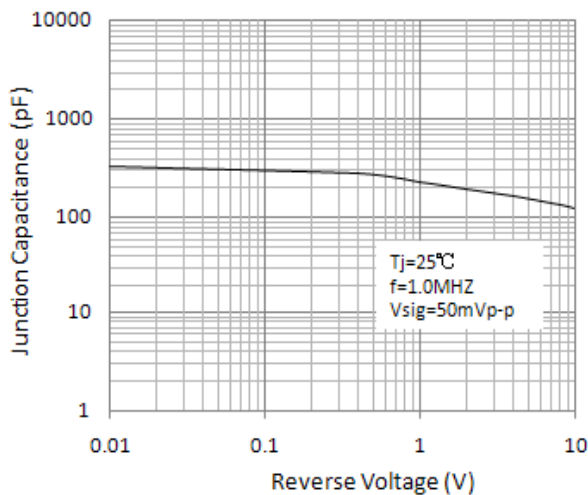


Figure 5. Typical Junction Capacitance


L1N4738 thru LZ1200

Surface Mount Zener Diodes


Vz Range: 8.2 to 200V Power Dissipation: 1W

Package Outline Dimensions



eSGB(SMAF)

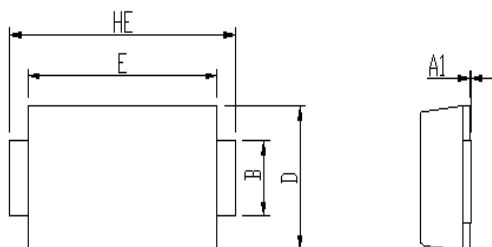

DIM	Unit: mm		Unit: inch	
	MIN	MAX	MIN	MAX
A	0.9	1.08	0.035	0.043
A1	0	0.1	0.000	0.004
B	1.25	1.45	0.049	0.057
C	0.1	0.25	0.004	0.010
D	2.6	2.8	0.102	0.110
E	4.1	4.3	0.161	0.169
L	0.7	1.1	0.028	0.043
HE	4.8	5.2	0.189	0.205



Soldering footprint

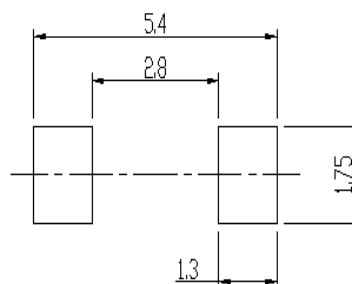

Packing Information

Packing Quantities:

Reel size	Quantity/reel	Quantity/inner Box	Quantity/Carlton
7"	3K	21K	84K
13"	10K	20K	180K

Tape & Reel Specification:

