


■ Outline

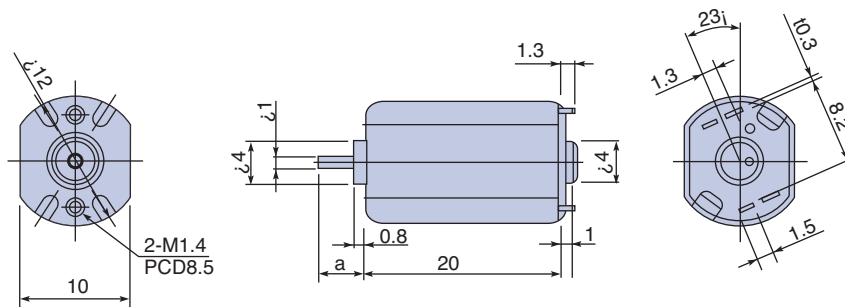

UNIT: mm

DC

■ Specifications

Model	Operating Voltage (V)	Rated Voltage (V)	No Load Speed (r/min)	No Load Current (mA)	Rated Load		Rated Load Speed (r/min)	Rated Current (mA)	Starting Torque		Shaft Length (mm)
					(gf·cm)	(mN·m)			(gf·cm)	(mN·m)	
M1N10FB08G	1.5 to 8.0	5	8530	15	3	0.294	6500	72	12.6	1.235	a= 8.5
M1N10FB09F	1.5 to 6.0	5	10820	20	3	0.294	8760	92	15.7	1.539	a= 6.5
M1N10FB10G	1.0 to 5.0	5	13270	30	3	0.294	11220	119	19.4	1.901	a= 8.5
M1N10FB95G	0.5 to 5.0	2	4030	15	2	0.196	3010	60	7.9	0.775	a= 8.5

■ Characteristics

