

## 6-UNIT 150mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

**DESCRIPTION**

M54527P is six-circuit Darlington transistor arrays with clamping diodes. The circuits are made of NPN transistors. Both the semiconductor integrated circuits perform high-current driving with extremely low input-current supply.

**FEATURES**

- High breakdown voltage ( $BV_{CEO} \geq 40V$ )
- High-current driving ( $I_c(\max) = 150mA$ )
- With clamping diodes
- Driving available with PMOS IC output of 8-18V
- Wide input voltage range ( $V_i = -40$  to  $+40V$ )
- Wide operating temperature range ( $T_a = -20$  to  $+75^{\circ}C$ )


**APPLICATION**

Drives of relays and printers, digit drives of indication elements (LEDs and lamps), and MOS-bipolar logic IC interfaces


**FUNCTION**

The M54527P have six circuits consisting of NPN Darlington transistors. These ICs have resistance of  $20k\Omega$  between input transistor bases and input pins. A spike-killer clamping diode is provided between each output pin (collector) and COM pin (pin 8). The output transistor emitters are all connected to the GND pin (pin 7).

The collector current is 150mA maximum. Collector-emitter supply voltage is 40V maximum.

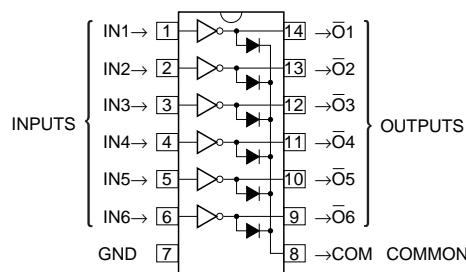**PIN CONFIGURATION (TOP VIEW)**

Outline 14P4

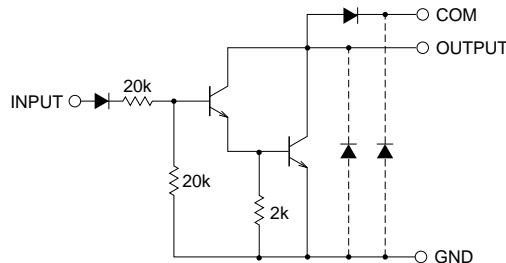**CIRCUIT SCHEMATIC**

The six circuits share the COM and GND.

The diodes shown by broken line are parasite diodes and must not be used.

Unit :  $\Omega$

**ABSOLUTE MAXIMUM RATINGS (Unless otherwise noted,  $T_a = -20 \sim +75^{\circ}C$ )**

Symbol	Parameter	Conditions	Ratings	Unit
$V_{CEO}$	Collector-emitter voltage	Output, H	-0.5 ~ +40	V
$I_C$	Collector current	Current per circuit output, L	150	mA
$V_i$	Input voltage		-40 ~ +40	V
$I_F$	Clamping diode forward current		150	mA
$V_R$	Clamping diode reverse voltage		40	V
$P_d$	Power dissipation	$T_a = 25^{\circ}C$ , when mounted on board	1.47	W
$T_{opr}$	Operating temperature		-20 ~ +75	$^{\circ}C$
$T_{stg}$	Storage temperature		-55 ~ +125	$^{\circ}C$

Aug. 1999

## 6-UNIT 150mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

RECOMMENDED OPERATING CONDITIONS (unless otherwise noted,  $T_a = -20 \sim +75^\circ\text{C}$ )

Symbol	Parameter	Limits			Unit
		min	typ	max	
$V_o$	Output voltage	0	—	40	V
$I_c$	Collector current per channel	Percent duty cycle less than 50 %	0	—	150 mA
$V_{IH}$	"H" input voltage	7	—	35	V
$V_{IL}$	"L" input voltage	0	—	1	V

ELECTRICAL CHARACTERISTICS (Unless otherwise noted,  $T_a = -20 \sim +75^\circ\text{C}$ )


Symbol	Parameter	Test conditions	Limits			Unit
			min	typ*	max	
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_{CEO} = 100\mu\text{A}$	40	—	—	V
$V_{CE(sat)}$	Collector-emitter saturation voltage	$V_I = 7\text{V}, I_c = 150\text{mA}$	—	1.1	1.7	V
		$V_I = 7\text{V}, I_c = 100\text{mA}$	—	1.0	1.4	
$I_I$	Input current	$V_I = 18\text{V}$	—	0.9	1.8	mA
		$V_I = 35\text{V}$	—	1.9	5.0	
$I_{IR}$	Input reverse current	$V_I = -35\text{V}$	—	—	-20	$\mu\text{A}$
$V_F$	Clamping diode forward voltage	$I_F = 150\text{mA}$	—	1.15	1.6	V
$I_R$	Clamping diode reverse current	$V_R = 40\text{V}$	—	—	100	$\mu\text{A}$
$h_{FE}$	DC amplification factor	$V_{CE} = 4\text{V}, I_c = 150\text{mA}, T_a = 25^\circ\text{C}$	800	2500	—	—

\* : The typical values are those measured under ambient temperature ( $T_a$ ) of  $25^\circ\text{C}$ . There is no guarantee that these values are obtained under any conditions.


SWITCHING CHARACTERISTICS (Unless otherwise noted,  $T_a = 25^\circ\text{C}$ )

Symbol	Parameter	Test conditions	Limits			Unit
			min	typ	max	
$t_{on}$	Turn-on time	$C_L = 15\text{pF}$ (note 1)	—	35	—	ns
$t_{off}$	Turn-off time		—	300	—	ns

## NOTE 1 TEST CIRCUIT

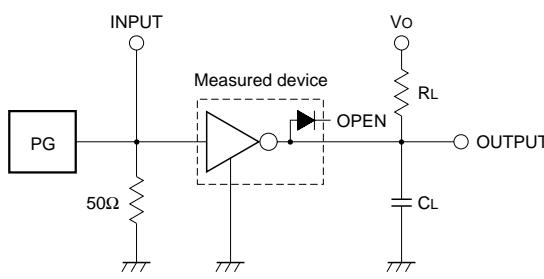







## TIMING DIAGRAM

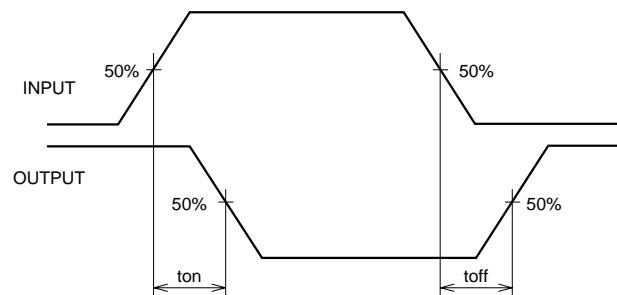

- (1) Pulse generator (PG) characteristics : PRR = 1kHz,  $t_w = 10\mu\text{s}$ ,  $t_r = 6\text{ns}$ ,  $t_f = 6\text{ns}$ ,  $Z_0 = 50\Omega$ ,  $V_P = 7\text{Vp-p}$
- (2) Input-output conditions :  $R_L = 67.5\Omega$ ,  $V_o = 10\text{V}$
- (3) Electrostatic capacity  $C_L$  includes floating capacitance at connections and input capacitance at probes

## 6-UNIT 150mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE


## TYPICAL CHARACTERISTICS

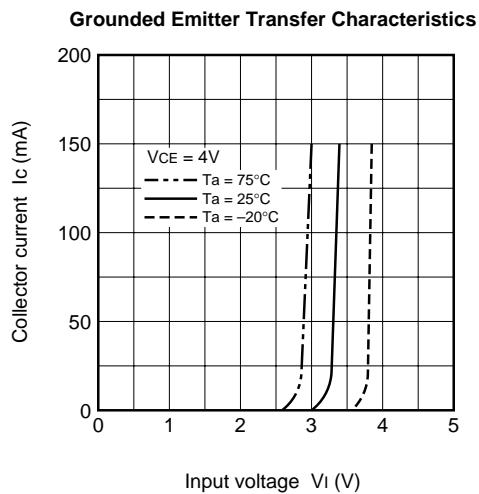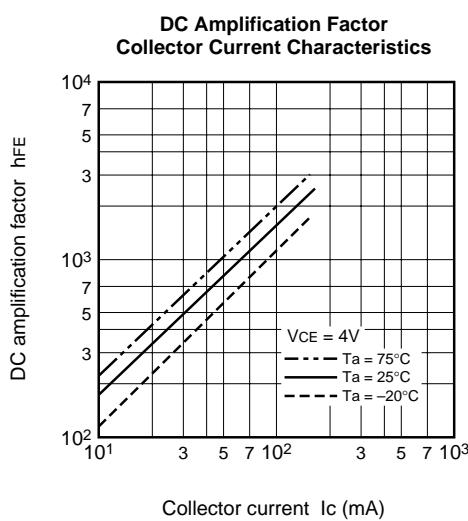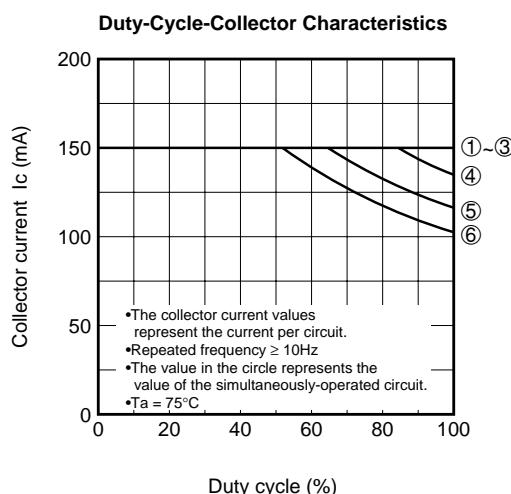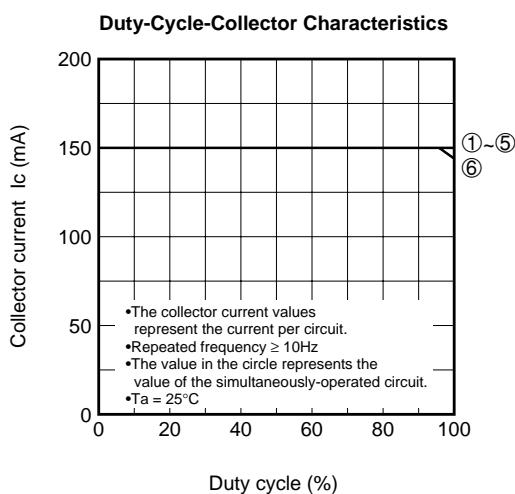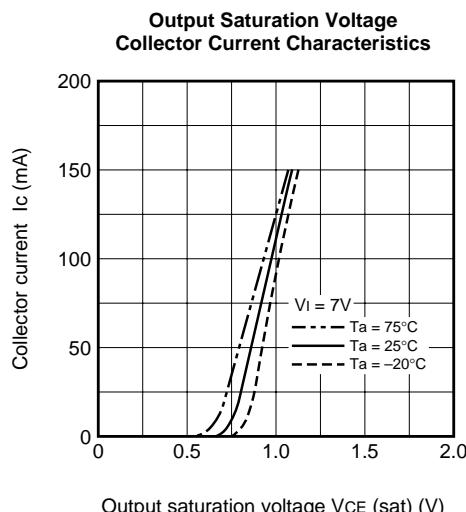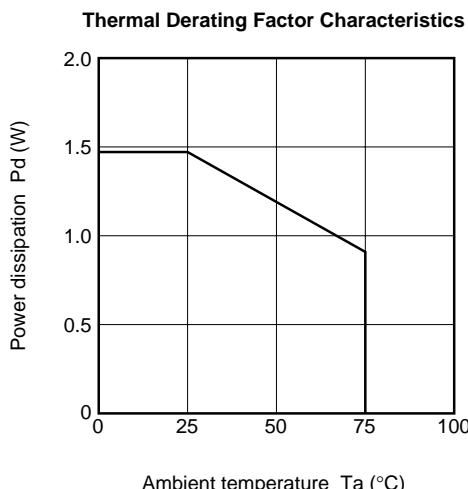

---

6-UNIT 150mA DARLINGTON TRANSISTOR ARRAY WITH CLAMP DIODE

---

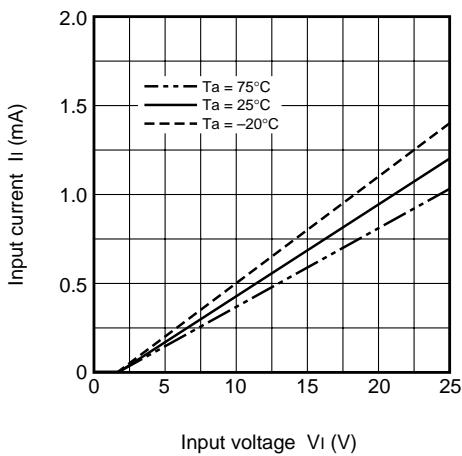**Input Characteristics****Clamping Diode Characteristics**