


M57788MR


430-450MHz, 12.5V, 45W, FM MOBILE RADIO

OUTLINE DRAWING

Dimensions in mm

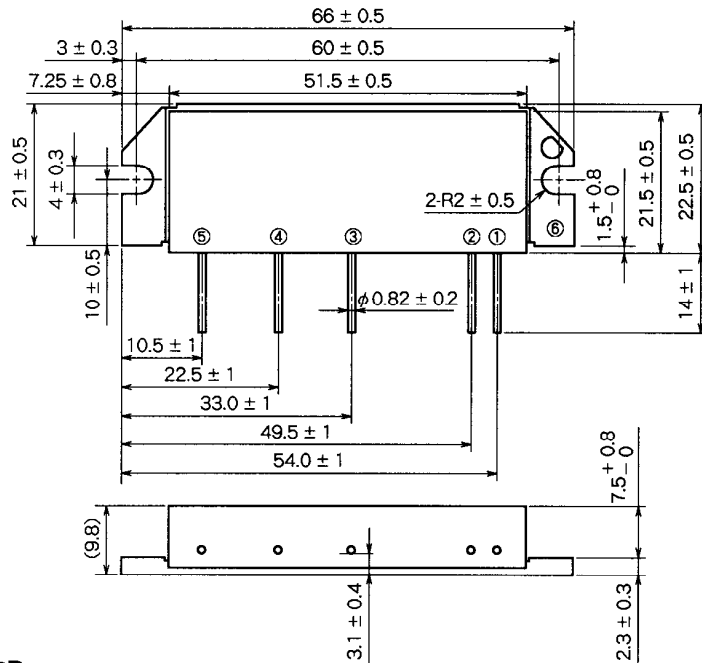

BLOCK DIAGRAM

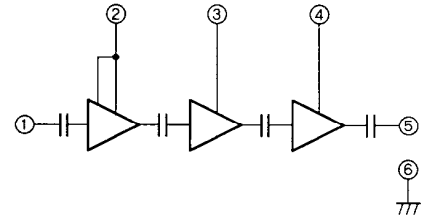

PIN :

- ①Pin : RF INPUT
- ②Vcc1 : 1st. DC SUPPLY
- ③Vcc2 : 2nd. DC SUPPLY
- ④Vcc3 : 3rd. DC SUPPLY
- ⑤Po : RF OUTPUT
- ⑥GND : FIN

ABSOLUTE MAXIMUM RATINGS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V _{cc}	Supply voltage		17	V
I _{cc}	Total current		12	A
P _{in(max)}	Input power	Z _G = Z _L = 50 Ω	0.8	W
P _{o(max)}	Output power	Z _G = Z _L = 50 Ω	50	W
T _{c(OP)}	Operation case temperature		- 30 to 110	°C
T _{stg}	Storage temperature		- 40 to 110	°C

Note. Above parameters are guaranteed independently.


ELECTRICAL CHARACTERISTICS (T_c = 25 °C unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range	P _{in} = 0.4W V _{cc} = 13.5V Z _G = Z _L = 50 Ω	430	450	MHz
P _o	Output power		45		W
η _T	Total efficiency		40		%
2f _o	2nd. harmonic			- 30	dBc
3f _o	3rd. harmonic			- 30	dBc
ρ _{in}	Input VSWR			2.8	-
-	Load VSWR tolerance	V _{cc} = 15.2V, P _o = 45W (P _{in} : controlled) Load VSWR=8.8:1 (All phase), Z _G = 50 Ω	No degradation or destroy		-


Note. Above parameters, ratings, limits and conditions are subject to change.

TYPICAL PERFORMANCE DATA


OUTPUT POWER, TOTAL EFFICIENCY,
INPUT VSWR VS. FREQUENCY CHARACTERISTICS

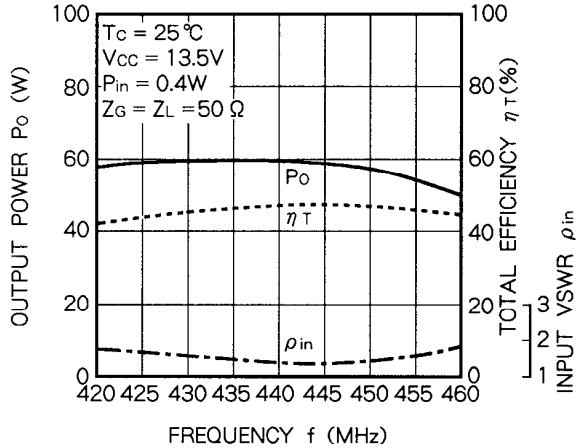


OUTPUT POWER, EACH CURRENT
VS. INPUT POWER CHARACTERISTICS

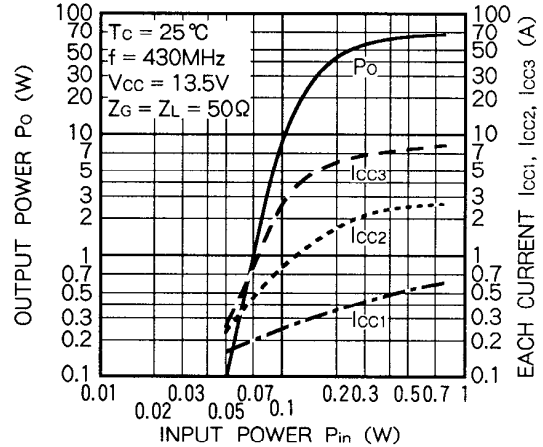


OUTPUT POWER, EACH CURRENT
VS. INPUT POWER CHARACTERISTICS

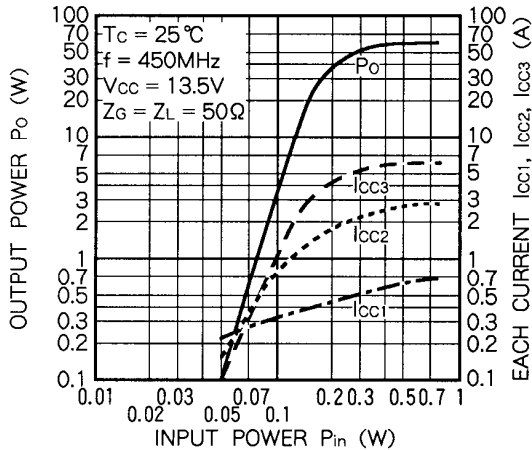

OUTPUT POWER, EACH CURRENT VS.
1st SUPPLY VOLTAGE CHARACTERISTICS

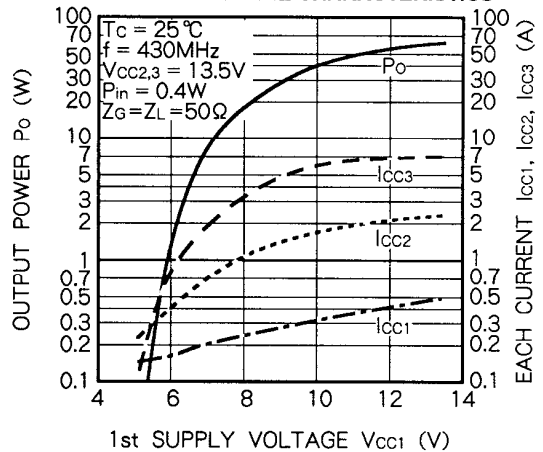

OUTPUT POWER, EACH CURRENT VS.
1st SUPPLY VOLTAGE CHARACTERISTICS

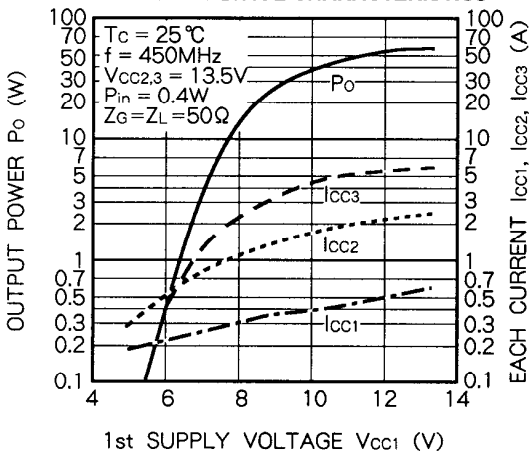

OUTPUT POWER, EACH CURRENT
VS. SUPPLY VOLTAGE CHARACTERISTICS

