

# SHINDENGEN

## Power Switching Regulators


MA4000 Series

**MA4810**

### OUTLINE DIMENSIONS

Case : MA7

Unit : mm

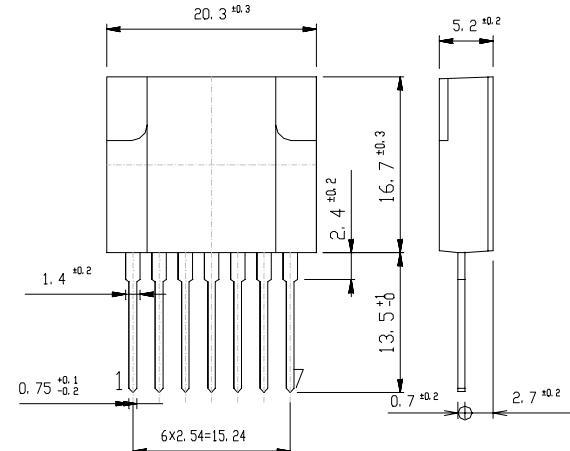

### RATINGS

#### ● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T <sub>stg</sub>		-30~125	°C
Operating Temperature	T <sub>op</sub>		-20~125	°C
Junction Temperature	T <sub>j</sub>		150	°C
Peak Input Voltage	V <sub>in</sub>	(2)+,(3)-,(5)-	800	V
		DC (2)+,(3)-	3	A
Input Current	I <sub>in</sub>	Pulse (2)+,(3)- Duty1/2	6	A
Maximum Power Dissipation	P <sub>D</sub>	T <sub>a</sub> =25°C	3	W
	P <sub>D</sub>	Heatsink T <sub>c</sub> =100°C	17	W
Dielectric Strength	V <sub>dis</sub>	Terminals To Case AC 1 min	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	MΩ
Max Voltage (4) to (6)	V(4)·(6)	(4)+,(6)-	6	V
Max Current (6) to (4)	I(6)·(4)	(6)+,(4)- (Peak) Duty Max 1/2	200	mA
Reverse Current	I <sub>Z</sub>	(5)+,(4)-	MAX 20	mA

#### ● Electrical Characteristics (T<sub>c</sub>=25°C)

Item	Symbol	Conditions	Ratings	Unit
Q1	I <sub>DSS</sub>	V <sub>DS</sub> =800V, V <sub>GS</sub> =0V,(2)+,(3)-	MAX 250	μA
	R <sub>DS(on)</sub>		TYP (4.1)	Ω
		I <sub>D</sub> =1.5A, (2)+,(3)- V <sub>GS</sub> =10V,(5)+,(3)-	MAX 5.0	Ω
D1	θ <sub>jc</sub>	Junction to Case	MAX 2.9	°C/W
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =800V, (1)+,(2)-	MAX 10	μA
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =0.6A, (2)+,(1)-	MAX 1.7	V
Q2		(3)+(4)-	TYP 0.7	V

## ● Standard Operating Condition・Design Standard For Application Circuit

Item	Conditions	Ratings	Unit
Input Rated Voltage		AC90～276	V
Output Nominal Voltage		12	V
Output Nominal Current		2.5	A

## ● Standard Operating Condition・Standard Operating Characteristics (Ta=25°C)

Item	Conditions	Ratings	Unit	
Minimum Input Full Load Output Voltage	$V_{in}=90V, I_O=2.5A$	$12.0 \pm 0.6$	V	Fig 1, ① Refer
Maximum Input Light Load Output Voltage	$V_{in}=276V, I_O=0.25A$	$12.0 \pm 0.6$	V	Fig 1, ② Refer
Over Current Protection	Foldback Current	MAX 3.8	A	Fig 1, ③ Refer
	Short Circuit	Vin=276V, $R_O=0.5\Omega$	Nodamage To Any Device, Automatic Recovery.	- Fig 1, ④ Refer

Figure in ○=Terminal Sign


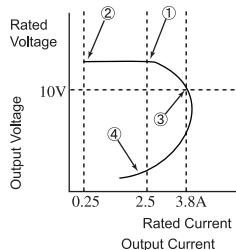



Fig1. Output Voltage/Current

# MA4810


## Transfer Characteristics

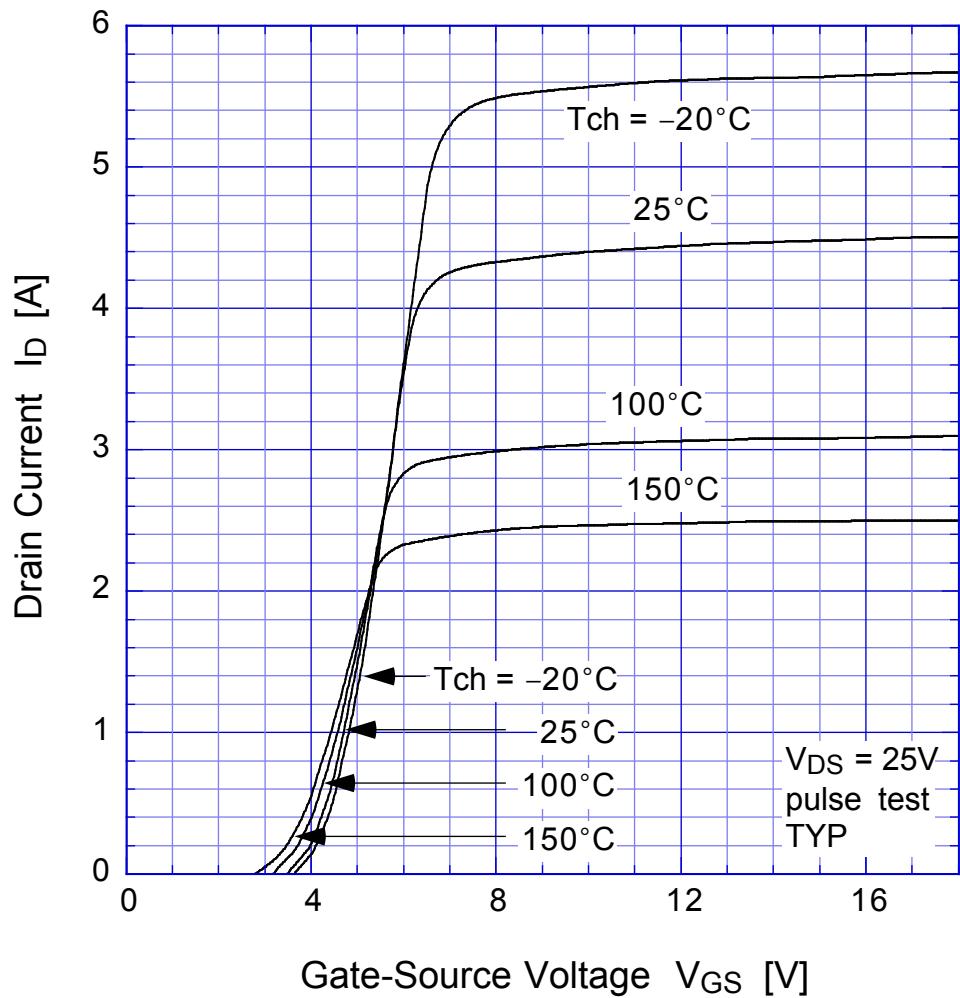

## MA4810 Static Drain-Source On-state Resistance

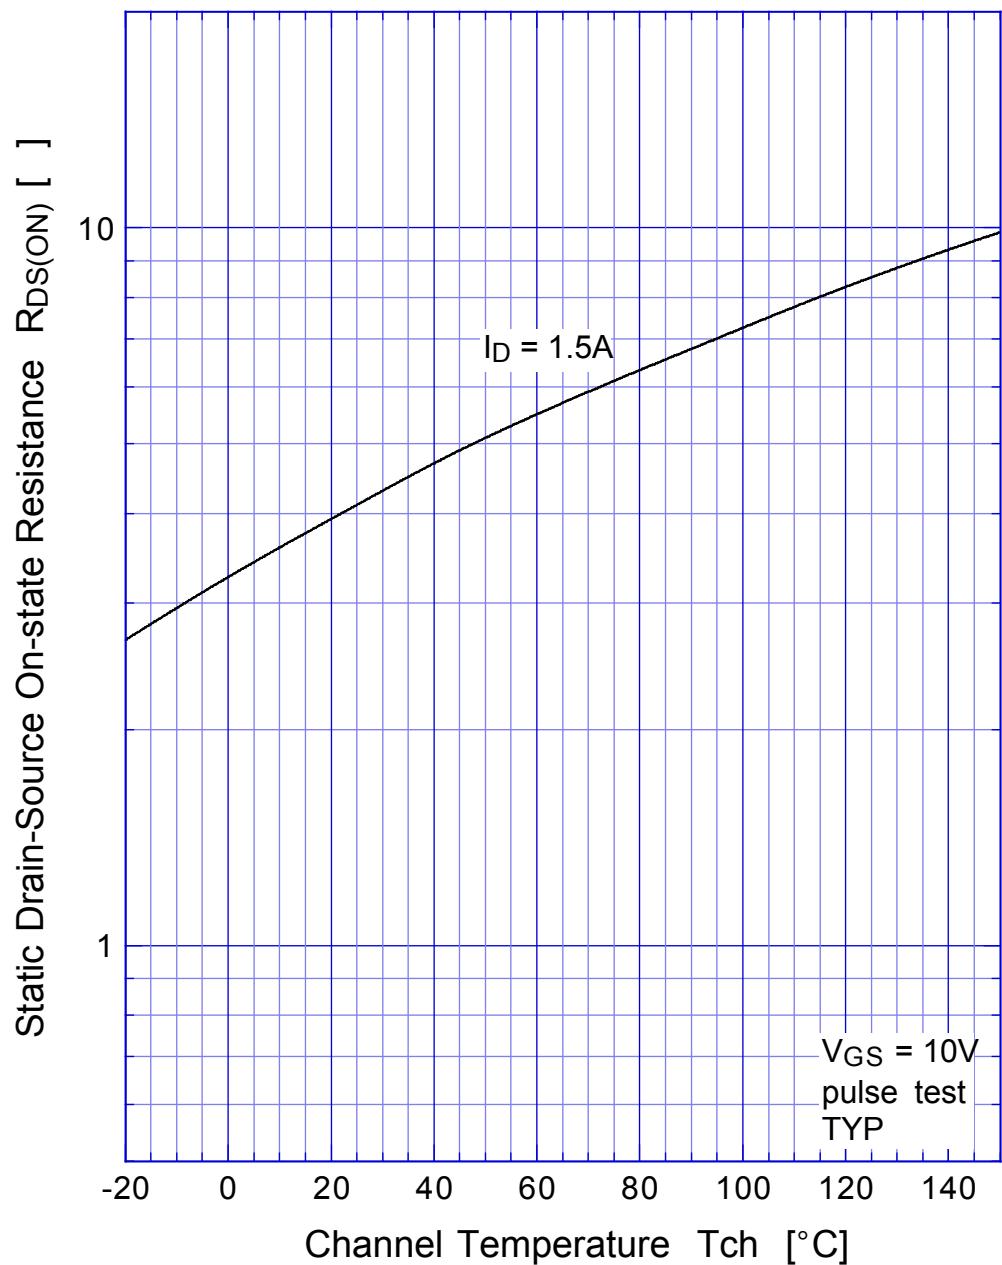


## MA4810 Gate Threshold Voltage

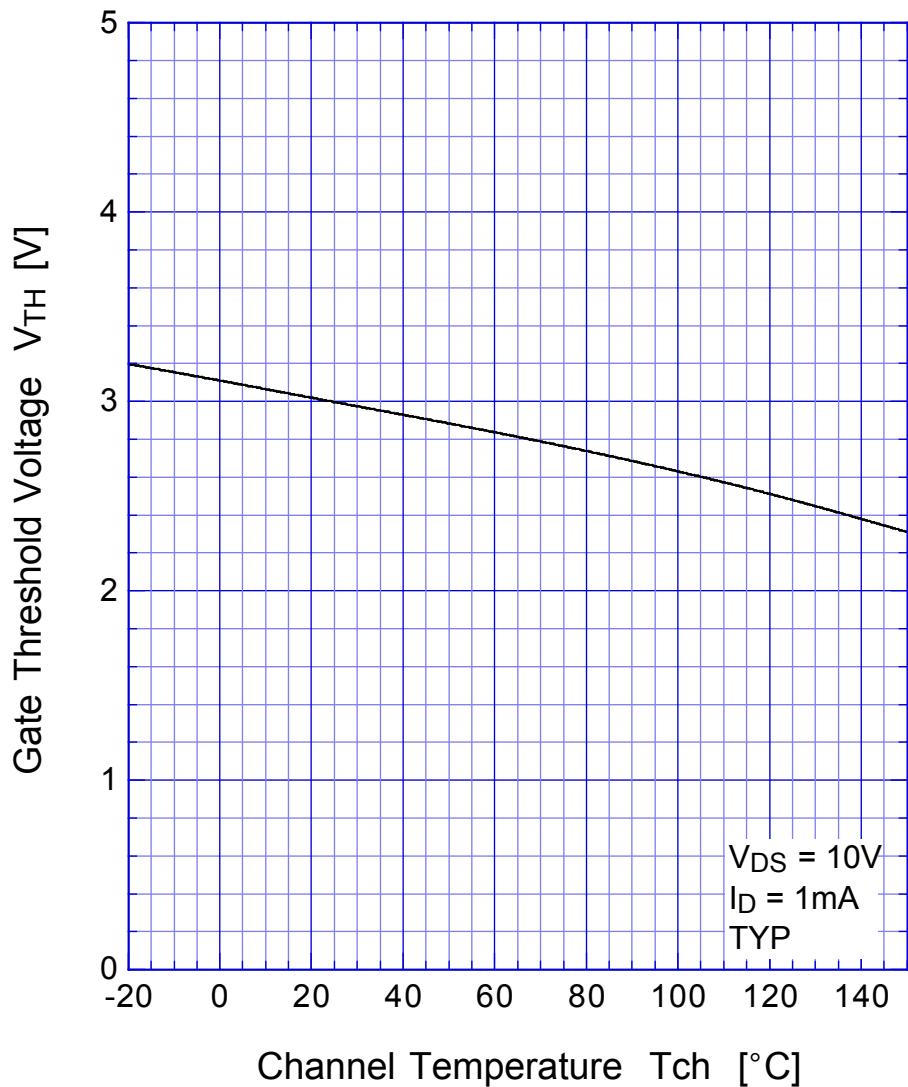


MA4810

Capacitance

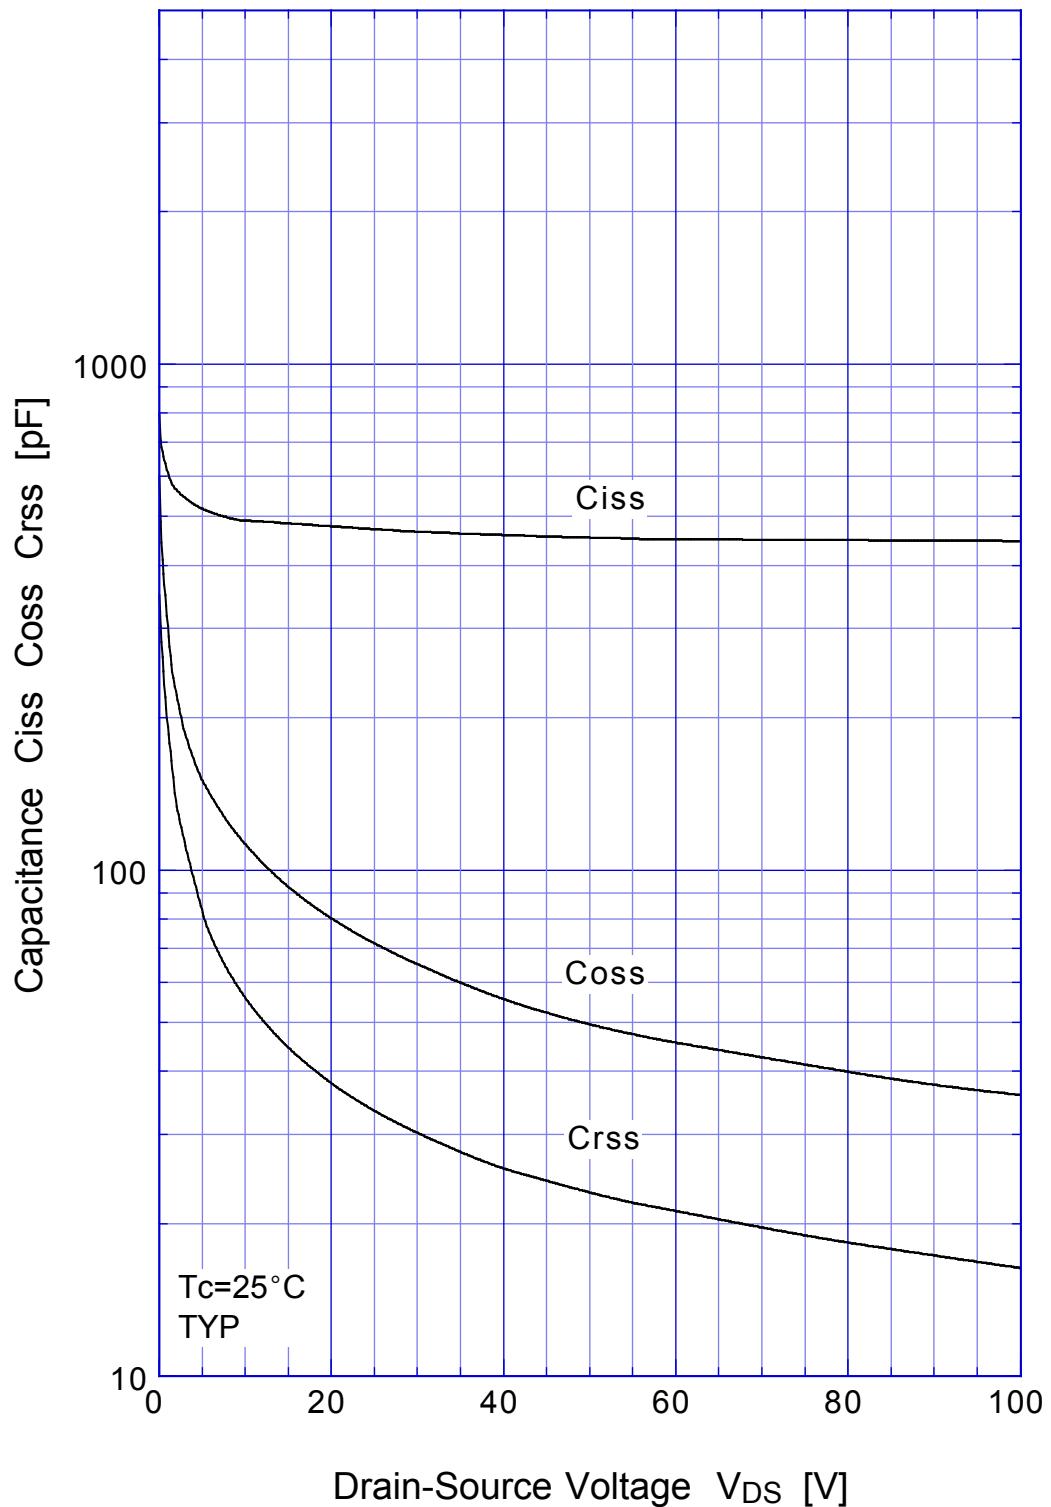


# MA4810 Transient Thermal Impedance

---

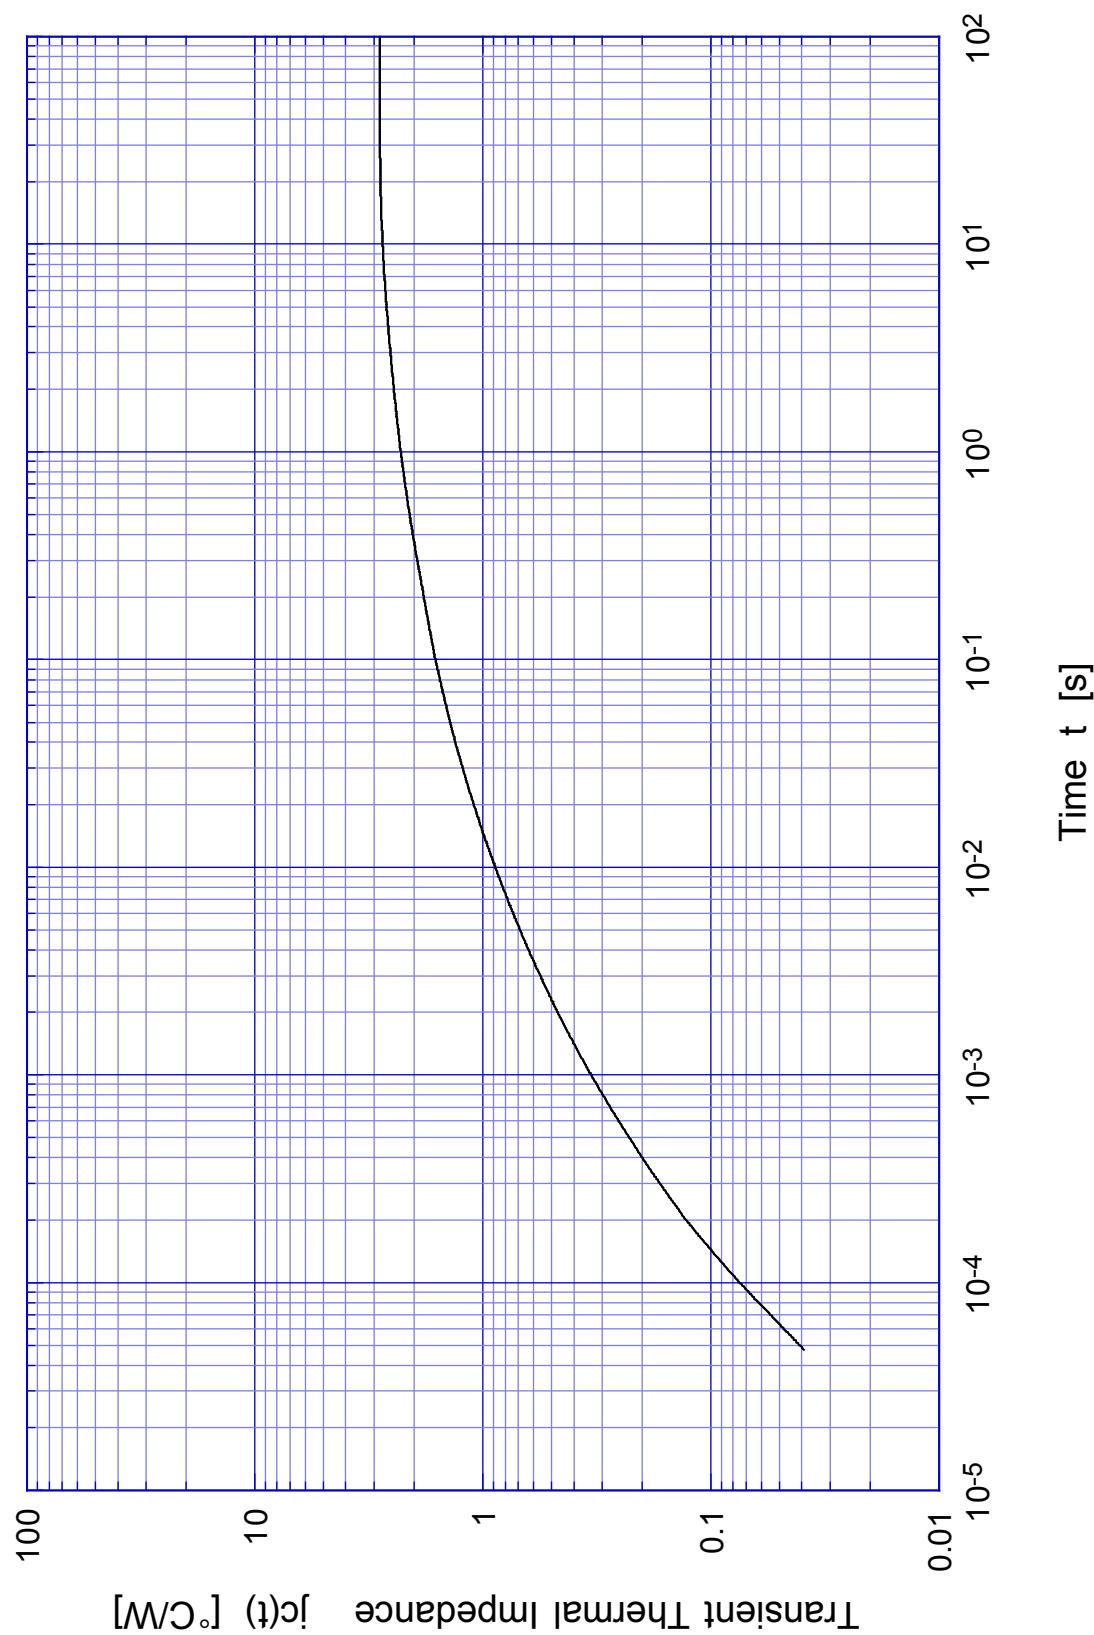

## MA4810 Safe Operating Area

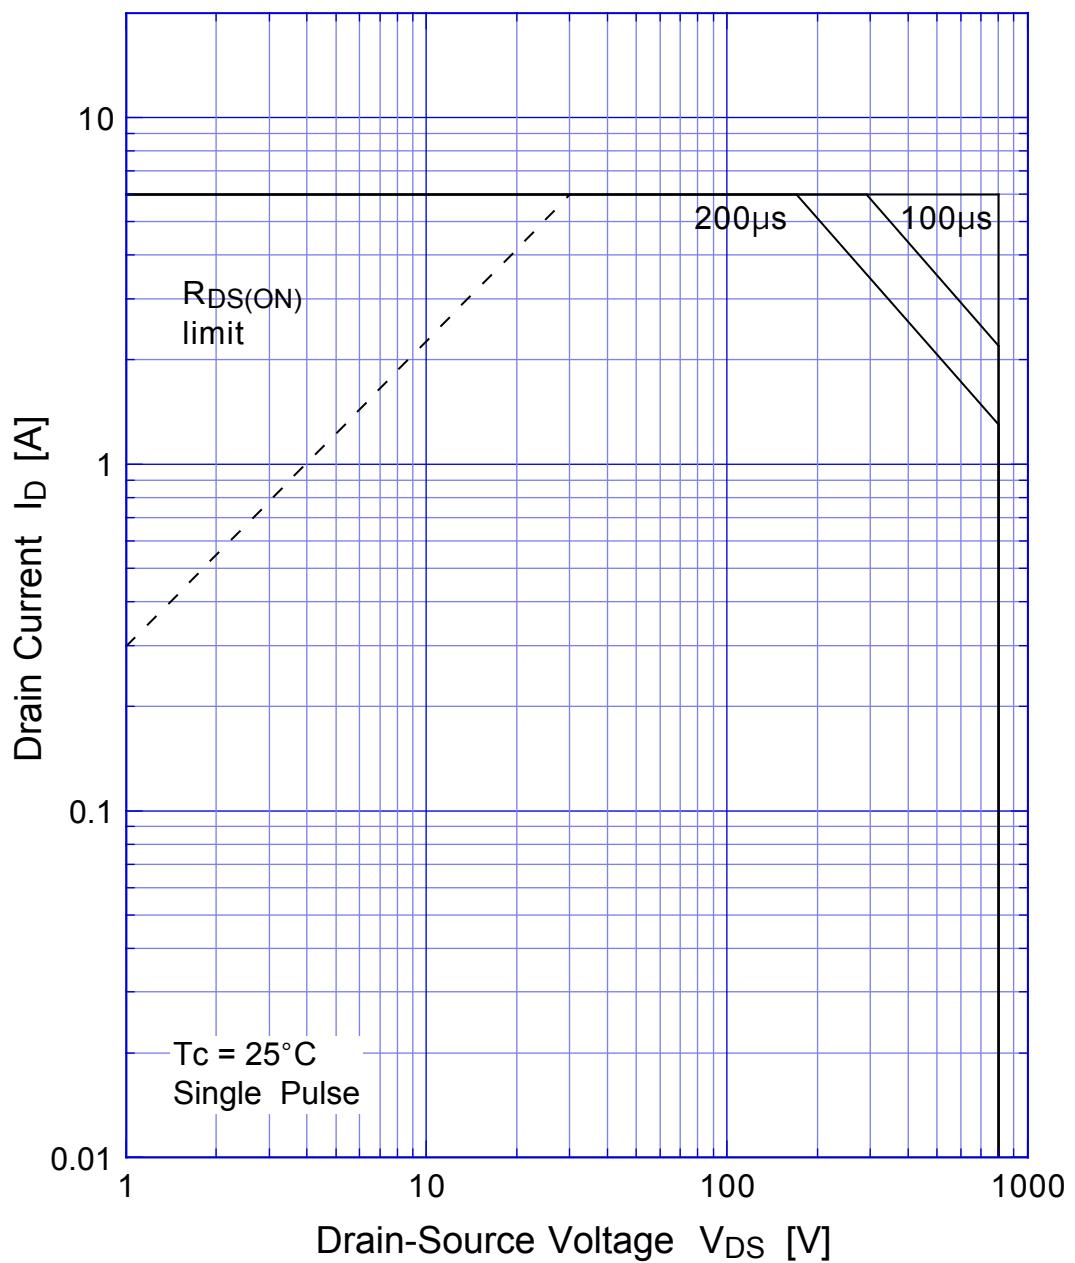

**MA4810**

Power Derating

