

SHINDENGEN

Power Switching Regulators


MA4000 Series

MA4820

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

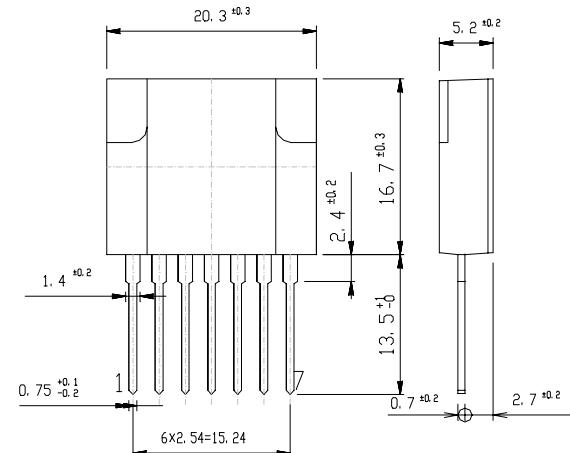

RATINGS

● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-30~125	°C
Operating Temperature	Top		-20~125	°C
Junction Temperature	Tj		150	°C
Peak Input Voltage	Vin	(2)+,(3)-,(5)-	800	V
		DC (2)+,(3)-	5	A
Input Current	Iin	Pulse (2)+,(3)- Duty1/2	10	A
Maximum Power Dissipation	P _D	Ta=25°C	3	W
	P _D	Heatsink Tc=100°C	21	W
Dielectric Strength	Vdis	Terminals To Case AC 1 min	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	MΩ
Max Voltage (4) to (6)	V(4)•(6)	(4)+,(6)-	6	V
Max Current (6) to (4)	I(6)•(4)	(6)+,(4)- (Peak) Duty Max 1/2	200	mA
Reverse Current	I _Z	(5)+,(4)-	MAX 20	mA

● Electrical Characteristics (Tc=25°C)

Item	Symbol	Conditions	Ratings	Unit
Q1	I _{DSS}	V _{DS} =800V, V _{GS} =0V,(2)+,(3)-	MAX 250	μA
	R _{DSS(on)}	I _D =2.5A, (2)+,(3)- V _{GS} =10V,(5)+,(3)-	TYP (2.1)	Ω
	θ _{jc}	Junction to Case	MAX 3.0	Ω
D1	I _R	V _G =800V, (1)+,(2)-	MAX 2.3	°C/W
	V _F	I _F =0.6A, (2)+,(1)-	MAX 10	μA
Q2		(3)+,(4)-	MAX 1.7	V
			TYP 0.7	V

● Standard Operating Condition·Design Standard For Application Circuit

Item	Conditions	Ratings	Unit
Input Rated Voltage		AC90~276	V
Output Nominal Voltage		12	V
Output Nominal Current		4	A

● Standard Operating Condition·Standard Operating Characteristics (Ta=25°C)

Item	Conditions	Ratings	Unit	
Minimum Input Full Load Output Voltage	Vin=90V, I _O =4.0A	12.0±0.6	V	Fig 1, ① Refer
Maximum Input Light Load Output Voltage	Vin=276V, I _O =0.40A	12.0±0.6	V	Fig 1, ② Refer
Over Current Protection	Foldback Current	MAX 6.0	A	Fig 1, ③ Refer
	Short Circuit	Nodamage To Any Device, Automatic Recovery.	-	Fig 1, ④ Refer

Figure in ○=Terminal Sign


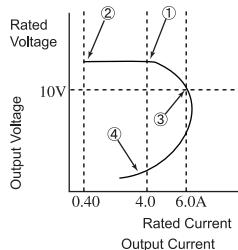



Fig1. Output Voltage/Current

MA4820


Transfer Characteristics

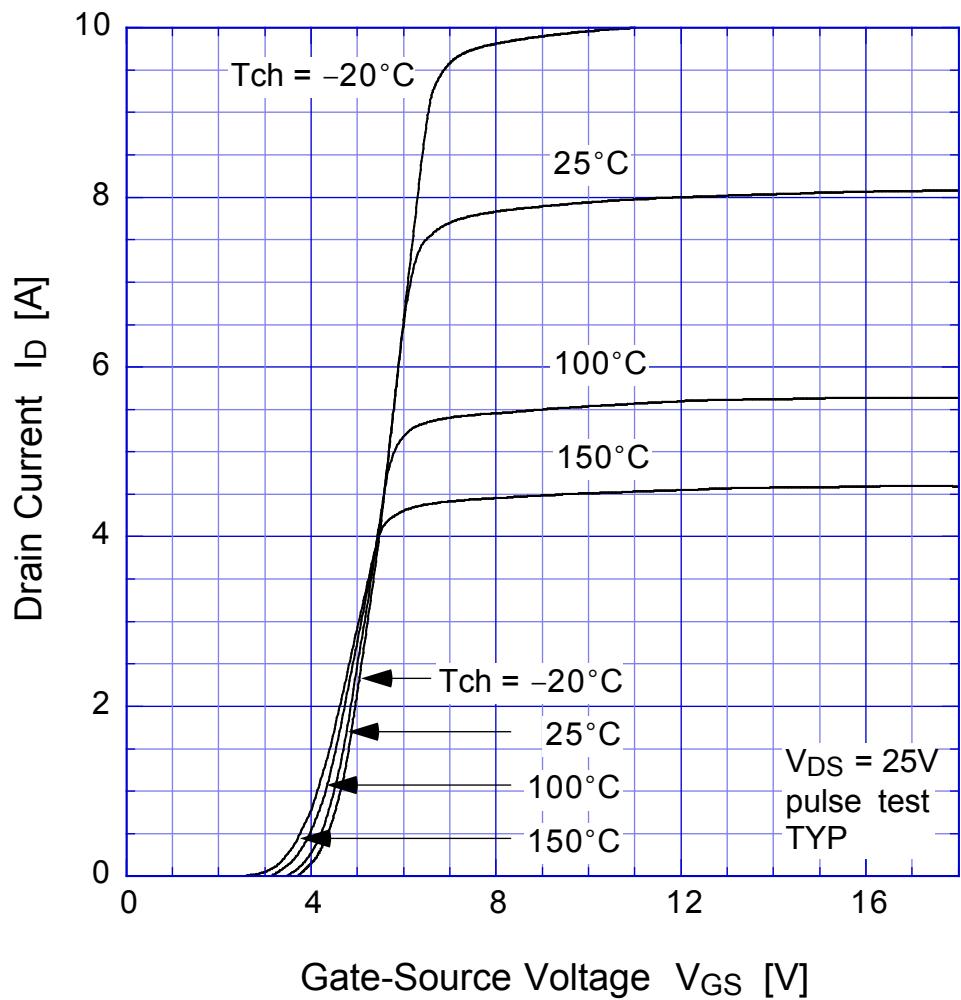

MA4820 Static Drain-Source On-state Resistance

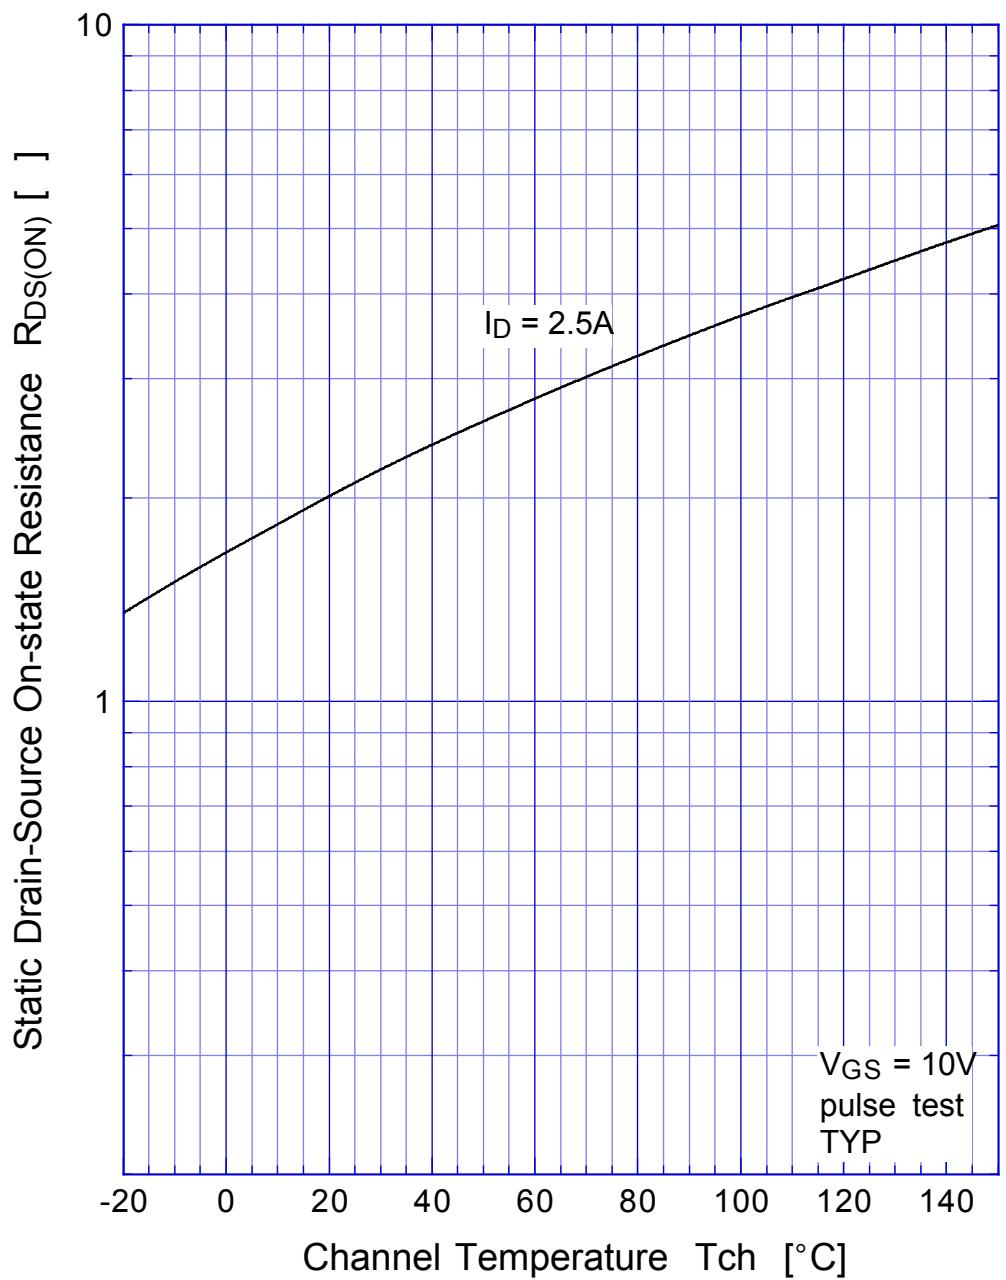


MA4820 Gate Threshold Voltage

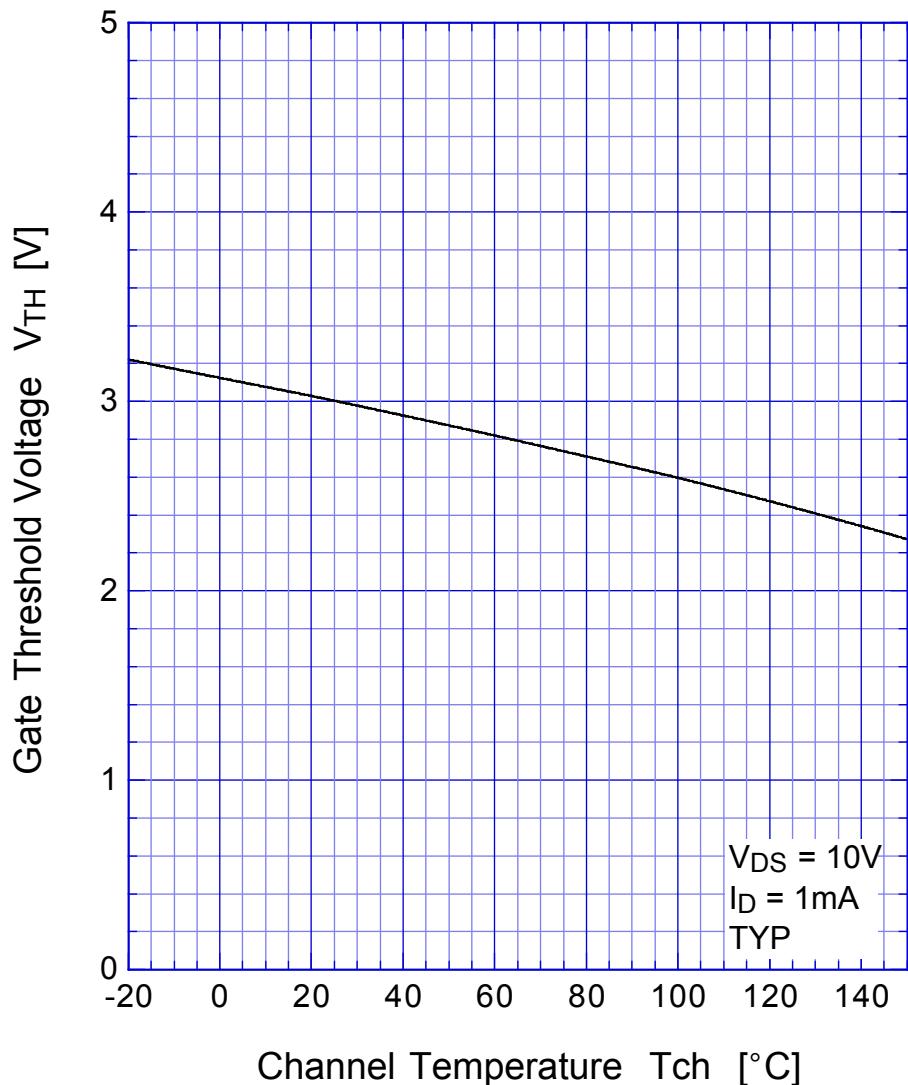


MA4820

Capacitance

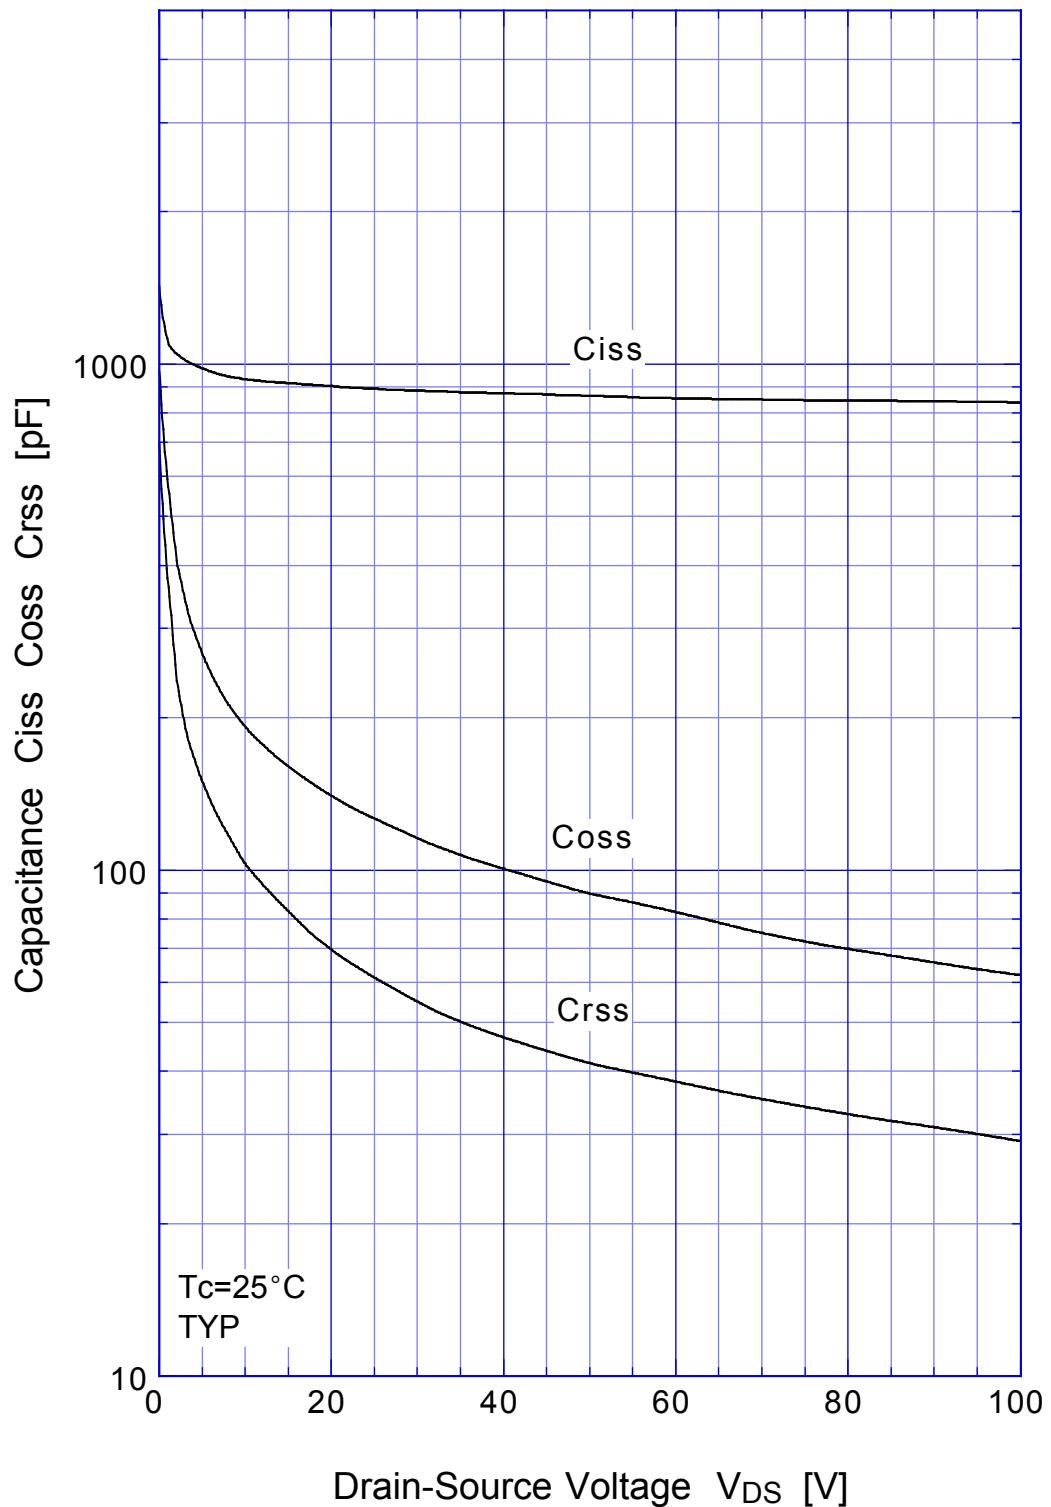

MA4820 Transient Thermal Impedance

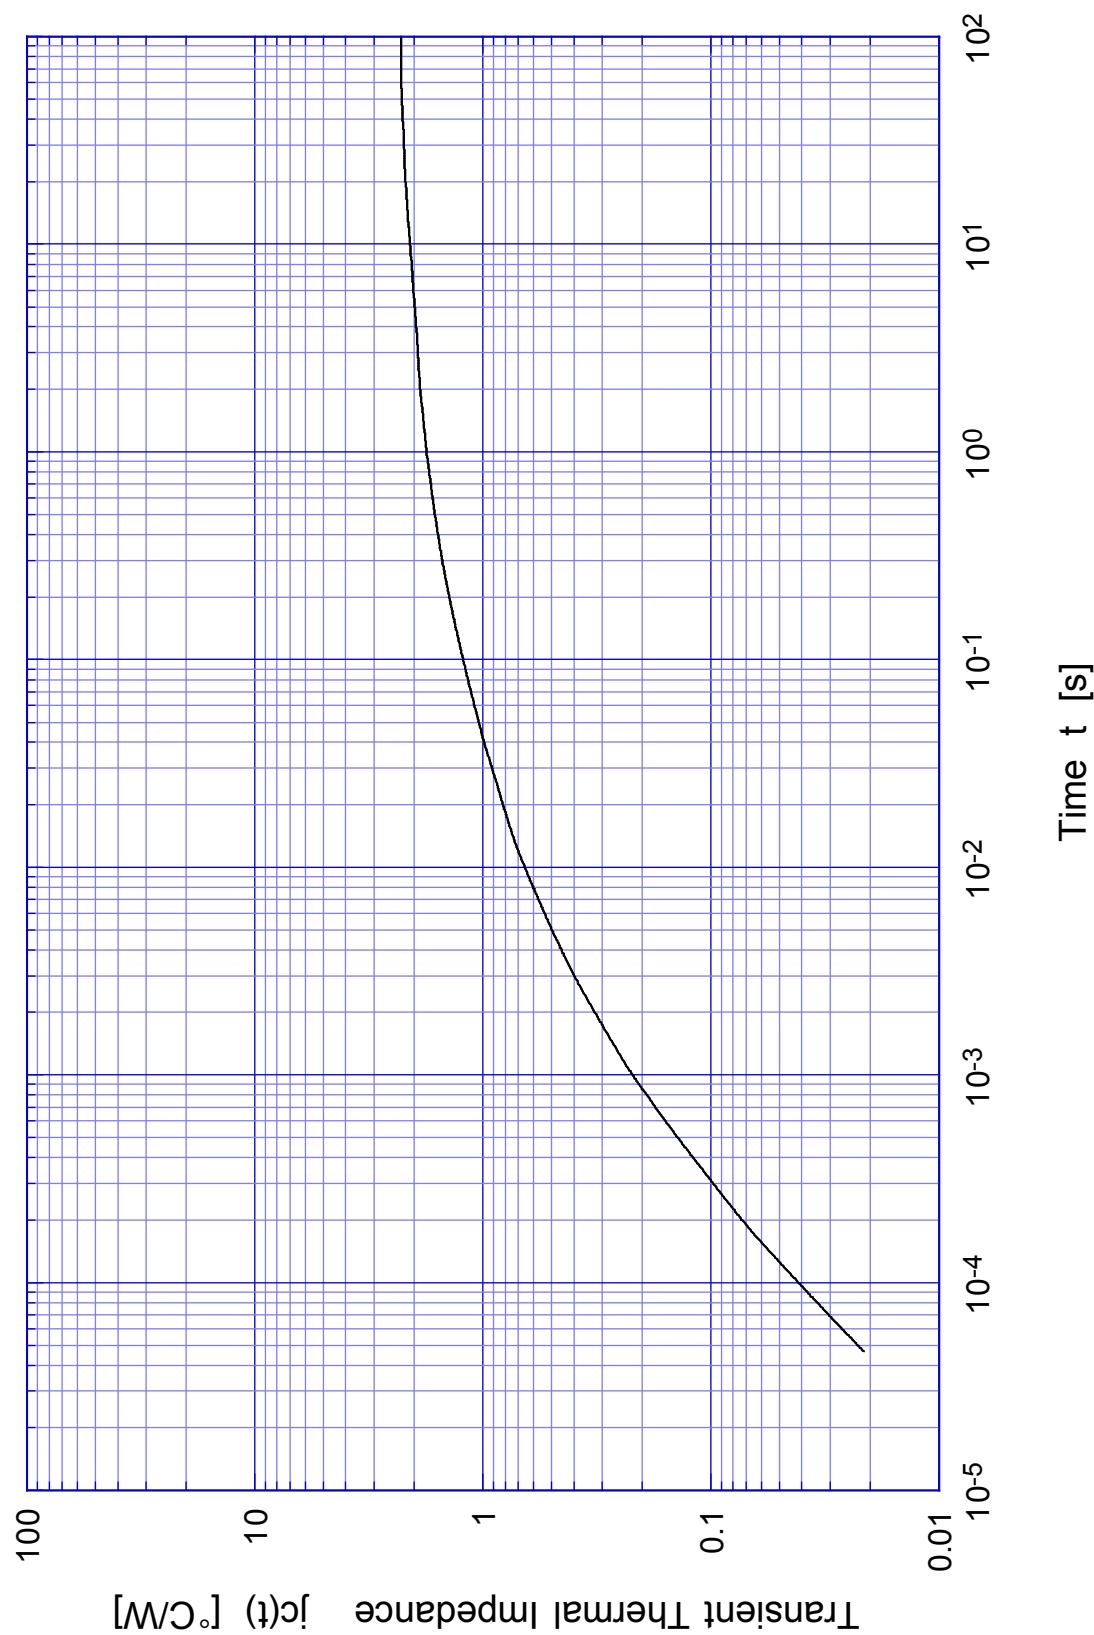

MA4820

Safe Operating Area

