
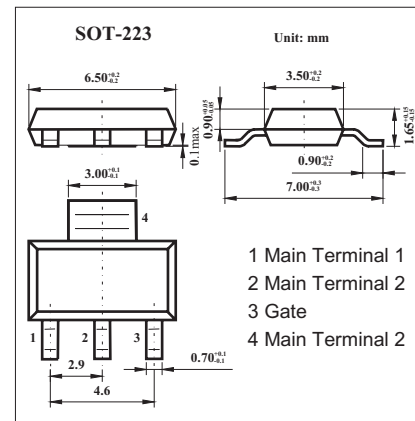


Sensitive Gate Triacs

MAC08BT1,MAC08MT1

■ Features

- Sensitive Gate Trigger Current in Four Trigger Modes
- Blocking Voltage to 600 Volts
- Glass Passivated Surface for Reliability and Uniformity
- Surface Mount Package



■ Absolute Maximum Ratings $T_A = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Peak Repetitive Forward and Reverse Blocking Voltage* MAC08BT1	V_{DRM}	200	V
MAC08MT1	V_{RRM}	600	V
Forward Current RMS	$I_{T(RMS)}$	0.8	A
Peak Forward Surge Current, $T_A = 25^\circ\text{C}$	I_{TSM}	8.0	A
Circuit Fusing Considerations ($t = 8.3\text{ ms}$)	I^2t	0.4	A^2s
Peak Gate Power — Forward, $T_A = 25^\circ\text{C}$	P_{GM}	5.0	W
Average Gate Power — Forward, $T_A = 25^\circ\text{C}$	$P_{GF(AV)}$	0.1	W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	156	$^\circ\text{C/W}$
Lead Solder Temperature ($< 1/16"$ from case, 10 s max)		230	$^\circ\text{C}$
Operating Junction Temperature Range @ Rated V_{RRM} and V_{DRM}	T_J	-40 to +110	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +150	$^\circ\text{C}$

* $T_J = 25$ to 125°C , $R_{GK} = 1\text{ k}\Omega$

■ Electrical Characteristics ($T_A = 25^\circ\text{C}$, $R_{GK} = 1\text{ k}\Omega$ unless otherwise noted.)

Parameter	Symbol	Testconditions	Min	Max	Unit
Peak Forward or Reverse $T_C = 25^\circ\text{C}$	I_{DRM} , I_{RRM}	$V_{AK} = \text{Rated } V_{DRM} \text{ or } V_{RRM}$		10	μA
Blocking Current $T_C = 110^\circ\text{C}$				200	
Forward "On" Voltage*1	V_{TM}	$I_{TM} = \pm 1.1\text{ A Peak @ } T_A = 25^\circ\text{C}$		1.9	V
Gate Trigger Current (Continuous dc)*2 $T_C = 25^\circ\text{C}$	I_{GT}	$V_D = 12\text{ V}$, $R_L = 100\text{ Ohms}$		10	mA
Gate Trigger Voltage (Continuous dc)	V_{GT}	$V_D = 12\text{ V}$, $R_L = 100\text{ Ohms}$		2.0	V
Holding Current	I_H	$V_D = 12\text{ V}$, Gate Open, initiating current = $\pm 20\text{ mA}$		5	mA
Critical Rate of Rise of Commutation Voltage *	$(dv/dt)_C$		1.5		$\text{V}/\mu\text{s}$
Critical Rate of Rise of Off State Voltage	dv/dt	$V_{pk} = \text{Rated } V_{DRM}$, $T_C = 110^\circ\text{C}$, Gate Open, Exponential Method	10		$\text{V}/\mu\text{s}$

* $f = 250\text{ Hz}$, $I_{TM} = 1.0\text{ A}$, Commutating $di/dt = 1.5\text{ A/ms}$ On-State Current Duration = 2.0 ms,

$V_{DRM} = 200\text{ V}$, Gate Unenergized, $T_C = 110^\circ\text{C}$, Gate Source Resistance = 150Ω , See Figure 10)

MAC08BT1,MAC08MT1

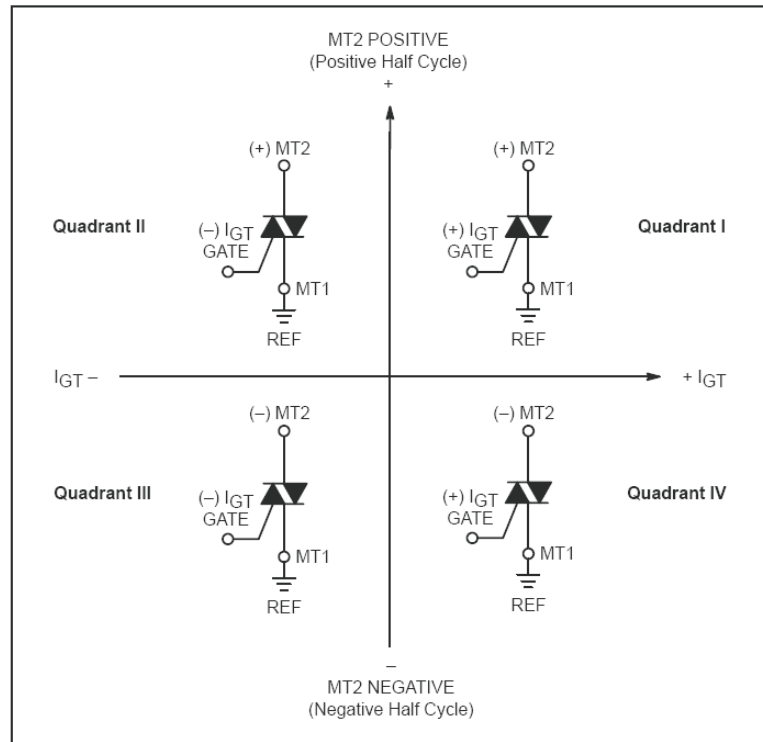


Figure 1. Quadrant Definitions for a Triac

■ Typical Characteristics

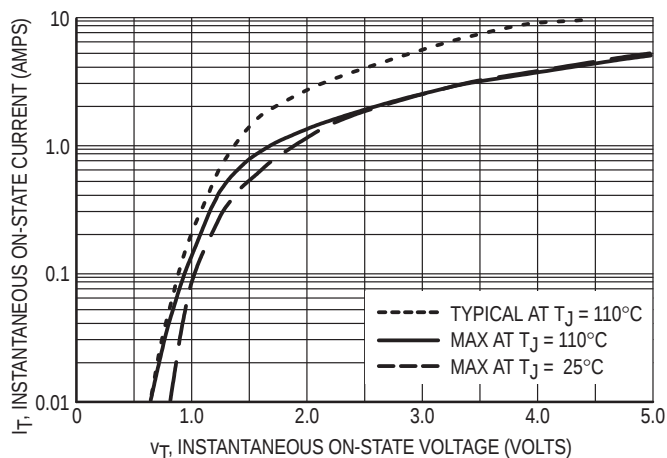


Figure 2. On-State Characteristics

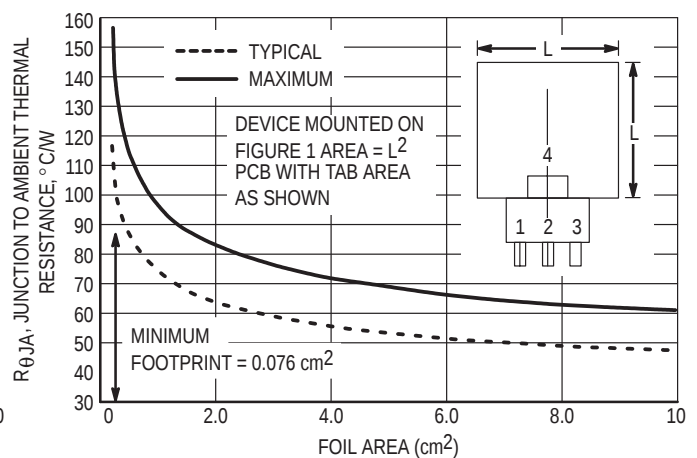


Figure 3. Junction to Ambient Thermal Resistance versus Copper Tab Area

MAC08BT1,MAC08MT1

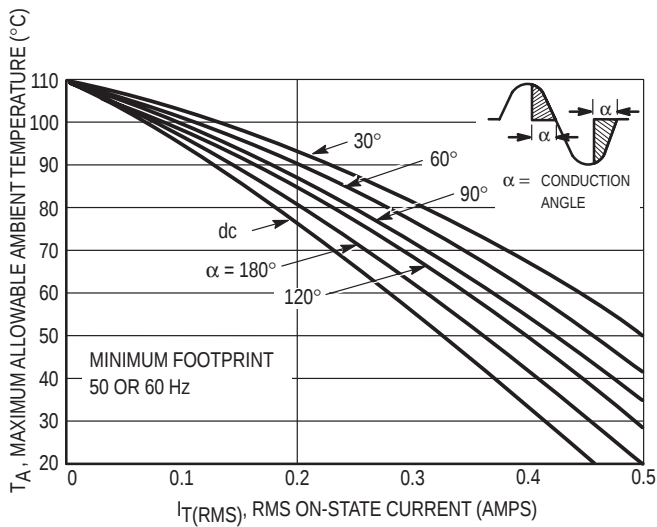


Figure 4. Current Derating, Minimum Pad Size
Reference: Ambient Temperature

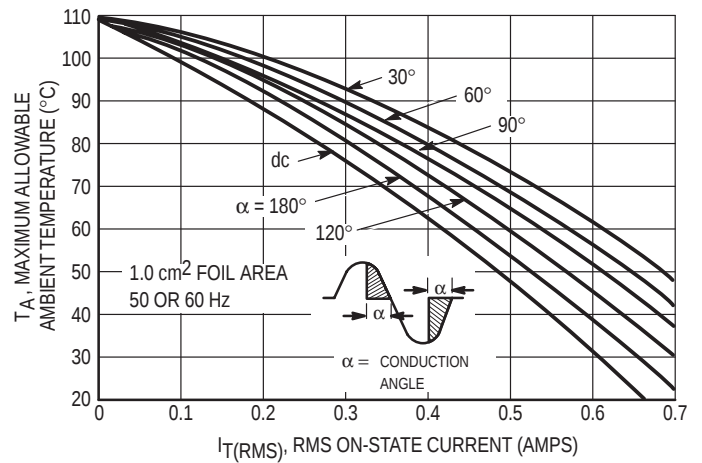


Figure 5. Current Derating, 1.0 cm Square Pad
Reference: Ambient Temperature

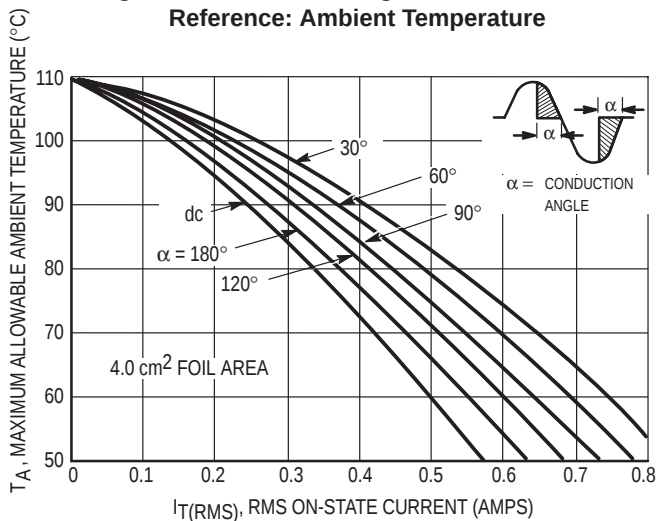


Figure 6. Current Derating, 2.0 cm Square Pad
Reference: Ambient Temperature

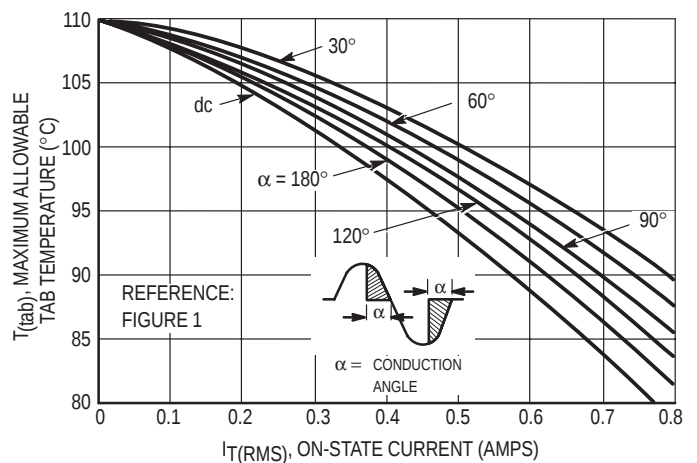


Figure 7. Current Derating
Reference: MT2 Tab

MAC08BT1,MAC08MT1

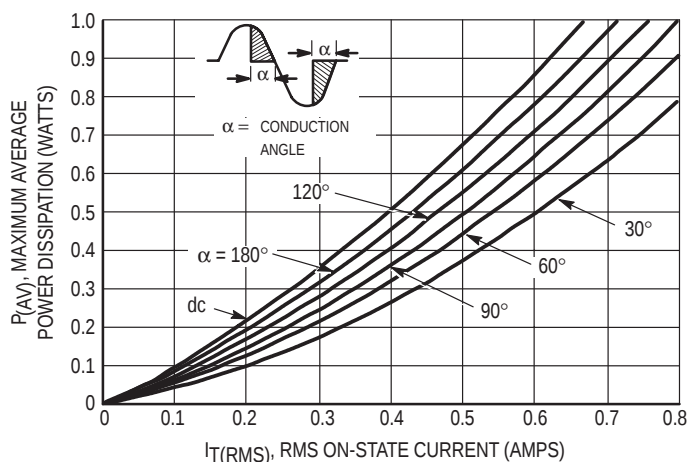


Figure 8. Power Dissipation




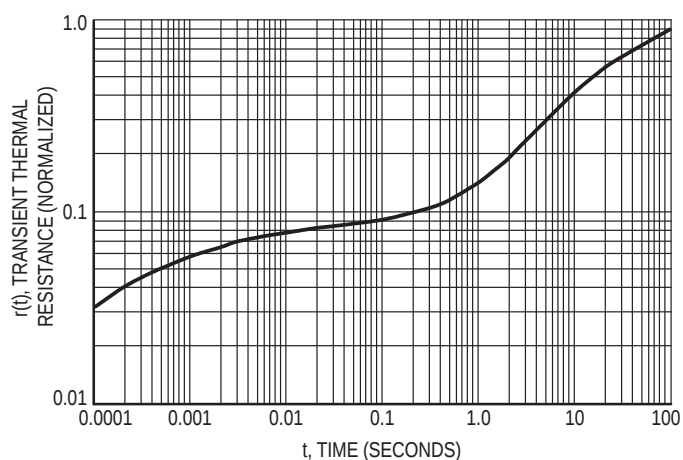


Figure 9. Thermal Response, Device Mounted on Figure 1 Printed Circuit Board

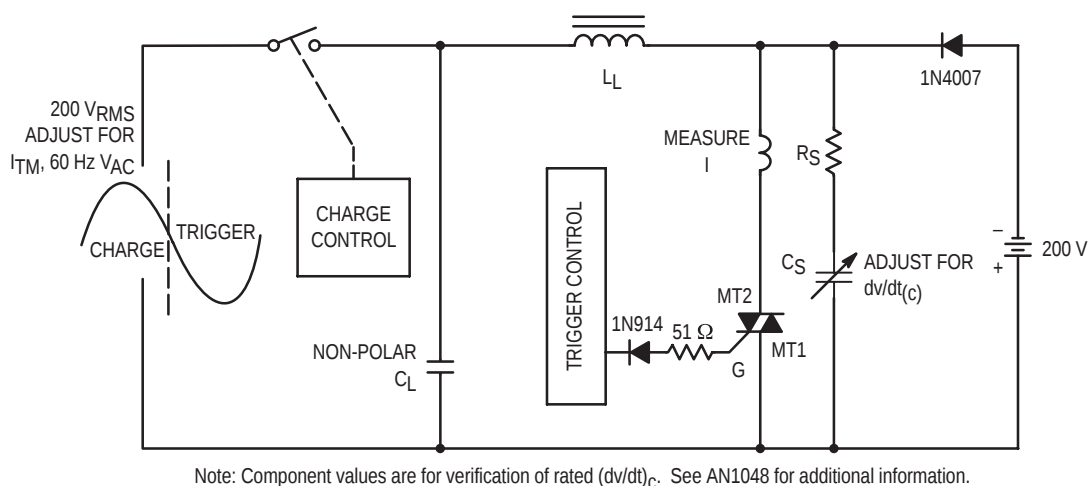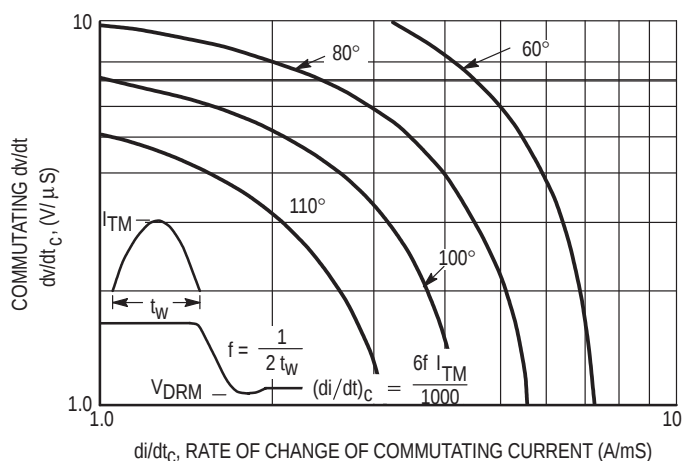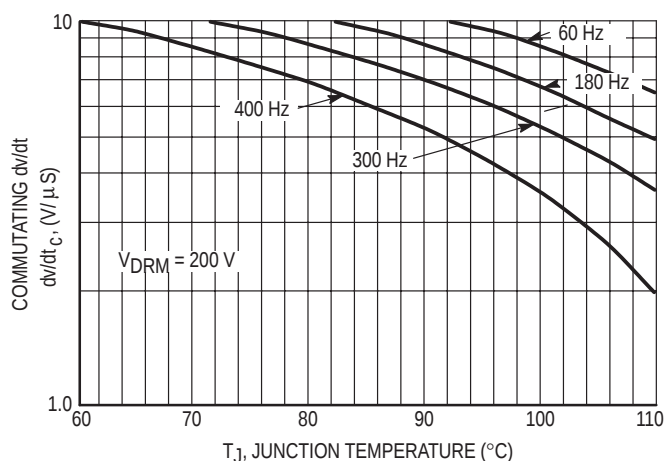

Note: Component values are for verification of rated $(dv/dt)_c$. See AN1048 for additional information.

Figure 10. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Voltage $(dv/dt)_c$ Figure 11. Typical Commutating dv/dt versus Current Crossing Rate and Junction TemperatureFigure 12. Typical Commutating dv/dt versus Junction Temperature at 0.8 Amps RMS

MAC08BT1,MAC08MT1

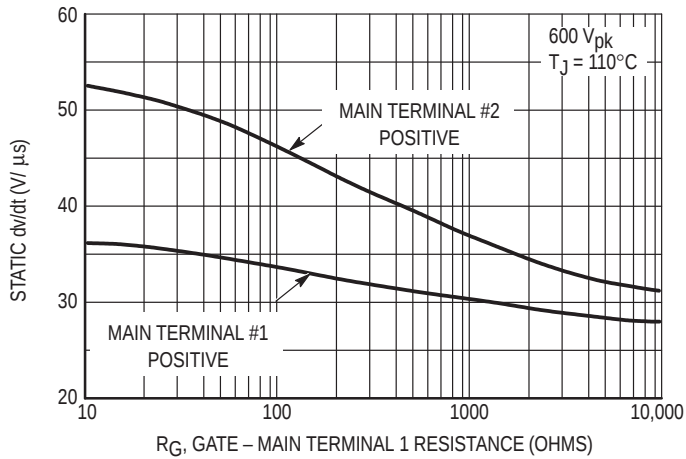


Figure 13. Exponential Static dv/dt versus Gate – Main Terminal 1 Resistance

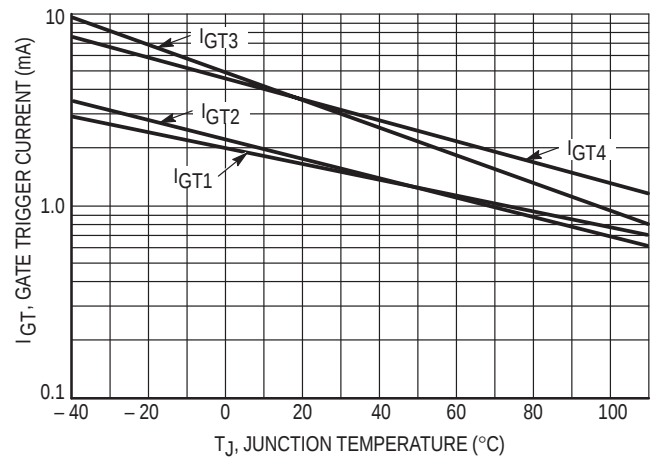


Figure 14. Typical Gate Trigger Current Variation

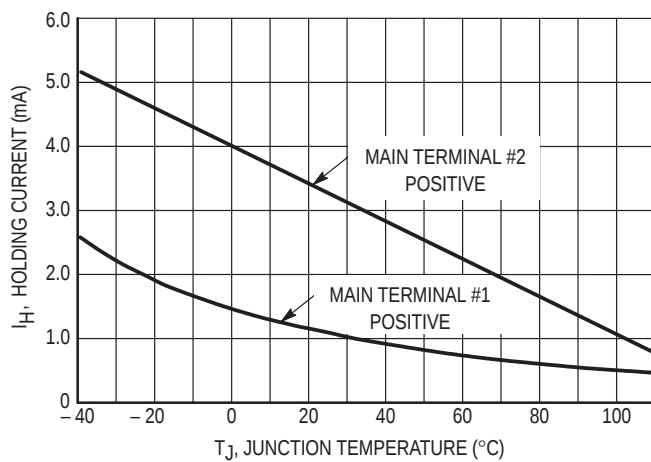


Figure 15. Typical Holding Current Variation

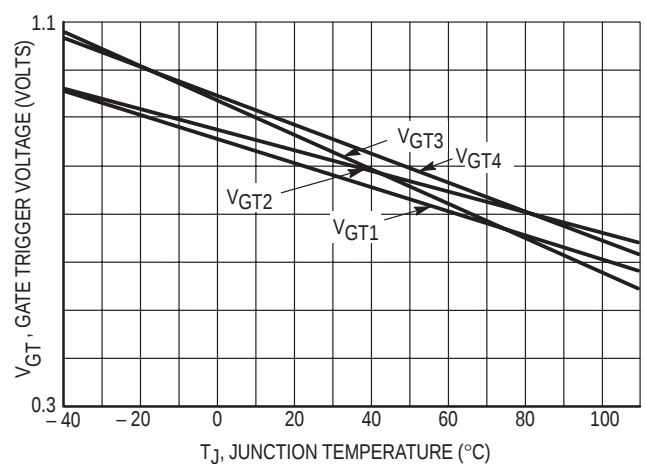


Figure 16. Gate Trigger Voltage Variation