

TO-92 Plastic-Encapsulate Thyristors

MAC97A6,A8 TRIAC

MAIN FEATURES

Symbol	value	unit
$I_{T(RMS)}$	1	A
V_{DRM}/V_{RRM}	MAC97A6	400 V
	MAC97A8	600 V
I_{TSM}	8	A

TO-92

1. ANODE

2. GATE

3. ANODE



DESCRIPTION

Logic level sensitive gate triac intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.

FEATURES

- Blocking voltage to 400 V (MAC97A6)
- RMS on-state current to 0.6 A
- General purpose bidirectional switching

APPLICATIONS

- General purpose bidirectional switching
- Phase control applications
- Solid state relays



Limiting values

Symbol	Parameter	Conditions	Value	Unit
V_{DRM}/V_{RRM}	repetitive peak off-state voltage	$T_j = 25 \text{ to } 125^\circ\text{C}$ $T_j = 25 \text{ to } 125^\circ\text{C}$	400 600	V
I_{GM}	gate current(peak value)	$t = 2\mu\text{s max}$	1	A
V_{GM}	gate voltage(peak value)	$t = 2\mu\text{s max}$	5	V
P_{GM}	gate power(peak value)	$t = 2\mu\text{s max}$	5	W
T_j	Junction Temperature	-	-40 ~ 125	$^\circ\text{C}$
T_{stg}	Storage Temperature	-	-40 ~ 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)


Parameter		Symbol	Test conditions		Min	Max	Unit
Rated repetitive peak off-state/reverse voltage		$V_{\text{DRM}}, V_{\text{RRM}}$	$I_{\text{D}}=10\mu\text{A}$	MAC97A6 MAC97A8	400 600		V
Rated repetitive peak off-state current		I_{DRM}	$V_{\text{D}}=V_{\text{DRM}}$			10	μA
On-state voltage		V_{TM}	$I_{\text{T}}=1\text{A}, I_{\text{G}}=50\text{mA}$			1.9	V
Gate trigger current	I	I_{GT}	$T_2(+), G(+)$	$V_{\text{D}}=12\text{V}$ $R_{\text{L}}=100\Omega$		5	mA
	II		$T_2(+), G(-)$			5	mA
	III		$T_2(-), G(-)$			5	mA
	IV		$T_2(-), G(+)$			-	mA
Gate trigger voltage	I	V_{GT}	$T_2(+), G(+)$	$V_{\text{D}}=12\text{V}$ $R_{\text{L}}=100\Omega$		1.5	V
	II		$T_2(+), G(-)$			1.5	V
	III		$T_2(-), G(-)$			1.5	V
	IV		$T_2(-), G(+)$			-	V
Holding current		I_{H}	$I_{\text{T}}=600\text{mA}, I_{\text{G}}=20\text{mA}$			10	mA

TO-92 Package Outline Dimensions

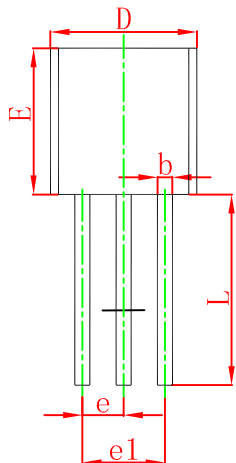

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

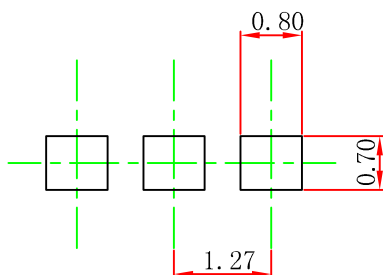


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE


JCET reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JCET does not assume any liability arising out of the application or use of any product described herein.

TO-92 PACKAGE TAPEING DIMENSION

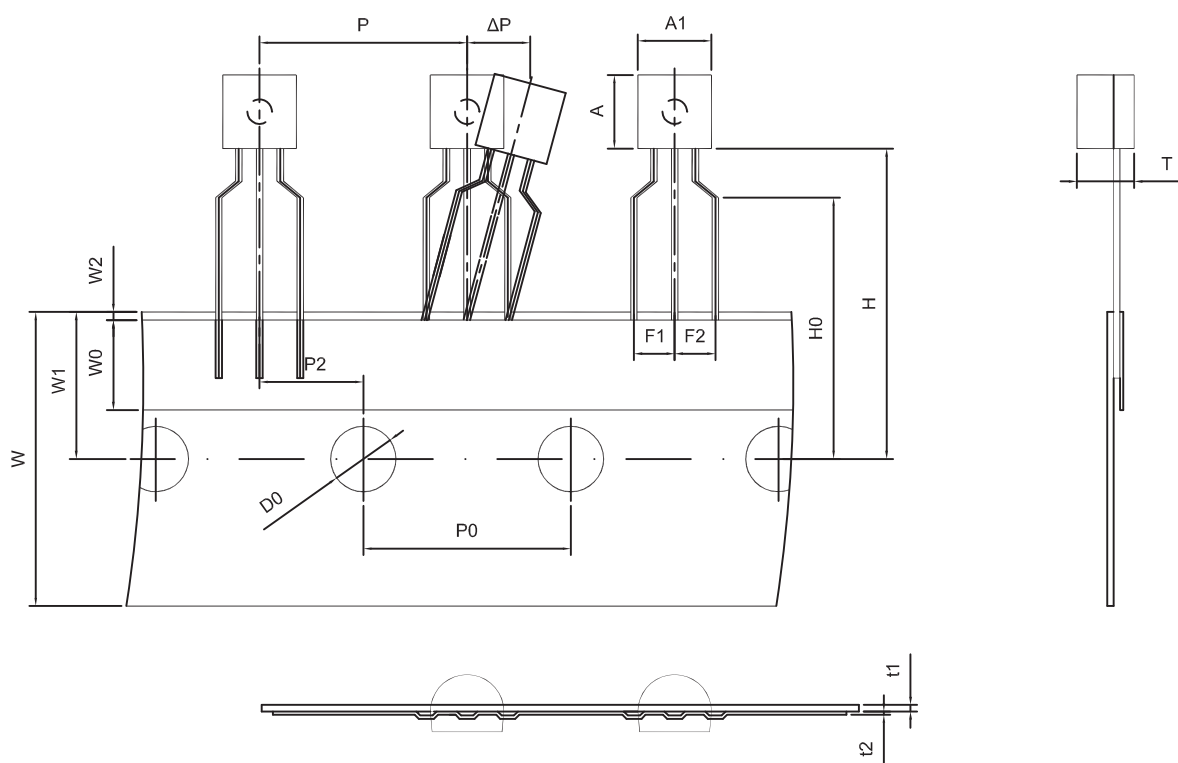

Dimiensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

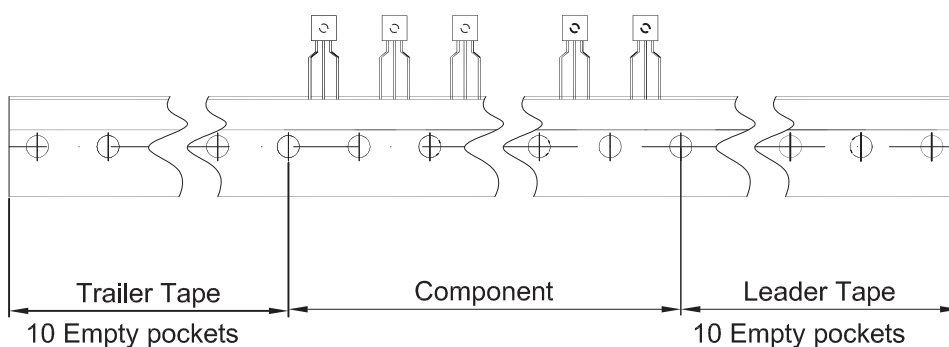

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250