

General Description

The MAX14667 is a dual USB charger adapter emulator with automatic host charger identification circuitry for USB dedicated chargers.

The device allows USB wall adapters, travel chargers, and other dedicated chargers to identify themselves as a USB dedicated charger to USB devices, an Apple charger to Apple products, and a Samsung Galaxy Tablet dedicated charger port to Samsung Galaxy Tablet devices.


The device features a control input that allows for charger mode selection. The MAX14667 supports USB Battery Charger (BC) revision 1.2 specification compliant devices, including all major brand USB devices from Samsung, Nokia, Blackberry, LG, Apple devices, and Samsung Galaxy devices in autodetection 1A or autodetection 2A modes.

The MAX14667 is available in an 8-pin (2.9mm x 1.6mm) SOT23 package, and is specified over the -40°C to +85°C extended temperature range.

Applications

- USB Wall Charger and Travel Adapter
- USB Car Charger and Cigarette Lighter Adapter
- Universal Charger Including iPod®/iPad®/iPhone®

Typical Operating Circuit

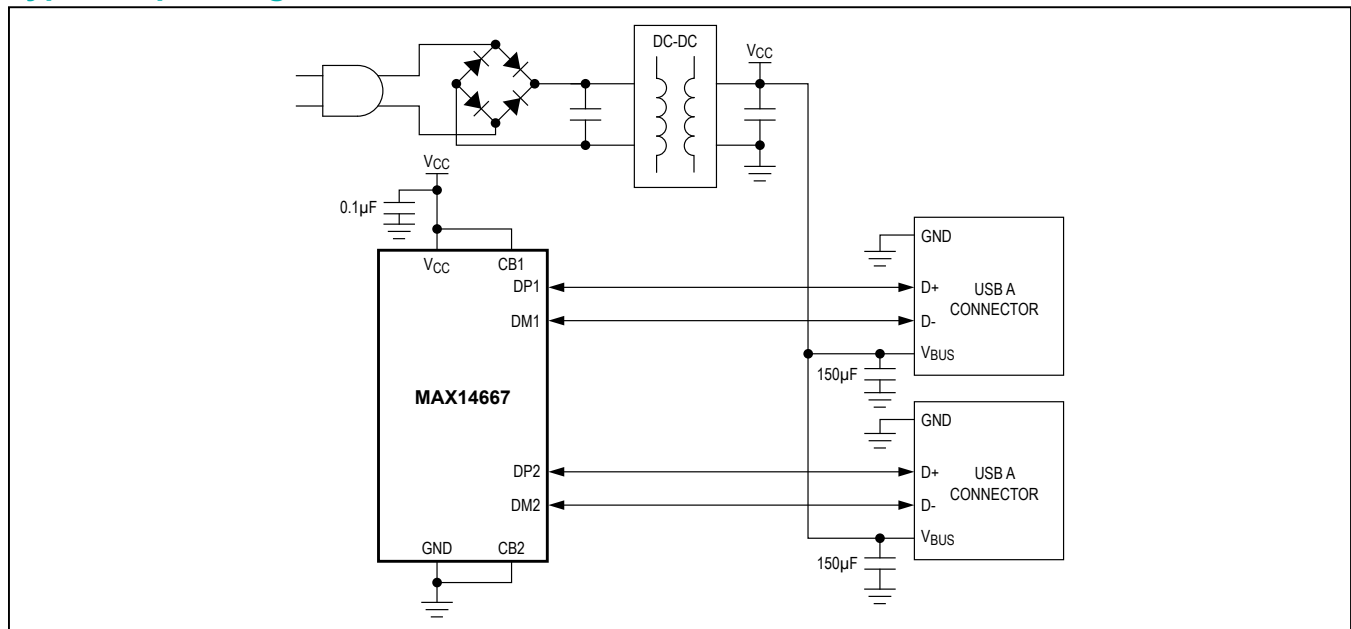

For related parts and recommended products to use with this part, refer to www.maximintegrated.com/MAX14667.related.

Benefits and Features

- Optimized for Charging Adapters
 - Flexible Device and Adapter Connection Order
- Faster Charging
 - Apple 2A Charging Capability
 - Samsung Galaxy Tablet 2A Charging Capability
- Improved Charger Interoperability
 - Meets New USB BC Revision 1.2 Specification
 - Supports Samsung Galaxy Smartphones
 - Backwards Compatible with Previous USB BC Revisions
 - Meets China YD/T1591-2009 Charging Specification
- Greater User Flexibility
 - CB_Pins Control Charger Mode
- Saves Space on Board
 - 2.9mm x 1.6mm, 8-Pin SOT23 Package
 - High-ESD Human Body Model (HBM) Protection on DP and DM

iPod®/iPad®/iPhone® are registered trademarks of Apple, Inc.

Ordering Information appears at end of data sheet.

Absolute Maximum Ratings

(All voltages referenced to GND.)

V_{CC} , CB_{-} , DP_{-} , DM_{-} -0.3V to +6V
 Continuous Current into Any Terminal $\pm 50\text{mA}$
 Continuous Power Dissipation ($T_A = +70^{\circ}\text{C}$)
 SOT23 (derate 5.2mW/ $^{\circ}\text{C}$ above $+70^{\circ}\text{C}$) 412.4mW
 Operating Temperature Range -40°C to $+85^{\circ}\text{C}$

Maximum Junction Temperature $+150^{\circ}\text{C}$
 Storage Temperature Range -65°C to $+150^{\circ}\text{C}$
 Lead Temperature (soldering, 10s) $+300^{\circ}\text{C}$
 Soldering Temperature (reflow) $+260^{\circ}\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Package Thermal Characteristics (Note 1)

SOT23

Junction-to-Ambient Thermal Resistance (θ_{JA}) 194°C/W
 Junction-to-Case Thermal Resistance (θ_{JC}) 70°C/W

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to www.maximintegrated.com/thermal-tutorial.

Electrical Characteristics

($V_{CC} = 3.0\text{V}$ to 5.5V , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, unless otherwise noted. Typical values are at $V_{CC} = +5.0\text{V}$, $T_A = +25^{\circ}\text{C}$, unless otherwise noted.) (Notes 2, 3)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|--------------------------|---|------|------|----------|---------------|
| POWER SUPPLY | | | | | | |
| Operating Power-Supply Range | V_{CC} | | 3 | | 5.5 | V |
| | | Apple/Samsung divider valid range | 4.75 | | 5.5 | |
| V_{CC} Supply Current | I_{CC} | $V_{CC} = 5.0\text{V}$ | | 45 | 65 | μA |
| Power-On Reset | POR | | | 1.5 | | V |
| POR Delay | t_{POR} | | | 100 | | ms |
| ANALOG SWITCH | | | | | | |
| Analog Signal Range | $V_{DP_{-}}, V_{DM_{-}}$ | | 0 | | V_{CC} | V |
| On-Resistance of DP_{-}/DM_{-} Short | R_{SHORT} | $V_{DP_{-}} = 0.7\text{V}$, $I_{DM_{-}SINK} = 100\mu\text{A}$ to GND | | 4.5 | 11 | Ω |
| DYNAMIC | | | | | | |
| CB_{-} Switching Time | t_{ON} | $CB_{-} = V_{CC}$ to 0, 0 to V_{CC} | | 4 | | μs |
| INTERNAL RESISTORS | | | | | | |
| DP_{-}/DM_{-} Short Pulldown | R_{PD} | | 350 | 500 | 700 | k Ω |
| 40 V_{CC} Bias | $V_{AP1(2)A_{-}P(M)}$ | $V_{CC} = 4.75\text{V}, 5.5\text{V}$ | 39 | 40 | 41 | % V_{CC} |
| 54 V_{CC} Bias | $V_{AP1(2)A_{-}M(P)}$ | $V_{CC} = 4.75\text{V}, 5.5\text{V}$ | 52.6 | 53.6 | 54.6 | % V_{CC} |
| 25 V_{CC} Bias | $V_{SSG_{-}P/M}$ | $V_{CC} = 4.75\text{V}, 5.5\text{V}$ | 24 | 25 | 26 | % V_{CC} |

Electrical Characteristics (continued)

(V_{CC} = 3.0V to 5.5V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at V_{CC} = +5.0V, T_A = +25°C, unless otherwise noted.) (Notes 2, 3)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|-----------|------------------------------------|-----|----------|-----|---------|
| LOGIC INPUT (CB) | | | | | | |
| CB_ Input Logic High | V_{IH} | | 1.4 | | | V |
| CB_ Input Logic Low | V_{IL} | | | | 0.4 | V |
| CB_ Input Leakage Current | I_{CB-} | $V_{IN} = 0, V_{IL}, V_{IH}, 5.5V$ | -1 | | +1 | μA |
| ESD PROTECTION | | | | | | |
| ESD Protection Level (DP_ and DM_ Only) | V_{ESD} | Human Body Model | | ± 15 | | kV |
| | | Contact Model | | ± 6 | | |

Comparator Characteristics (Note 4)

(V_{CC} = 4.75V to 5.5V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at V_{CC} = +5.0V, T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|---------------------------|------------|-------------|------------------|------|-----|------|------------|
| DM1 Comparator Threshold | V_{DM1F} | DM_ falling | Autodetection 1A | 40 | 41 | 42 | % V_{CC} |
| | | | Autodetection 2A | 31 | 32 | 33 | |
| DM1 Comparator Hysteresis | | | | | 1 | | % V_{CC} |
| DM2 Comparator Threshold | V_{DM2F} | DM_ falling | | 6.31 | 7 | 7.62 | % V_{CC} |
| DM2 Comparator Hysteresis | | | | | 1 | | % V_{CC} |
| DP Comparator Threshold | V_{DPR} | DP_ rising | Autodetection 1A | 45 | 46 | 47 | % V_{CC} |
| | | | Autodetection 2A | 57 | 58 | 59 | |
| DP Comparator Hysteresis | | | | | 1 | | % V_{CC} |


Note 2: All units are 100% production tested at T_A = +25°C. Specifications over operating temperature range are guaranteed by design.

Note 3: The device is operational from 3.0V to 5.5V. For the resistor-divider equivalent network to function properly, keep V_{CC} within the 4.75V to 5.5V range.


Note 4: The comparators are disabled during the POR delay.

Typical Operating Characteristics

(V_{CC} = 5.0V, T_A = +25°C, unless otherwise noted.)

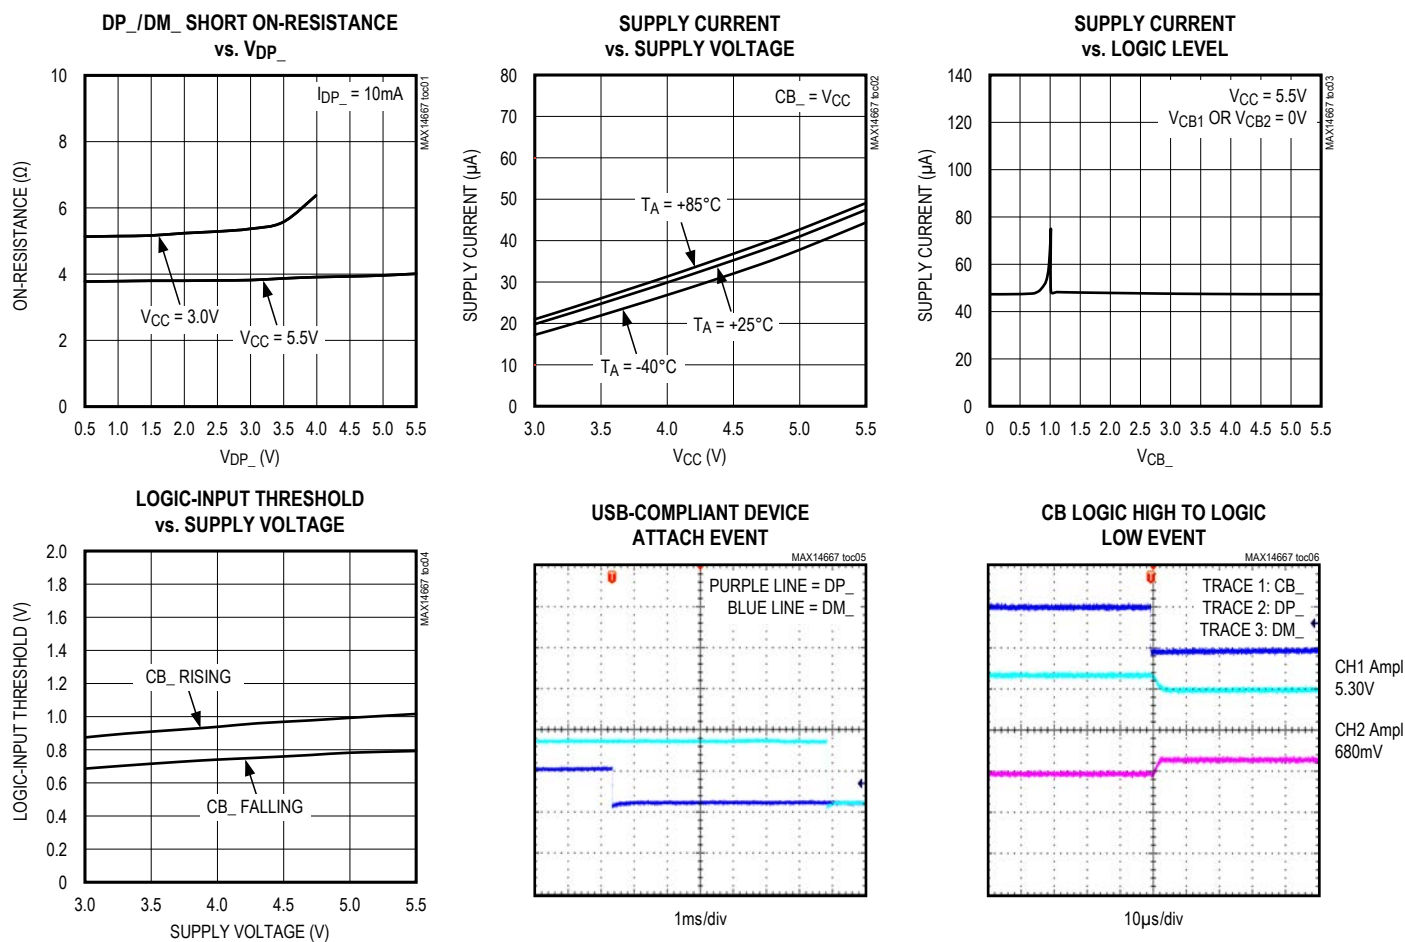


Pin Configuration

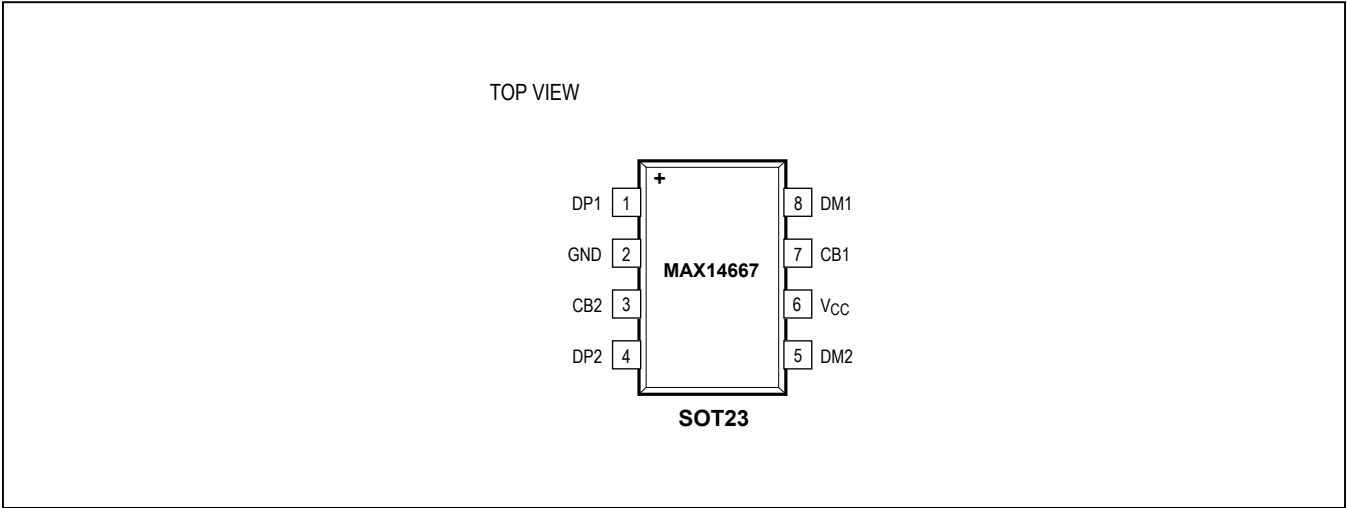

Pin Description

| PIN | NAME | FUNCTION |
|-----|------|--|
| 1 | DP1 | USB D+ Connection for Connector One |
| 2 | GND | IC Ground; Return to the Transformer Output |
| 3 | CB2 | Control Bit for Connector Two |
| 4 | DP2 | USB D+ Connection for Connector Two |
| 5 | DM2 | USB D- Connection for Connector Two |
| 6 | VCC | Power Supply. Bypass VCC with a 0.1μF ceramic capacitor as close as possible to the pin. |
| 7 | CB1 | Control Bit for Connector One |
| 8 | DM1 | USB D- Connection for Connector One |

Functional Diagram

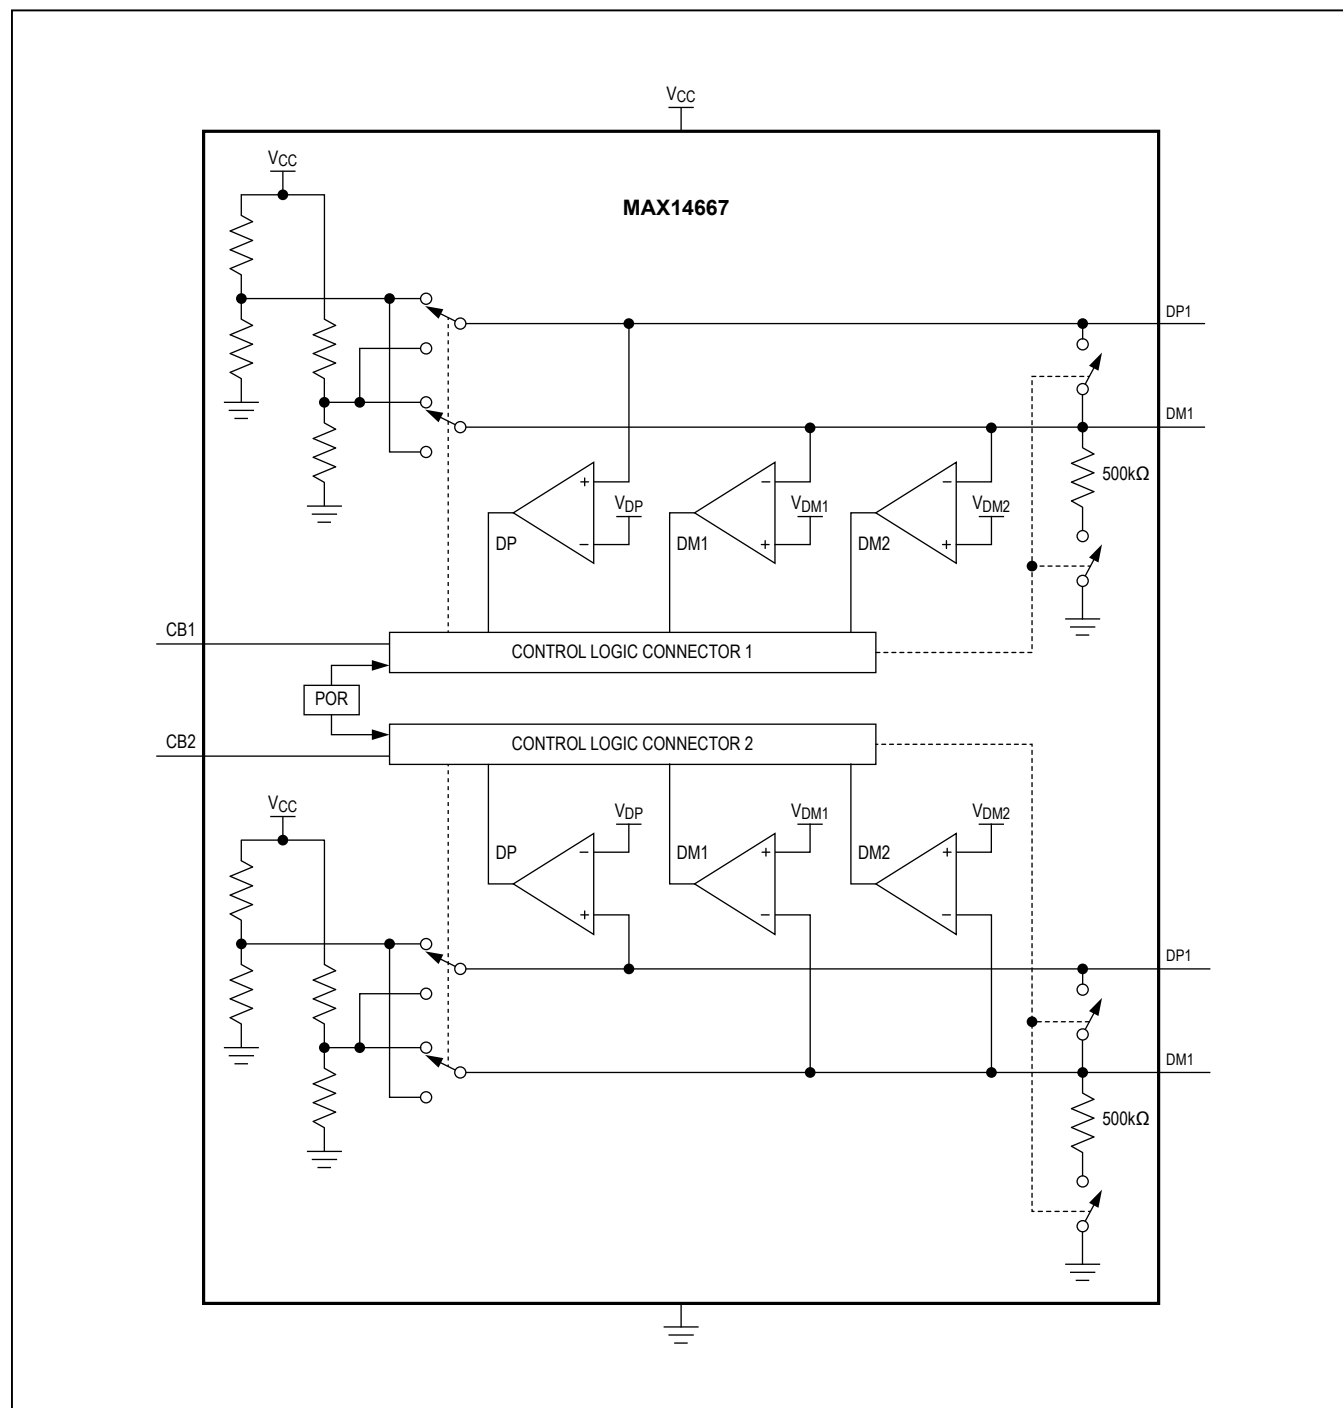

Detailed Description

The MAX14667 is a dual USB host adapter emulator with automatic host charger identification circuitry for USB dedicated chargers.

The device allows USB wall adapters, travel chargers, and other dedicated chargers to identify themselves as a USB-dedicated charger to USB devices, an Apple charger to Apple products, and a Samsung Galaxy tablet dedicated charger port to Samsung Galaxy tablet devices.

Resistor-Dividers

The MAX14667 features internal resistor-divider equivalent networks for biasing data lines to provide support for Apple-compliant devices as well as Samsung Galaxy Tablets.

Mode Control

The device features two digital inputs, CB1 and CB2, for mode selection. Connect CB_ to a logic-level high voltage to place the corresponding channel in autodetection 2A charger mode or to a logic-level low voltage to place the corresponding channel in autodetection 1A charger mode. See Table 1.

Autodetection

The MAX14667 features Autodetection 1A and autodetection 2A for dedicated chargers in which the device monitors the voltages at DM_ and DP_ to determine the type of device attached. When the voltage at DM_ is V_{DM1F} or higher, and the voltage at DP_ is V_{DPR} or lower, the voltage remains unchanged. If the voltage at DM_ is forced below the V_{DM1F} threshold, the internal switch disconnects DM_ and DP_ from the resistor-dividers and

DM_ and DP_ are shorted together for USB-dedicated charging mode. If the Samsung Galaxy Tablet device is connected, DM_ and DP_ are shorted together and connected to the correct resistor-divider for Samsung Galaxy Tablet dedicated charging mode.

Once the charging voltage is removed, the short between DP_ and DM_ is disconnected.

±15kV ESD Protection

As with all Maxim devices, ESD-protection structures are incorporated on all pins to protect against electrostatic discharges encountered during handling and assembly. The DP_ and DM_ lines have extra protection against static electricity. Maxim’s engineers have developed state-of-the-art structures to protect these pins against ESD of ±15kV without damage.

The ESD structures withstand high ESD in normal operation and while the device is powered down. After an ESD event, the MAX14667 continues working without latchup, whereas competing products can latch and must be powered down to remove latchup. ESD protection can be tested in various ways. The DP_ and DM_ lines of this product family are characterized for protection to the following limits:

- 1) ±15kV using the Human Body Model
- 2) ±6kV using the Contact Discharge method

ESD Test Conditions

ESD performance depends on a variety of conditions. Contact Maxim for a reliability report that documents test setup, test methodology, and test results.

Table 1. Digital Input State for MAX14667

| CB | | USB B.C. 1.2 Specification | Samsung Galaxy Tablet | Apple |
|----|------------------|--------------------------------|-----------------------|-----------------------------|
| 1 | Autodetection 2A | Supports all compliant devices | Charge at 2A | Appears as Apple 2A charger |
| 0 | Autodetection 1A | Supports all compliant devices | Charge at 2A | Appears as Apple 1A charger |

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE | TOP MARK |
|---------------|----------------|-------------|----------|
| MAX14667EKA+T | -40°C to +85°C | 8 SOT23 | AETH |

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

Chip Information

PROCESS: BiCMOS

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------|------------------|
| 8 SOT23 | K8+2 | 21-0078 | 90-0176 |

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|--------------------|------------------|-----------------|------------------|
| 0 | 6/13 | Initial release | — |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.