



# High-Current, 25 $\Omega$ , SPDT, CMOS Analog Switches

**MAX4659/MAX4660**

## General Description

The MAX4659/MAX4660 are medium voltage CMOS analog switches with a low on-resistance of 25 $\Omega$  max specifically designed to handle large switch currents. With a switch capability of up to 200mA peak current and 150mA continuous current (MAX4660), and up to 150mA peak current and 75mA continuous current (MAX4659), these parts can switch loads as low as 50 $\Omega$ . They can replace reed relays with a million times the speed and a virtually unlimited number of lifetime cycles. Normal power consumption is only 3mW, whether the switch is on or off. These parts are TTL/CMOS compatible and will switch any voltage within their power-supply range.

The devices are single-pole/double-throw (SPDT) switches. The MAX4659/MAX4660 contain one normally closed (NC) switch and one normally open (NO) switch.

The MAX4659/MAX4660s' power-supply range is from  $\pm 4.5\text{V}$  to  $\pm 20\text{V}$  for dual-supply operation and  $+9\text{V}$  to  $+40\text{V}$  for single-supply operation. These switches can operate from any combination of supplies, within a 40V  $V_+$  to  $V_-$  range. They conduct equally well in either direction and can handle rail-to-rail analog signals. The off-leakage current is only 1nA max at  $T_A = +25^\circ\text{C}$ . The MAX4659 is available in 8-pin  $\mu\text{MAX}^\circledR$  and SO packages. The MAX4660 is available in thermally enhanced exposed paddle  $\mu\text{MAX}$  and SO packages.

## Applications

Relay Replacement  
Test Equipment  
Communication Systems  
xDSL Modems  
PBX, PABX Systems  
Audio Signal Routing  
Audio Systems  
PC Multimedia Boards  
Redundant/Backup Systems

$\mu\text{MAX}$  is a registered trademark of Maxim Integrated Products, Inc.

## Features


- ◆ High Continuous Current Handling  
150mA Continuous Current (MAX4660)  
75mA Continuous Current (MAX4659)
- ◆ High Peak Current Handling  
200mA Peak Current (MAX4660)  
150mA Peak Current (MAX4659)
- ◆ 25 $\Omega$  max On-Resistance ( $\pm 15\text{V}$  Supplies)
- ◆  $V_L$  Supply Not Required
- ◆ 1.5 $\Omega$  max  $R_{ON}$  Flatness ( $\pm 15\text{V}$  Supplies)
- ◆ Rail-to-Rail Signal Handling
- ◆  $+12\text{V}$  Single Supply or  $\pm 15\text{V}$  Dual-Supply Operation
- ◆ Pin Compatible with DG419, MAX319

## Ordering Information

| PART       | TEMP RANGE                                   | PIN-PACKAGE            | PKG CODE |
|------------|----------------------------------------------|------------------------|----------|
| MAX4659EUA | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$ | 8 $\mu\text{MAX}$      | U8-1     |
| MAX4659ESA | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$ | 8 SO                   | S8-2     |
| MAX4660EUA | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$ | 8 $\mu\text{MAX-EP}^*$ | U8E-2    |
| MAX4660ESA | -40 $^\circ\text{C}$ to +85 $^\circ\text{C}$ | 8 SO-EP*               | S8E-12   |

\*EP = Exposed paddle.

## Pin Configuration

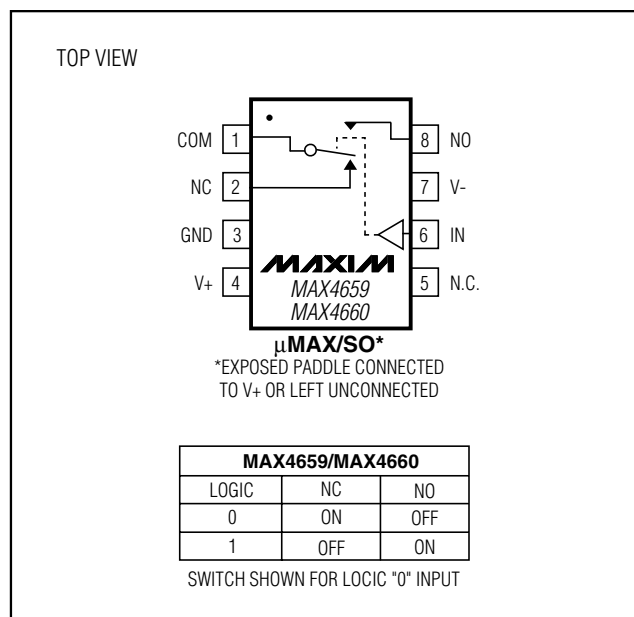

# High-Current, 25Ω, SPDT, CMOS Analog Switches

## ABSOLUTE MAXIMUM RATINGS

|                                                       |                            |
|-------------------------------------------------------|----------------------------|
| V+ to GND                                             | -0.3V to +44V              |
| V- to GND                                             | -44V to +0.3V              |
| V+ to V-                                              | -0.3V to +44V              |
| All Other Pins to GND (Note 1)                        | (V- - 0.3V) to (V+ + 0.3V) |
| Continuous Current COM, NO, NC (MAX4660)              | ±150mA                     |
| Continuous Current COM, NO, NC (MAX4659)              | ±75mA                      |
| Continuous Current IN                                 | ±30mA                      |
| Peak Current COM, NO, NC                              |                            |
| MAX4660 (pulsed at 1ms, 10% duty cycle)               | ±200mA                     |
| MAX4659 (pulsed at 1ms, 10% duty cycle)               | ±150mA                     |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C) |                            |
| 8-Pin μMAX-EP (derate 10.3mW/°C above +70°C)          |                            |
| MAX4660                                               | 825mW                      |

|                                            |                 |
|--------------------------------------------|-----------------|
| 8-Pin μMAX (derate 4.50mW/°C above +70°C)  |                 |
| MAX4659                                    | 362mW           |
| 8-Pin SO-EP (derate 18.9mW/°C above +70°C) |                 |
| MAX4660                                    | 1509mW          |
| 8-Pin SO (derate 5.88mW/°C above +70°C)    |                 |
| MAX4659                                    | 471mW           |
| Operating Temperature Ranges               |                 |
| MAX4659/MAX4660                            | -40°C to +85°C  |
| Junction Temperature                       | +150°C          |
| Storage Temperature Range                  | -65°C to +150°C |
| Lead Temperature (soldering, 10s)          | +300°C          |

**Note 1:** Signals on NO, NC, COM, or IN exceeding V+ or V- are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—Dual Supplies

(V+ = +15V, V- = -15V, V<sub>IH</sub> = 2.4V, V<sub>IL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 2, 6)

| PARAMETER                                  | SYMBOL                                                  | CONDITIONS                                                                                                | T <sub>A</sub>                       | MIN | TYP  | MAX | UNITS |
|--------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------|-----|------|-----|-------|
| ANALOG SWITCH                              |                                                         |                                                                                                           |                                      |     |      |     |       |
| Analog Signal Range                        | V <sub>COM</sub> ,<br>V <sub>NO</sub> , V <sub>NC</sub> |                                                                                                           |                                      | V-  |      | V+  | V     |
| On-Resistance                              | R <sub>ON</sub>                                         | I <sub>COM</sub> = 50mA;<br>V <sub>NO</sub> or V <sub>NC</sub> = ±10V                                     | +25°C                                |     | 18   | 25  | Ω     |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> |     |      | 30  |       |
| On-Resistance Matching<br>Between Channels | ΔR <sub>ON</sub>                                        | I <sub>COM</sub> = 50mA;<br>V <sub>NO</sub> or V <sub>NC</sub> = ±10V                                     | +25°C                                |     | 0.4  | 1.2 | Ω     |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> |     |      | 1.5 |       |
| On-Resistance Flatness<br>(Note 3)         | R <sub>FLAT</sub> (ON)                                  | I <sub>COM</sub> = 50mA;<br>V <sub>NO</sub> or V <sub>NC</sub> = -5V, 0, +5V                              | +25°C                                |     | 0.5  | 1.5 | Ω     |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> |     |      | 2   |       |
| NO or NC Off-Leakage<br>Current (Note 4)   | I <sub>NO</sub> (OFF) or<br>I <sub>NC</sub> (OFF)       | V <sub>COM</sub> = -14.5V, +14.5V; V <sub>NO</sub><br>or V <sub>NC</sub> = +14.5V, -14.5V                 | +25°C                                | -1  | 0.01 | 1   | nA    |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> | -10 |      | 10  |       |
| COM On-Leakage<br>Current (Note 4)         | I <sub>COM</sub> (ON)                                   | V <sub>COM</sub> = +14.5V, -14.5V;<br>V <sub>NO</sub> or V <sub>NC</sub> = +14.5V,<br>-14.5V, or floating | +25°C                                | -2  | 0.02 | 2   | nA    |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> | -20 |      | 20  |       |
| DYNAMIC CHARACTERISTICS                    |                                                         |                                                                                                           |                                      |     |      |     |       |
| Transition Time                            | t <sub>TRANS</sub>                                      | V <sub>NO</sub> or V <sub>NC</sub> = 10V;<br>R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF; Figure 3    | +25°C                                |     | 85   | 150 | ns    |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> |     |      | 200 |       |
| Break-Before-Make Delay                    | t <sub>BBM</sub>                                        | V <sub>NO</sub> or V <sub>NC</sub> = 10V;<br>R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF; Figure 3    | +25°C                                | 10  | 20   |     | ns    |
|                                            |                                                         |                                                                                                           | T <sub>MIN</sub> to T <sub>MAX</sub> | 5   |      |     |       |

# High-Current, 25Ω, SPDT, CMOS Analog Switches

MAX4659/MAX4660

## ELECTRICAL CHARACTERISTICS—Dual Supplies (continued)

(V+ = +15V, V- = -15V, V<sub>IH</sub> = 2.4V, V<sub>IL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 2, 6)

| PARAMETER                 | SYMBOL                                      | CONDITIONS                                                                                                                 | T <sub>A</sub>                       | MIN  | TYP   | MAX | UNITS |
|---------------------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------|-------|-----|-------|
| Charge Injection          | Q                                           | V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0, C <sub>L</sub> = 1nF, Figure 4                                                 | +25°C                                |      | 1.5   |     | pC    |
| -3dB Bandwidth            | BW                                          |                                                                                                                            | +25°C                                |      | 225   |     | MHz   |
| Off-Isolation (Note 5)    | V <sub>ISO</sub>                            | f = 1MHz, R <sub>L</sub> = 50Ω, Figure 5                                                                                   | +25°C                                |      | -70   |     | dB    |
| Total Harmonic Distortion | THD                                         | f = 20Hz to 20kHz, V <sub>NL</sub> = 5Vp-p, R <sub>L</sub> = 600Ω                                                          | +25°C                                |      | 0.005 |     | %     |
| Crosstalk                 | V <sub>CROSS</sub>                          | R <sub>L</sub> = 50Ω, C <sub>L</sub> = 5pF, f = 1MHz, Figure 6                                                             | +25°C                                |      | -76   |     | dB    |
| NO or NC Off-Capacitance  | C <sub>NO(OFF)</sub> , C <sub>NC(OFF)</sub> | f = 1MHz, Figure 7                                                                                                         | +25°C                                |      | 6     |     | pF    |
| COM On-Capacitance        | C <sub>COM(ON)</sub>                        | f = 1MHz, Figure 8                                                                                                         | +25°C                                |      | 25    |     | pF    |
| <b>DIGITAL I/O</b>        |                                             |                                                                                                                            |                                      |      |       |     |       |
| Input Logic High          | V <sub>IH</sub>                             |                                                                                                                            | T <sub>MIN</sub> to T <sub>MAX</sub> | 2.4  |       |     | V     |
| Input Logic Low           | V <sub>IL</sub>                             |                                                                                                                            | T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 0.8 | V     |
| Input Leakage Current     | I <sub>IN</sub>                             | V <sub>IN</sub> = 0.8V or 2.4V                                                                                             | T <sub>MIN</sub> to T <sub>MAX</sub> | -1   |       | 1   | μA    |
| <b>POWER SUPPLY</b>       |                                             |                                                                                                                            |                                      |      |       |     |       |
| Power-Supply Range        |                                             |                                                                                                                            | T <sub>MIN</sub> to T <sub>MAX</sub> | ±4.5 |       | ±20 | V     |
| Positive Supply Current   | I <sub>+</sub>                              | V <sub>IN</sub> = 0 or 5V, V <sub>NL</sub> = 3V, I <sub>SWITCH</sub> = 100mA, MAX4660; I <sub>SWITCH</sub> = 50mA, MAX4659 | +25°C                                |      | 135   | 200 | μA    |
|                           |                                             |                                                                                                                            | T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 300 |       |
| Negative Supply Current   | I <sub>-</sub>                              | V <sub>IN</sub> = 0 or 5V, V <sub>NL</sub> = 3V, I <sub>SWITCH</sub> = 100mA, MAX4660; I <sub>SWITCH</sub> = 50mA, MAX4659 | +25°C                                |      | 30    | 50  | μA    |
|                           |                                             |                                                                                                                            | T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 75  |       |
| Ground Current            | I <sub>GND</sub>                            | V <sub>IN</sub> = 0 or 5V, V <sub>NL</sub> = 3V, I <sub>SWITCH</sub> = 100mA, MAX4660; I <sub>SWITCH</sub> = 50mA, MAX4659 | +25°C                                |      | 100   | 175 | μA    |
|                           |                                             |                                                                                                                            | T <sub>MIN</sub> to T <sub>MAX</sub> |      |       | 225 |       |

# High-Current, 25Ω, SPDT, CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS—Single Supply

(V+ = +12V, V- = 0, V<sub>IH</sub> = 2.4V, V<sub>IL</sub> = 0.8V, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Notes 2, 6)

| PARAMETER                                  | SYMBOL                 | CONDITIONS                                                                                                                       | T <sub>A</sub>                       | MIN | TYP | MAX | UNITS |
|--------------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|-----|-----|-----|-------|
| ANALOG SWITCH                              |                        |                                                                                                                                  |                                      |     |     |     |       |
| Analog Signal Range                        | V <sub>IN</sub>        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> | 0   |     | V+  | V     |
| On-Resistance                              | R <sub>ON</sub>        | I <sub>COM</sub> = 25mA;<br>V <sub>NO</sub> or V <sub>NC</sub> = +10V                                                            | +25°C                                |     | 38  | 50  | Ω     |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     |     | 60  |       |
| On-Resistance Matching<br>Between Channels | ΔR <sub>ON</sub>       | I <sub>COM</sub> = 25mA;<br>V <sub>NO</sub> or V <sub>NC</sub> = ±10V                                                            | +25°C                                |     | 0.4 | 2   | Ω     |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     |     | 2.5 |       |
| On-Resistance Flatness<br>(Note 3)         | R <sub>FLAT</sub> (ON) | I <sub>COM</sub> = 25mA;<br>V <sub>NO</sub> or V <sub>NC</sub> = +2V, +6V,<br>+10V                                               | +25°C                                |     | 4   | 7   | Ω     |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     |     | 9   |       |
| DYNAMIC CHARACTERISTICS                    |                        |                                                                                                                                  |                                      |     |     |     |       |
| Transition Time                            | t <sub>TRANS</sub>     | V <sub>NO</sub> or V <sub>NC</sub> = 10V;<br>R <sub>L</sub> = 300Ω;<br>C <sub>L</sub> = 35pF, Figure 2                           | +25°C                                |     | 120 | 200 | ns    |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     |     | 250 |       |
| Break-Before-Make Delay                    | t <sub>BBM</sub>       | V <sub>NO</sub> or V <sub>NC</sub> = 10V;<br>R <sub>L</sub> = 300 Ω;<br>C <sub>L</sub> = 35pF, Figure 2                          | +25°C                                |     | 20  | 50  | ns    |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     | 10  |     |       |
| Charge Injection                           | Q                      | V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0,<br>C <sub>L</sub> = 1nF, Figure 4                                                    | +25°C                                |     | 1   |     | pC    |
| POWER SUPPLY                               |                        |                                                                                                                                  |                                      |     |     |     |       |
| Power-Supply Range                         | V+                     |                                                                                                                                  |                                      | +9  |     | +40 | V     |
| Positive Supply Current                    | I+                     | V <sub>IN</sub> = 0 or 12V, V <sub>N-</sub> = 3V;<br>I <sub>SWITCH</sub> = 50mA, MAX4660;<br>I <sub>SWITCH</sub> = 25mA, MAX4659 | +25°C                                |     | 50  | 100 | μA    |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     |     | 125 |       |
|                                            |                        | V <sub>IN</sub> = 5V, V <sub>N-</sub> = 3V;<br>I <sub>SWITCH</sub> = 50mA, MAX4660;<br>I <sub>SWITCH</sub> = 25mA, MAX4659       | +25°C                                |     | 70  | 125 |       |
|                                            |                        |                                                                                                                                  | T <sub>MIN</sub> to T <sub>MAX</sub> |     |     | 150 |       |

**Note 2:** The algebraic convention is used in this data sheet; the most negative value is shown in the minimum column.

**Note 3:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.

**Note 4:** Leakage parameters are 100% tested at maximum-rated hot temperature and guaranteed by correlation at T<sub>A</sub> = +25°C.

**Note 5:** Off-isolation = 20log<sub>10</sub> [V<sub>COM</sub> / (V<sub>NC</sub> or V<sub>NO</sub>)], V<sub>COM</sub> = output, V<sub>NC</sub> or V<sub>NO</sub> = input to off switch.

**Note 6:** -40°C specifications are guaranteed by design.


# High-Current, 25 $\Omega$ , SPDT, CMOS Analog Switches

## Typical Operating Characteristics


( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

MAX4659/MAX4660


**ON-RESISTANCE vs.  $V_{\text{COM}}$   
(DUAL SUPPLIES)**

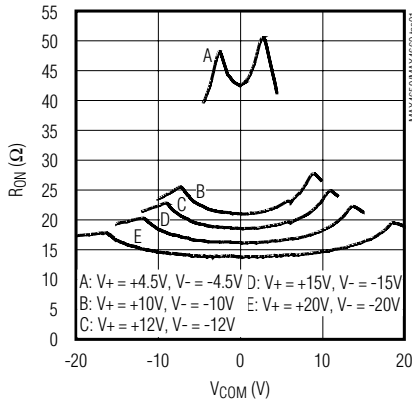


**ON-RESISTANCE vs.  $V_{\text{COM}}$   
(SINGLE SUPPLY)**

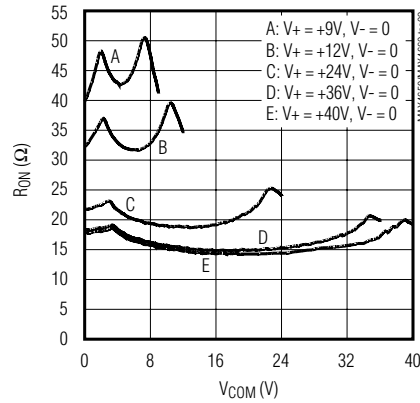


**ON-RESISTANCE vs.  $V_{\text{COM}}$   
AND TEMPERATURE (DUAL SUPPLIES)**

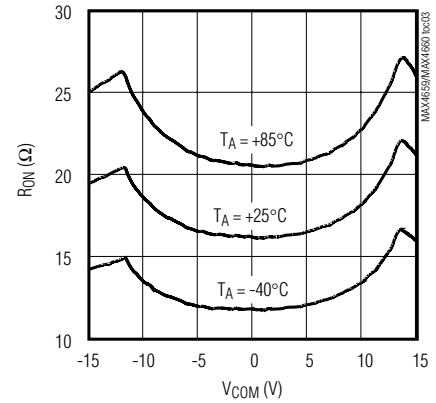


**ON-RESISTANCE vs.  $V_{\text{COM}}$   
AND TEMPERATURE (SINGLE SUPPLY)**

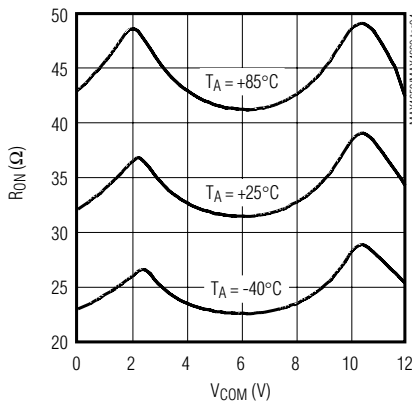


**LEAKAGE CURRENT  
vs. TEMPERATURE**

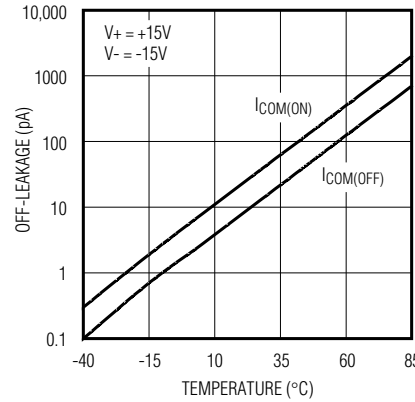


**CHARGE INJECTION  
vs.  $V_{\text{COM}}$**

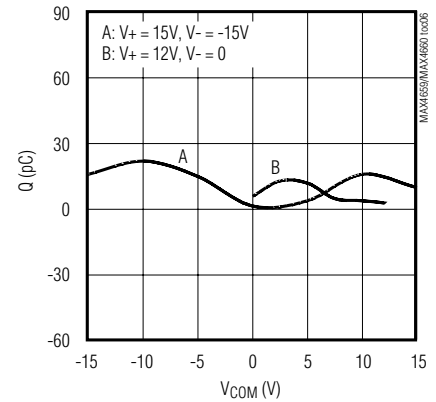


**SUPPLY CURRENT vs. SUPPLY VOLTAGE  
(SINGLE SUPPLY)**

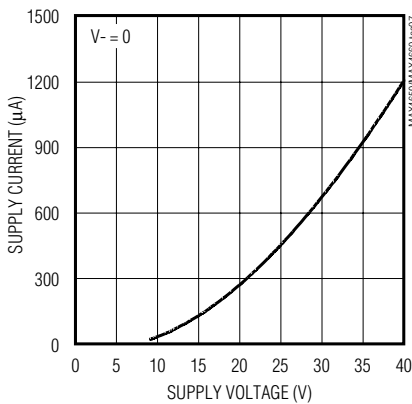

**SUPPLY CURRENT vs. SUPPLY VOLTAGE  
AND TEMPERATURE**


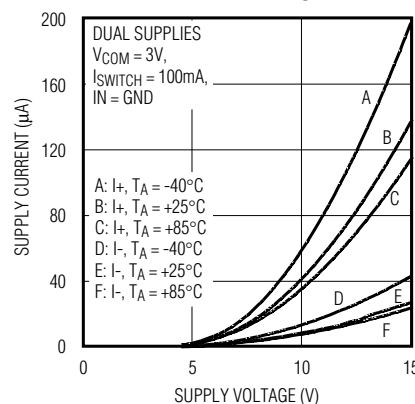


**TOTAL HARMONIC DISTORTION  
vs. FREQUENCY**

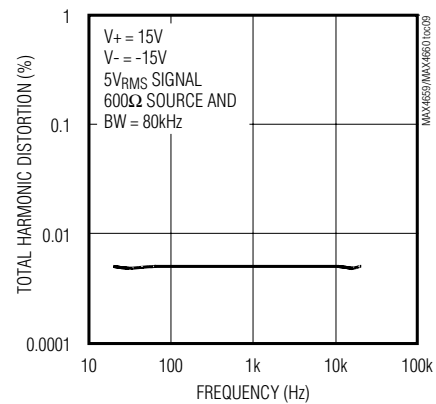

# MAX4659/MAX4660

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

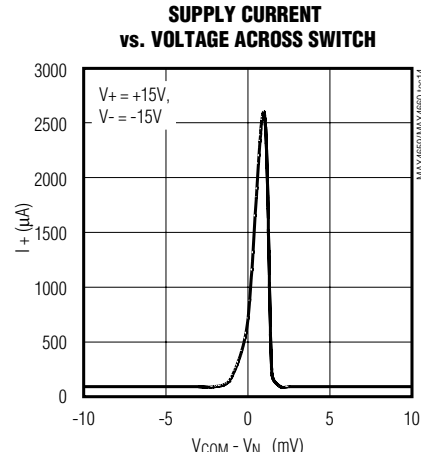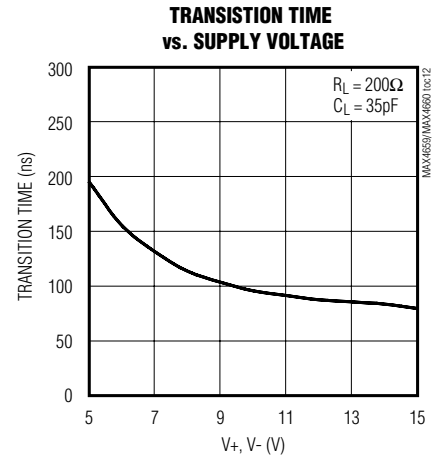

| PIN | NAME | FUNCTION                                                                |
|-----|------|-------------------------------------------------------------------------|
| 1   | COM  | Analog Switch Common                                                    |
| 2   | NC   | Normally Closed Switch Terminal. NC is connected to COM when IN is low. |
| 3   | GND  | Ground                                                                  |
| 4   | V+   | Positive Supply Voltage Input                                           |
| 5   | N.C. | No Connection                                                           |
| 6   | IN   | Digital Control Input                                                   |
| 7   | V-   | Negative Supply Voltage Input                                           |
| 8   | NO   | Normally Open Switch Terminal. NO is connected to COM when IN is high.  |
| —   | EP   | Exposed Paddle. Connect EP to V+ or leave unconnected.                  |

# High-Current, 25 $\Omega$ , SPDT, CMOS Analog Switches

## Detailed Description

The MAX4659/MAX4660 are single, single-pole/double-throw (SPDT) CMOS analog switches. The CMOS switch construction provides rail-to-rail signal handling while consuming very little power. The switch is controlled by a TTL/CMOS level compatible digital input. The MAX4659/MAX4660 have a normally open switch and a normally closed switch.

These devices can be operated with either single power supplies or dual power supplies. Operation at up to  $\pm 20\text{V}$  supplies allows users a wide switching dynamic range. Additionally, asymmetrical operation is possible to tailor performance to a particular application.

These switches have been specifically designed to handle high switch currents, up to 200mA peak current and 150mA continuous currents. In order to do this, a new technique is used to drive the body of the output N-channel device. (Note: The basic switch between the input, NC/NO terminal and the output common terminal consists of an N-channel MOSFET and a P-channel MOSFET in parallel.) The standard method limits operation to approximately a 600mV drop across the switch. More than 600mV causes an increase in  $I_{\text{DON}}$  leakage current (due to the turn-on of on-chip parasitic diodes), and an increase in  $V_+$  supply current. With this new sensing method, there is no limitation to the voltage drop across the switch. Current and voltage are limited only by the power dissipation rating of the package and the absolute maximum ratings of the switch.

When the analog input voltage drop is approximately 7mV there is an increase in power supply current from 90 $\mu\text{A}$  to 2mA (typ) within a 1mV to 7mV range, caused by the new sensing/driving circuitry.

## Applications Information

### Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings, because stresses beyond the listed ratings can cause permanent damage to the devices. First, connect GND, followed by  $V_+$ ,  $V_-$ , and the remaining pins. If power-supply sequencing is not possible, add two small-signal diodes (D1, D2) in series with

supply pins (Figure 1). Adding diodes reduces the analog signal range to one diode drop below  $V_+$  and one diode drop above  $V_-$ , but does not affect the devices' low switch resistance and low leakage characteristics. Device operation is unchanged, and the difference between  $V_+$  and  $V_-$  should not exceed 44V. The protection diode for the negative supply is not required when  $V_-$  is connected to GND.

### Off-Isolation at High Frequencies

In 50 $\Omega$  systems, the high-frequency on-response of these parts extends from DC to above 100MHz, with a typical loss of -2dB. When the switch is turned off, however, it behaves like a capacitor and off-isolation decreases with increasing frequency. This effect is more pronounced with higher source and load impedances. Above 5MHz, circuit board layout becomes critical. The graphs shown in the *Typical Operating Characteristics* were taken using a 50 $\Omega$  source and load connected with BNC connectors.

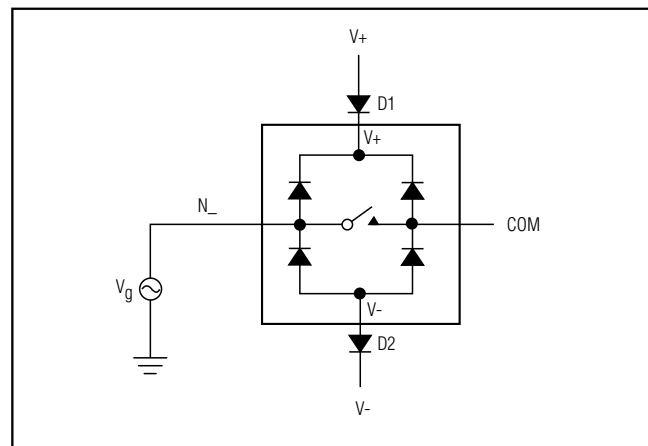


Figure 1. Overvoltage Protection Using Blocking Diodes

# High-Current, 25Ω, SPDT, CMOS Analog Switches

## Test Circuits/Timing Diagrams

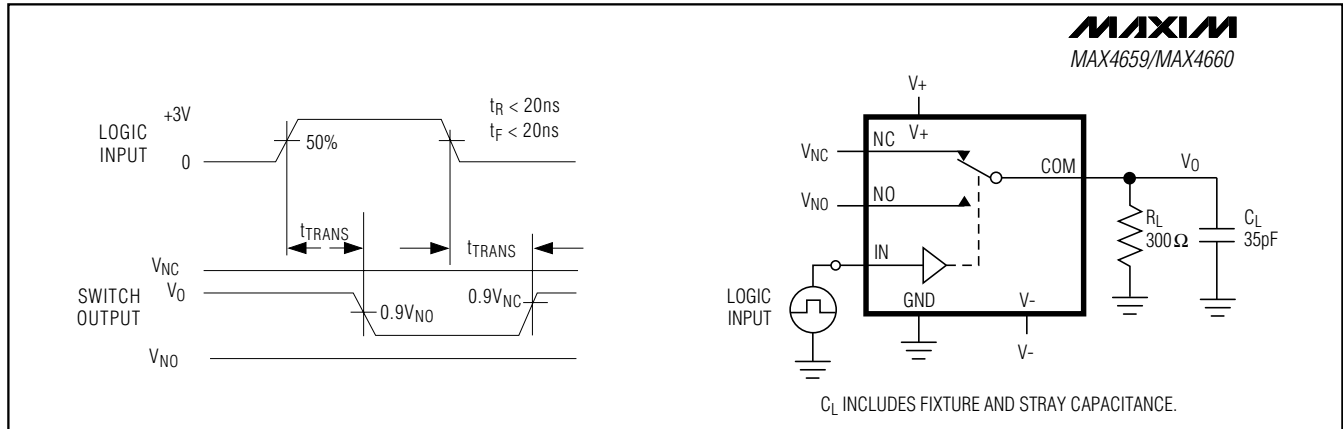


Figure 2. Functional Diagram

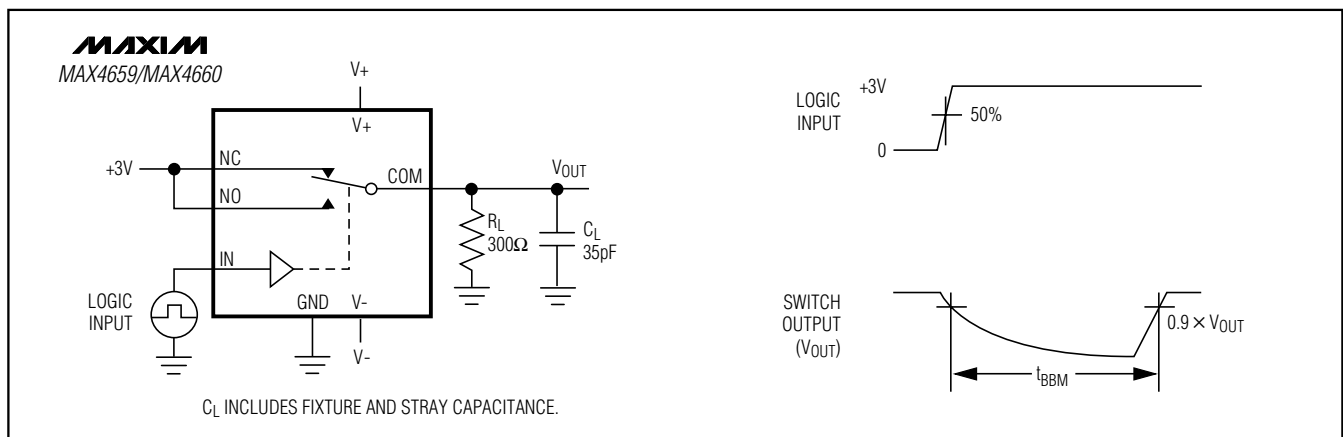


Figure 3. Break-Before-Make Time

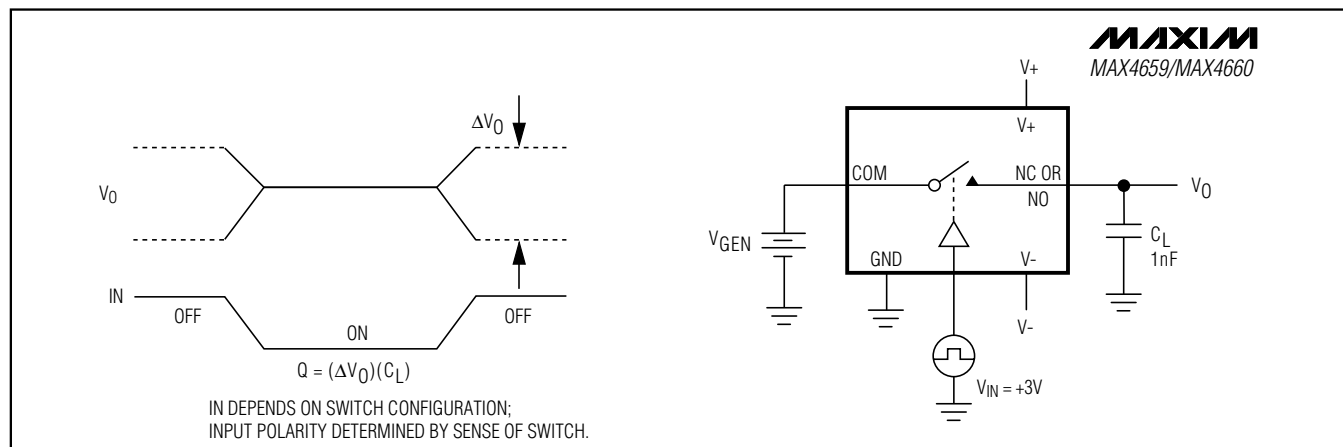


Figure 4. Charge Injection

# High-Current, 25 $\Omega$ , SPDT, CMOS Analog Switches

## Test Circuits/Timing Diagrams (continued)

MAX4659/MAX4660

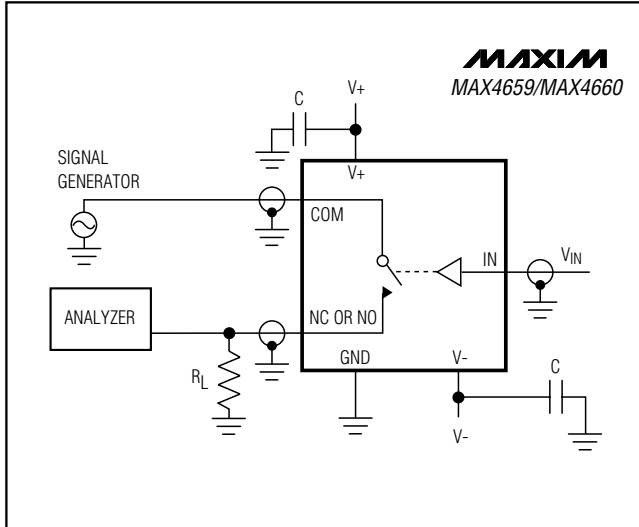


Figure 5. Off-Isolation

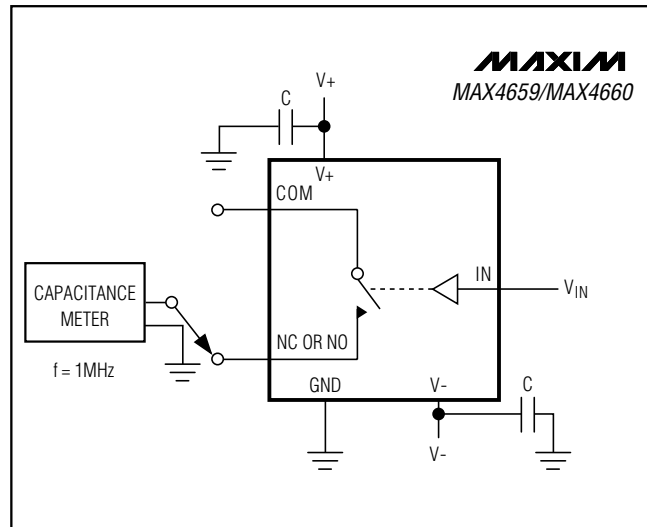


Figure 7. Channel Off-Capacitance

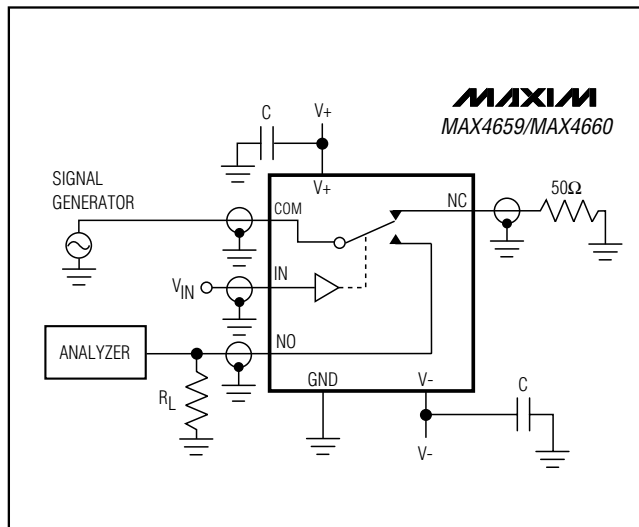


Figure 6. Crosstalk

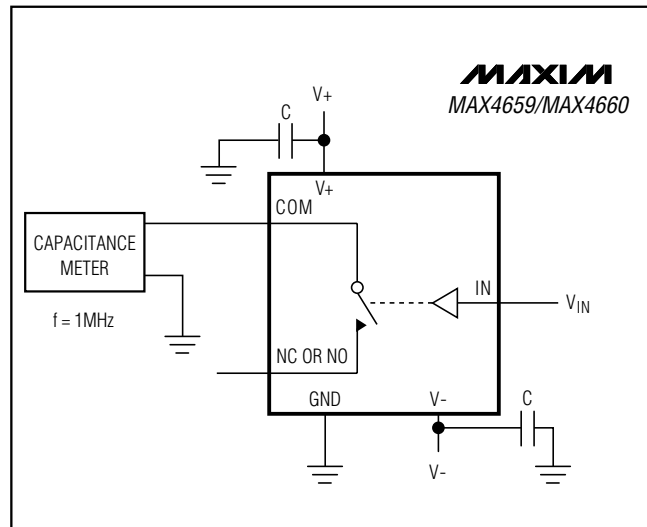


Figure 8. Channel On-Capacitance

## Chip Information


TRANSISTOR COUNT: 45

PROCESS: CMOS

# High-Current, 25 $\Omega$ , SPDT, CMOS Analog Switches

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

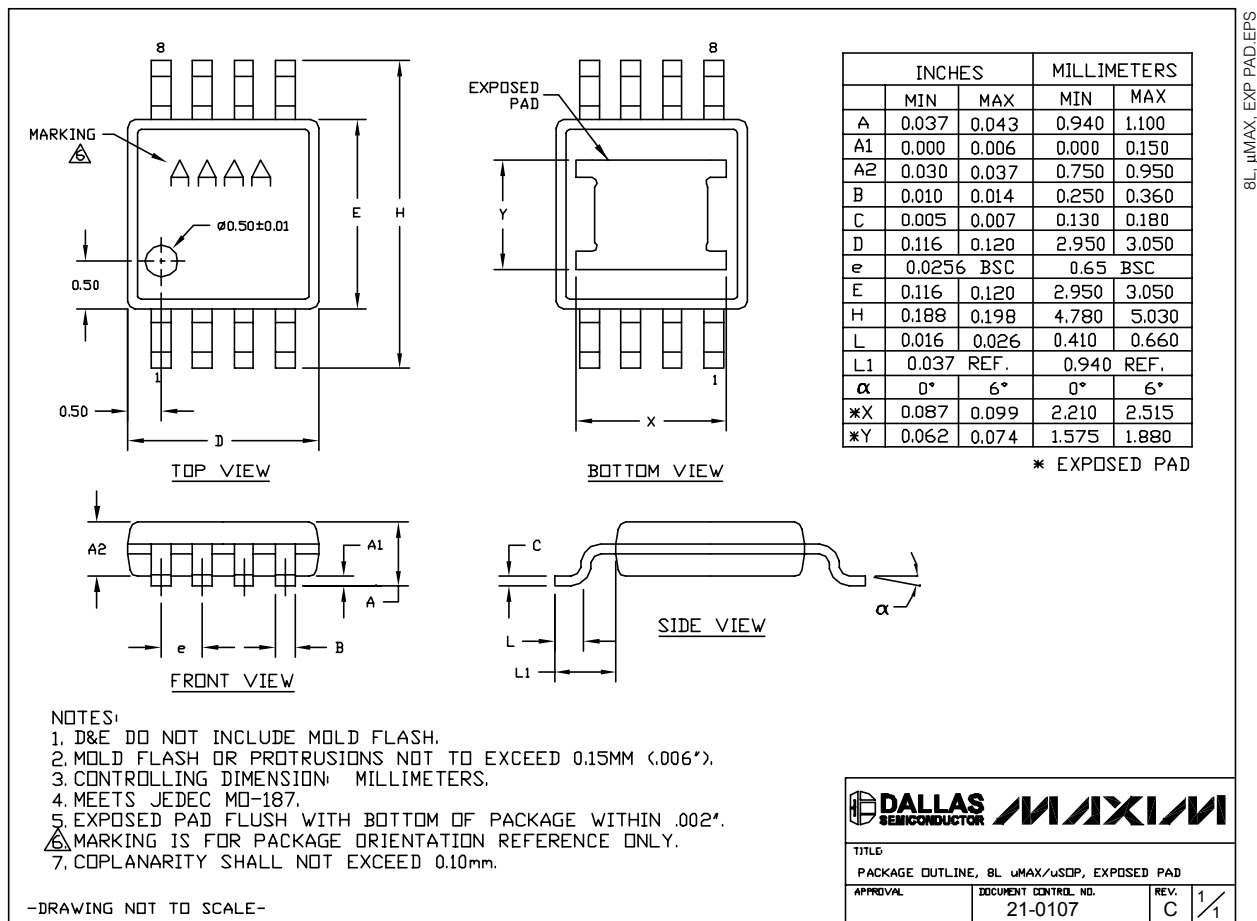


8L,  $\mu$ MAX, EXP PAD EPS

# High-Current, 25Ω, SPDT, CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

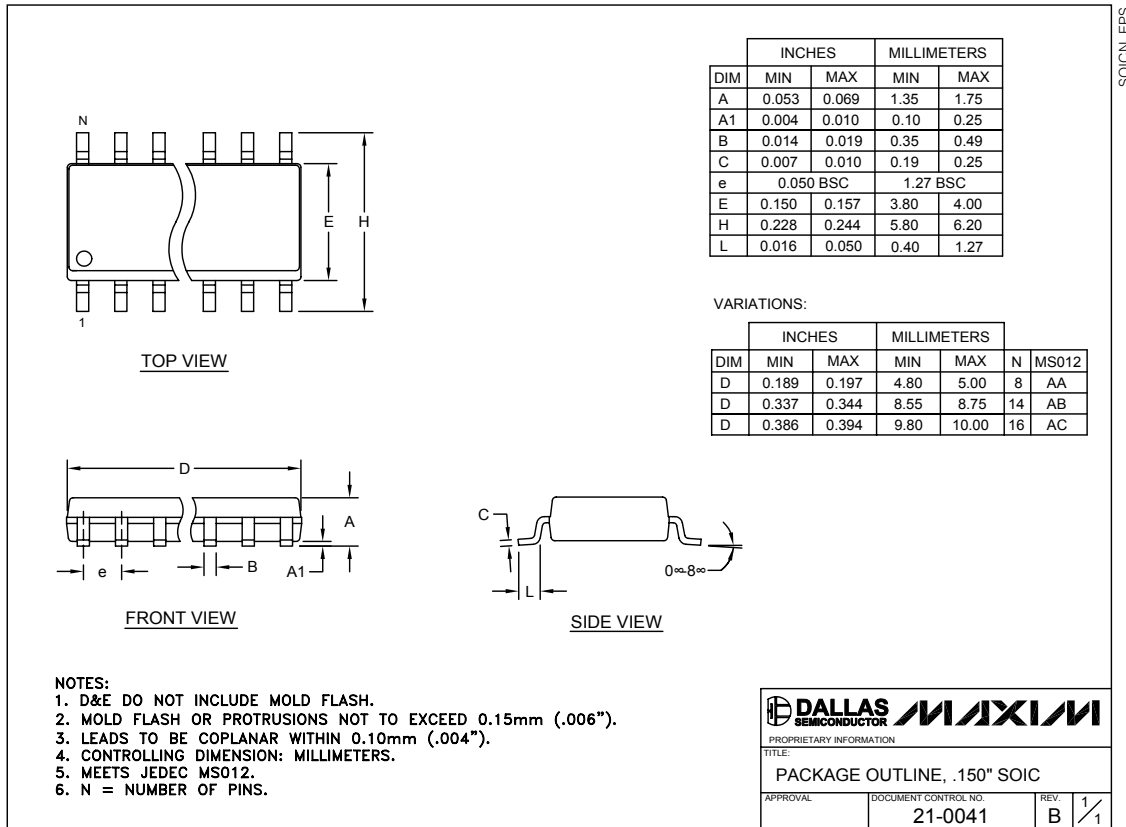


MAX4659/MAX4660

# High-Current, 25 $\Omega$ , SPDT, CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

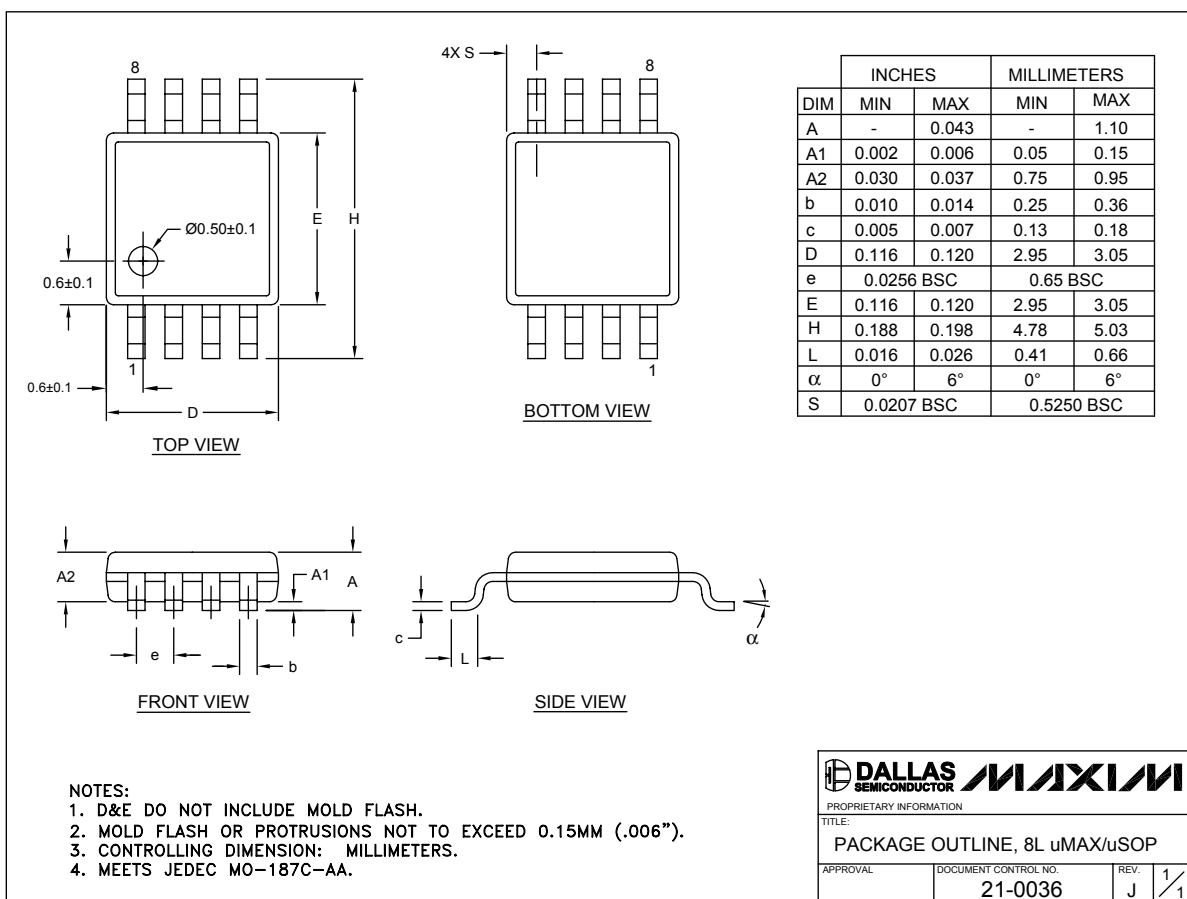

8LUMAXD EPS

## Revision History

Pages changed at Rev 1: 1, 6, 12

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2007 Maxim Integrated Products

**MAXIM** is a registered trademark of Maxim Integrated Products, Inc.