

Schottky Bridge Rectifiers

MBFH22S--MBFH24S

Features

- Metal silicon junction, majority carrier conduction
- High surge capability
- High temperature soldering guaranteed:
260°C/10 seconds
- High current capability, low forward voltage drop
- Guarding for over voltage protection
- RoHS Compliant



Mechanical Data

- Case: MBF molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity: Color band denotes cathode end

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	MBFH22S	MBFH24S	Units
Peak repetitive reverse voltage	V _{RRM}	20	40	V
RMS reverse voltage	V _{RMS}	14	28	V
DC blocking voltage	V _{DC}	20	40	V
Maximum average forward output current	I _{F(AV)}	2.0		A
Peak forward surge current, 8.3ms single half-sine-wave	I _{FSM}	50		A

Thermal Characteristics

Parameter	Symbol	MBFH22S	MBFH24S	Units
Typical thermal resistance per leg (Note 1)	R _{ΘJA}	72		°C/W
	R _{ΘJC}	31		
	R _{ΘJL}	15		
Operating junction temperature range	T _J	- 55 ---- + 150		°C
Storage temperature range	T _{STG}	- 55 ---- + 150		°C

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Schottky Bridge Rectifiers

MBFH22S--MBFH24S

Electrical Characteristics (@T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage	V _F	I _F =2.0A Per Diode	@T _A =25°C	--	0.55	V
Maximum Reverse current	I _R	Rated V _R , Per Diode	@T _A =25°C	--	500	μ A
			@T _A =100°C	--	20	m A

Note:

- 1.Pulse test: 300us pulse width, 1 % duty cycle
- 2.Pulse test: Pulse width 40ms

Schottky Bridge Rectifiers

MBFH22S--MBFH24S

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

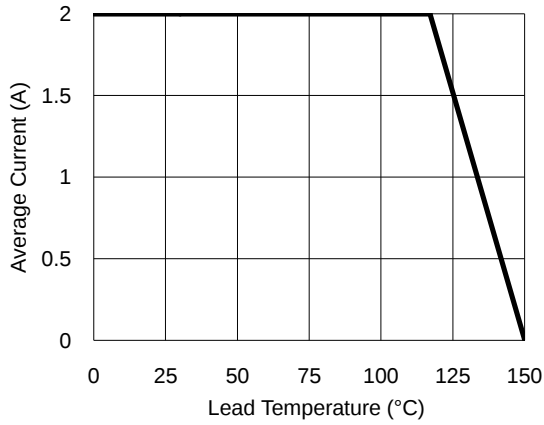


Fig.2- Surge Current Derating Curve

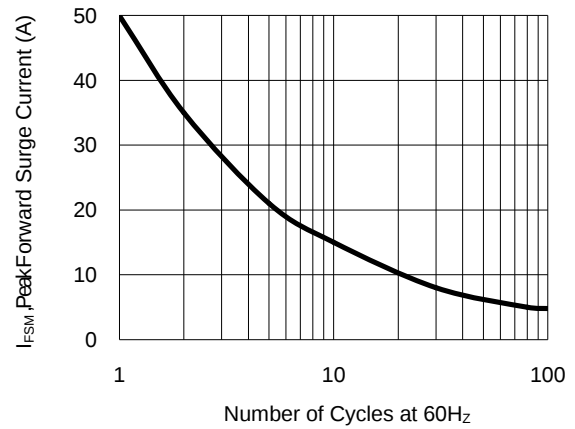


Fig.3- Typical Forward Voltage Characteristic


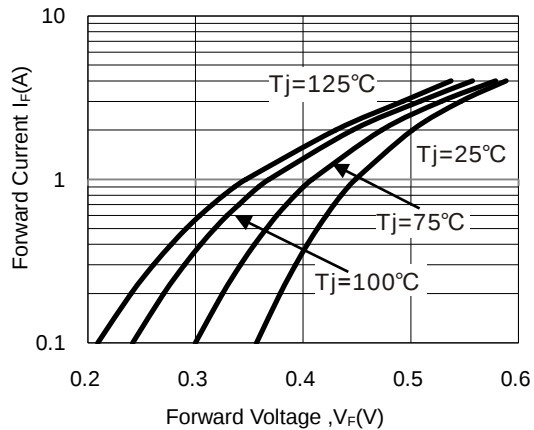



Fig.4- Typical Reverse Characteristic

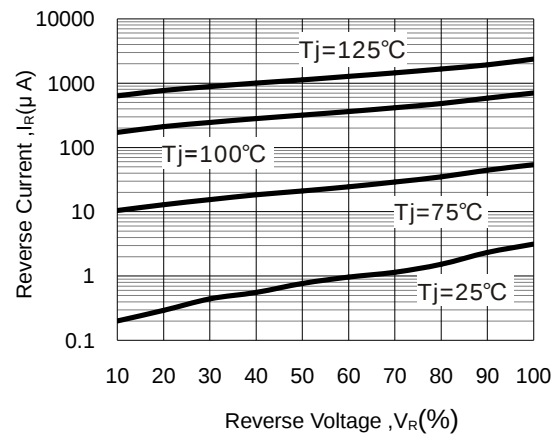


Schottky Bridge Rectifiers

MBFH22S--MBFH24S

Package Outline Dimensions(unit:mm)

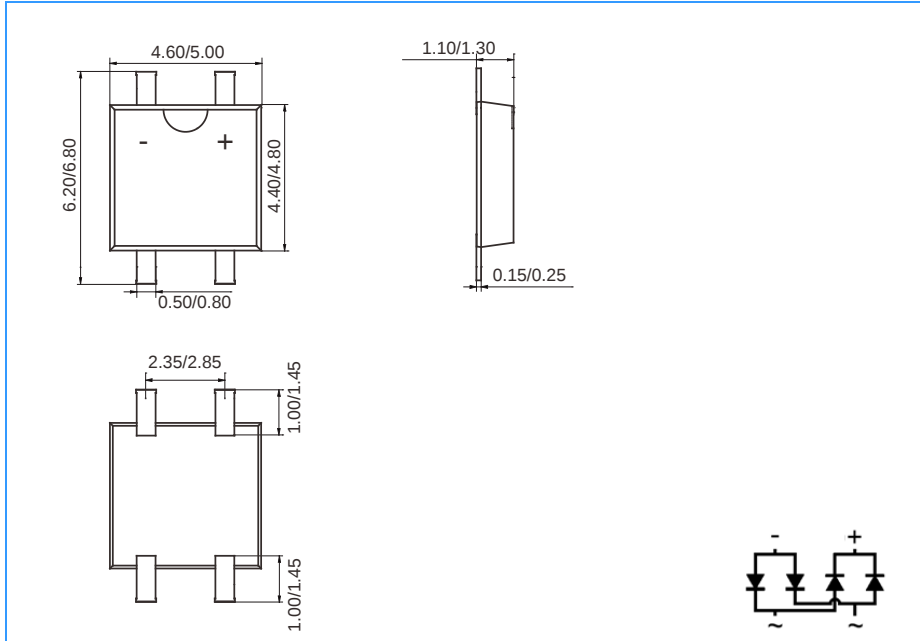

Mounting Pad Layout(unit:mm)

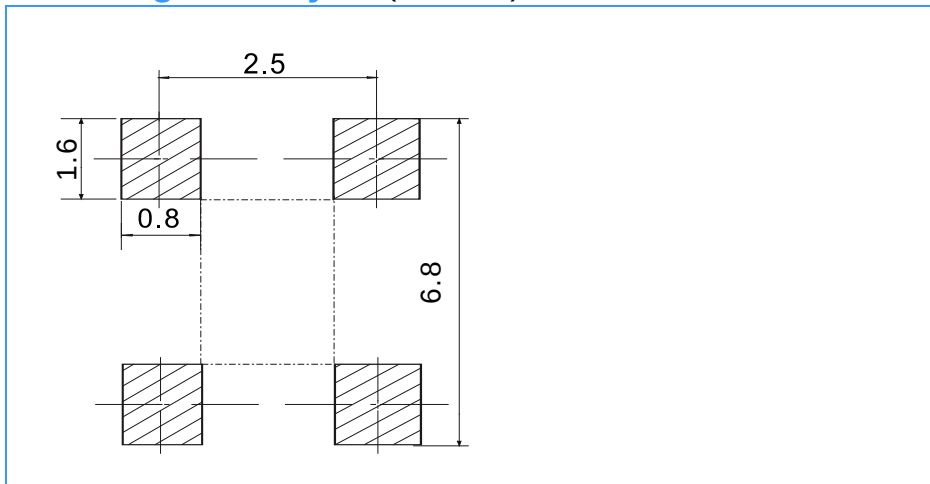

Ordering Information

Part No.	Marking	Package	Shipping
MBFH22S	MBFH22S	MBF	5000/Tape&Reel
MBFH24S	MBFH24S	MBF	5000/Tape&Reel