




## 15A Schottky Barrier Rectifier

### Features

- Schottky barrier chip
- Guard ring die construction for transient protection
- Low power loss, high efficiency
- High current capability and low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection application
- Plastic material – UL Recognition flammability classification 94V–0

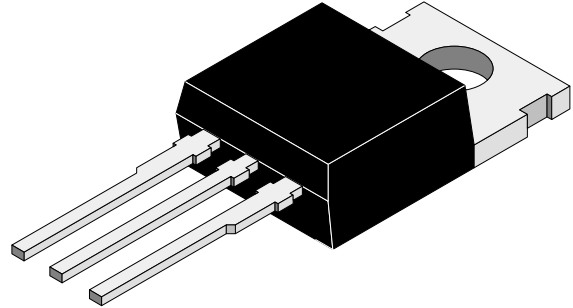

95 9630

### Absolute Maximum Ratings

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Value	Unit
Repetitive peak reverse voltage =Working peak reverse voltage =DC Blocking voltage		MBR1530CT	$V_{RRM}$ $=V_{RWM}$ $=V_R$	30	V
		MBR1535CT		35	V
		MBR1540CT		40	V
		MBR1545CT		45	V
		MBR1550CT		50	V
		MBR1560CT		60	V
Peak forward surge current			$I_{FSM}$	150	A
Average forward current	$T_C=125^\circ\text{C}$		$I_{FAV}$	15	A
Junction and storage temperature range			$T_j=T_{stg}$	-65...+150	$^\circ\text{C}$

# MBR1530CT–MBR1560CT

Vishay Lite-On Power Semiconductor



## Electrical Characteristics

$T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Type	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F=7.5\text{A}, T_C=125^\circ\text{C}$	MBR1530CT	$V_F$			0.57	V
	$I_F=15\text{A}, T_C=25^\circ\text{C}$	–MBR1545CT	$V_F$			0.84	V
	$I_F=15\text{A}, T_C=125^\circ\text{C}$		$V_F$			0.72	V
	$I_F=7.5\text{A}, T_C=125^\circ\text{C}$	MBR1550CT	$V_F$			0.65	V
	$I_F=15\text{A}, T_C=25^\circ\text{C}$	–MBR1560CT	$V_F$			0.90	V
	$I_F=15\text{A}, T_C=125^\circ\text{C}$		$V_F$			0.80	V
Reverse current	$T_C=25^\circ\text{C}$	MBR1530CT	$I_R$			0.1	mA
	$T_C=125^\circ\text{C}$	–MBR1545CT	$I_R$			15	mA
	$T_C=25^\circ\text{C}$	MBR1550CT	$I_R$			1.0	mA
	$T_C=125^\circ\text{C}$	–MBR1560CT	$I_R$			50	mA
Diode capacitance	$V_R=4\text{V}, f=1\text{MHz}$		$C_D$		300		pF
Thermal resistance junction to case	$T_L=\text{const.}$		$R_{thJC}$		1.7		K/W
Voltage rate of change (Rated $V_R$ )		MBR1530CT –MBR1540CT	dV/dt			1000	K/W
		MBR1545CT –MBR1560CT	dV/dt			10000	K/W

## Characteristics ( $T_j = 25^\circ\text{C}$ unless otherwise specified)

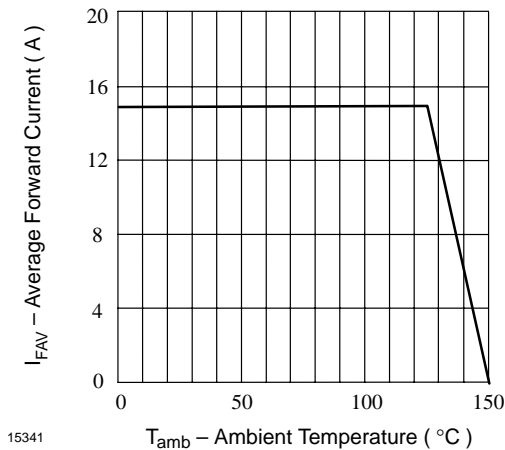


Figure 1. Max. Average Forward Current vs. Ambient Temperature


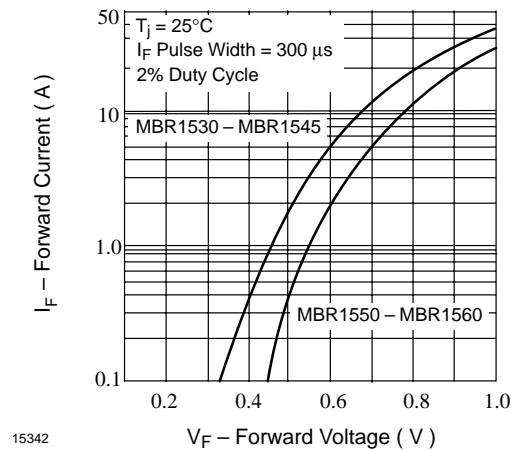


Figure 2. Typ. Forward Current vs. Forward Voltage




# MBR1530CT–MBR1560CT

## Vishay Lite-On Power Semiconductor

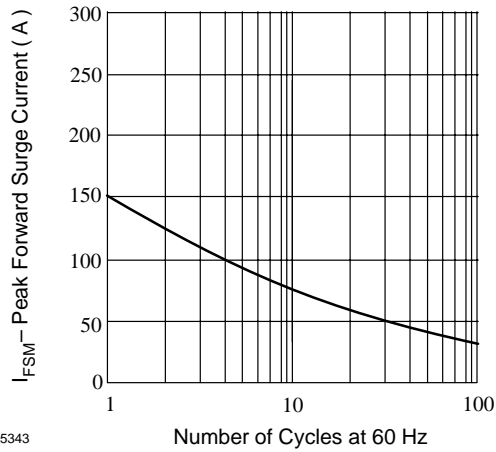


15343

Figure 3. Max. Peak Forward Surge Current vs. Number of Cycles

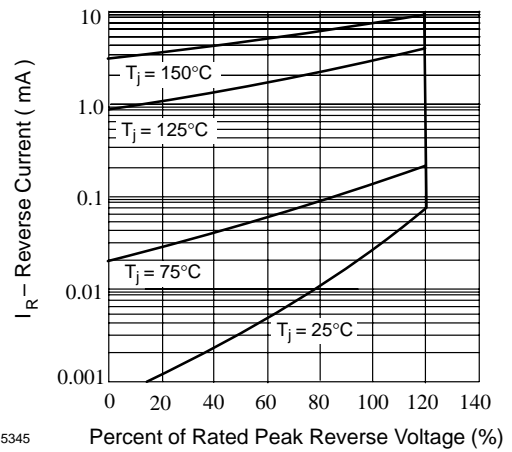

15345

Figure 5. Typ. Reverse Current vs. Percent of Rated Peak Reverse Voltage

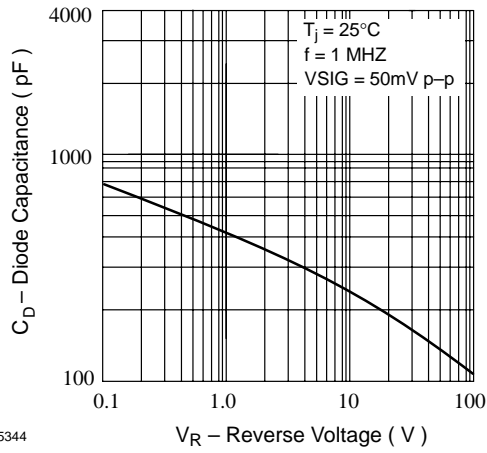

15344


Figure 4. Typ. Diode Capacitance vs. Reverse Voltage

# MBR1530CT–MBR1560CT


Vishay Lite-On Power Semiconductor



## Dimensions in mm

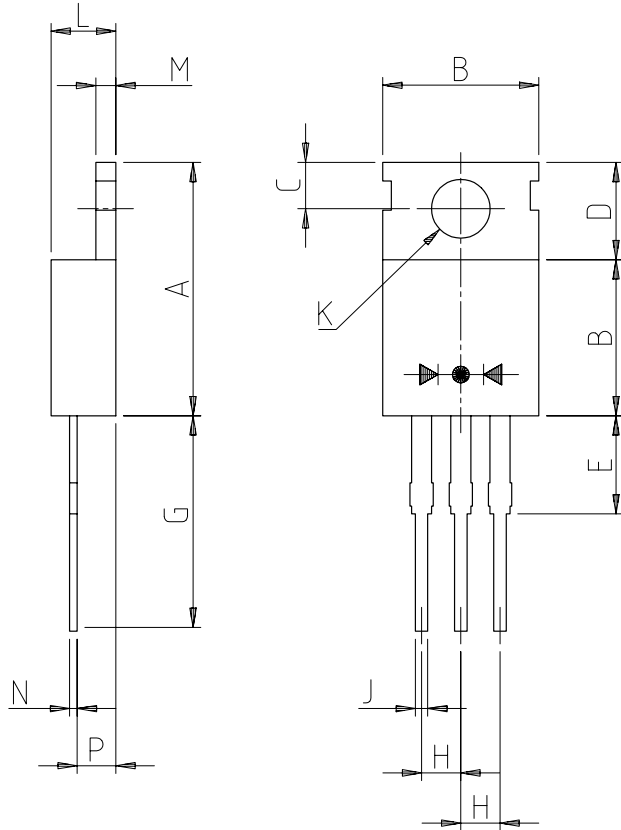

TO-220AB		
Dim	Min	Max
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	-	6.25
G	12.70	14.73
H	2.29	2.79
J	0.51	1.14
K	∅3.53	∅4.09
L	3.56	4.83
M	1.14	1.40
N	0.30	0.64
P	2.03	2.92
All Dimensions in mm		



technical drawings  
according to DIN  
specifications

14468

Case: molded plastic  
Polarity: as marked on body  
Approx. weight: 2.24 grams  
Mounting position: any  
Marking: type number



## **Ozone Depleting Substances Policy Statement**

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0) 7131 67 2831, Fax number: 49 (0) 7131 67 2423