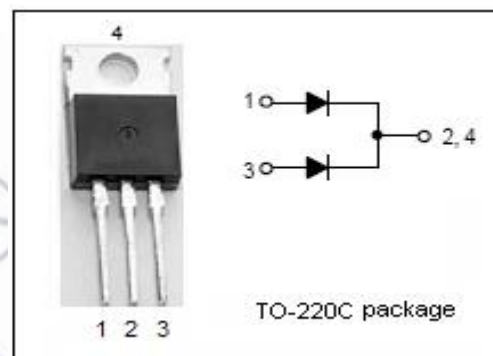


Schottky Barrier Rectifier**MBR3045CT****FEATURES**


- Dual Rectifier Conduction, Positive Center Tap
- Low Power Loss/High Efficiency
- High Current Capability, Low Forward Voltage Drop
- High Surge Capacity
- Guarding for Overvoltage protection
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications

**MECHANICAL CHARACTERISTICS**

- Case: Epoxy, Molded
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- High Temperature Soldering Guaranteed:
250°C Max. for 10 Seconds

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{RRM} V_{RMS} V_R	Peak Repetitive Reverse Voltage RMS Voltage DC Blocking Voltage	45	V
$I_{F(AV)}$	Average Rectified Forward Current (Per Leg) (Total)	15 30	A
I_{FSM}	Nonrepetitive Peak Surge Current 8.3ms single half sine-wave superimposed on rated load conditions	250	A
I_{RRM}	Peak Repetitive Reverse Surge Current (2 μ S - 1Khz)	2	A
T_J	Junction Temperature	-55~150	°C
T_{stg}	Storage Temperature Range	-55~150	°C

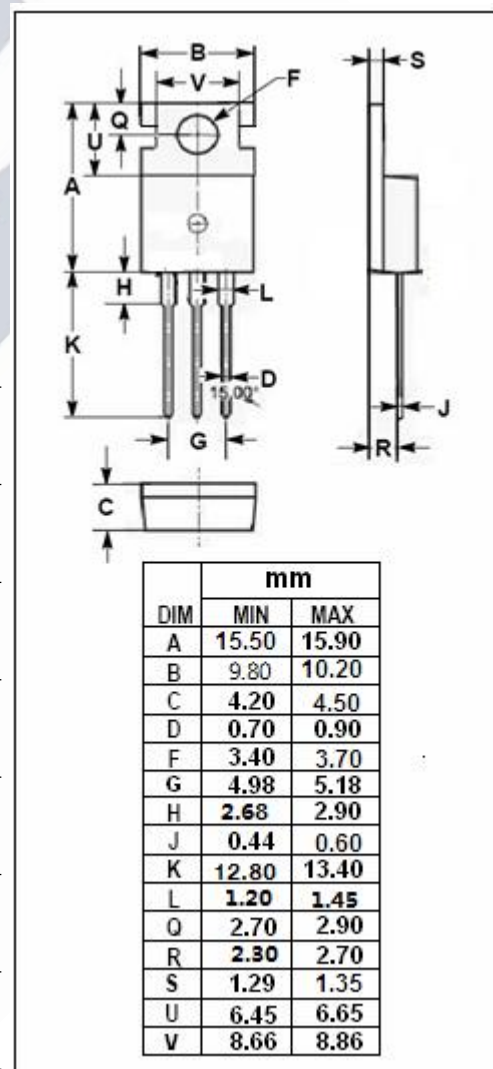

Schottky Barrier Rectifier**MBR3045CT****THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.5	$^{\circ}\text{C}/\text{W}$

ELECTRICAL CHARACTERISTICS (Pulse Test: Pulse Width $\leq 300\ \mu\text{s}$, Duty Cycle $\leq 1\%$)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_F	Maximum Instantaneous Forward Voltage	$I_F = 15\text{A}$; $T_C = 25^{\circ}\text{C}$	0.66	V
I_R	Maximum Instantaneous Reverse Current	Rated DC Voltage, $T_C = 25^{\circ}\text{C}$	50	μA