

International
IR Rectifier

MBR4045CT
MBRB4045CT
MBR4045CT-1

SCHOTTKY RECTIFIER

40 Amp

Major Ratings and Characteristics




Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform (Per Device)	40	A
I_{FRM} @ $T_C = 118^\circ\text{C}$ (Per Leg)	40	A
V_{RRM}	45	V
I_{FSM} @ $t_p = 5\mu\text{s}$ sine	900	A
V_F @ 20Apk, $T_J = 125^\circ\text{C}$	0.58	V
T_J range	-65 to 150	$^\circ\text{C}$

Description/Features

This center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C T_J operation
- Center tap TO-220, D²Pak and TO-262 packages
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

MBR4045CT	MBRB4045CT	MBR4045CT-1
  TO-220AB	  D²PAK	  TO-262

Voltage Ratings

Parameters	MBR4045CT MBRB4045CT MBR4045CT-1
V_R Max. DC Reverse Voltage (V)	45
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	Values	Units	Conditions
$I_{F(AV)}$ Max. Average Forward (PerLeg) Current (Per Device)	20 40	A	@ $T_C = 118^\circ\text{C}$, (Rated V_R)
I_{FRM} Peak Repetitive Forward Current (Per Leg)	40	A	Rated V_R , square wave, 20kHz $T_C = 118^\circ\text{C}$
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	900 210	A	5 μs Sine or 3 μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RRM} applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	20	A	$T_J = 25^\circ\text{C}$, $I_{AS} = 3\text{Amps}$, $L = 4.40\text{mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	Values	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1)	0.60 0.78 0.58 0.75	V	@ 20A @ 40A @ 20A @ 40A $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$
I_{RM} Max. Instantaneous Reverse Current (1)	1 50 95	mA	$T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$ $T_J = 125^\circ\text{C}$ Rated DC voltage
C_T Max. Junction Capacitance	900	pF	$V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance	8.0	nH	Measured from top of terminal to mounting plane
dv/dt Max. Voltage Rate of Change (Rated V_R)	10,000	V/ μs	

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters	Values	Units	Conditions
T_J Max. Junction Temperature Range	-65 to 150	$^\circ\text{C}$	
T_{stg} Max. Storage Temperature Range	-65 to 175	$^\circ\text{C}$	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	1.5	$^\circ\text{C/W}$	DC operation
R_{thCS} Typical Thermal Resistance Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased Only for TO-220
R_{thJA} Max. Thermal Resistance Junction to Ambient	50	$^\circ\text{C/W}$	DC operation For D ² Pak and TO-262
w_t Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque Min. Max.	6 (5) 12 (10)	Kg-cm (lbf-in)	Non-lubricated threads

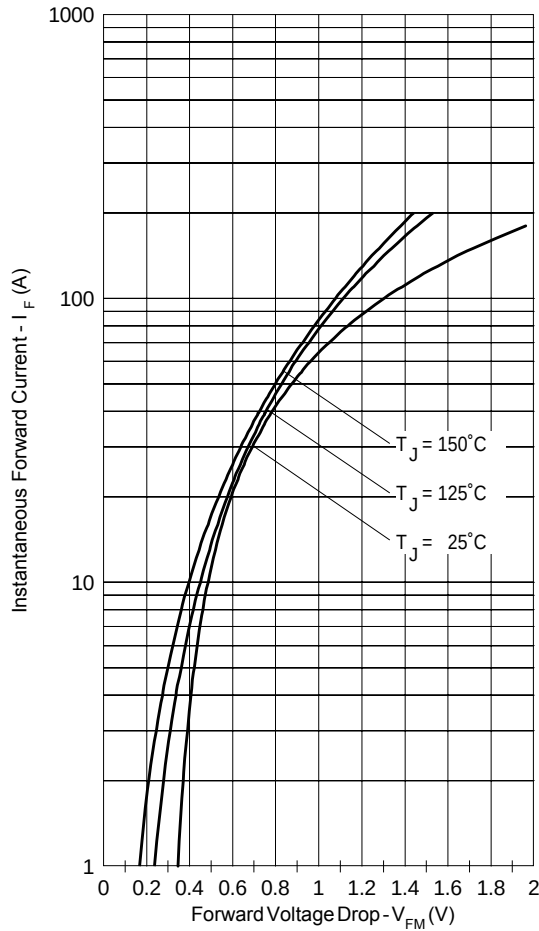


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

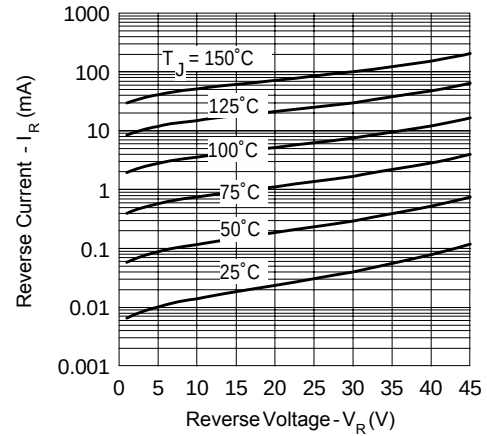


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

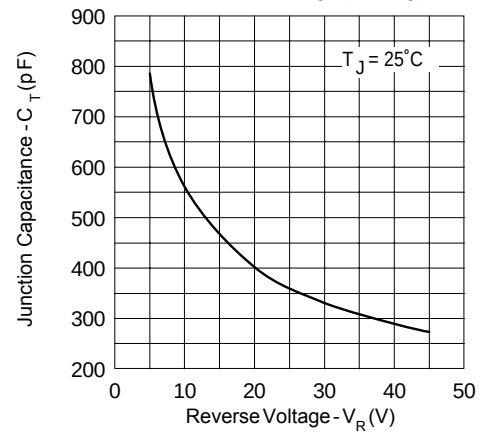


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

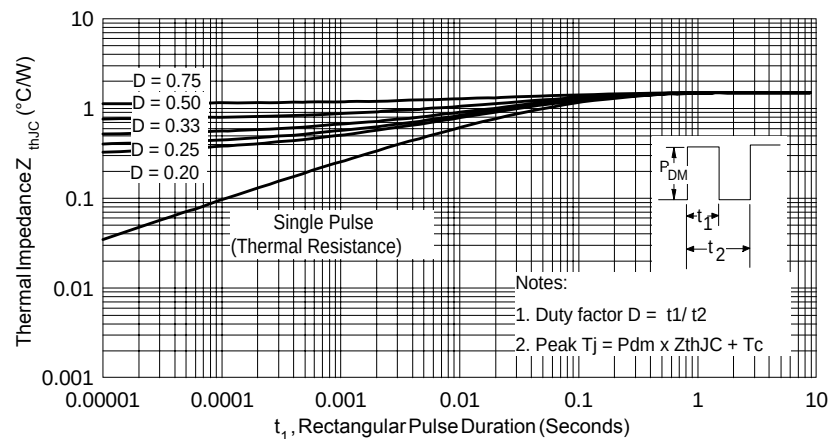


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

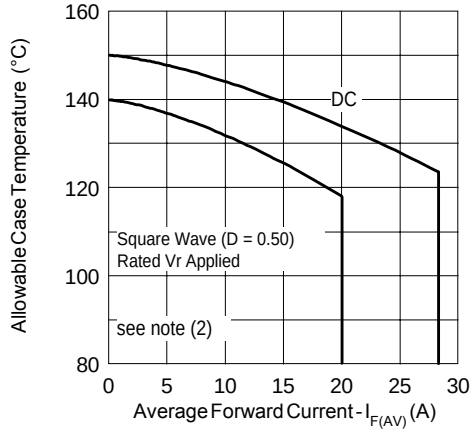


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

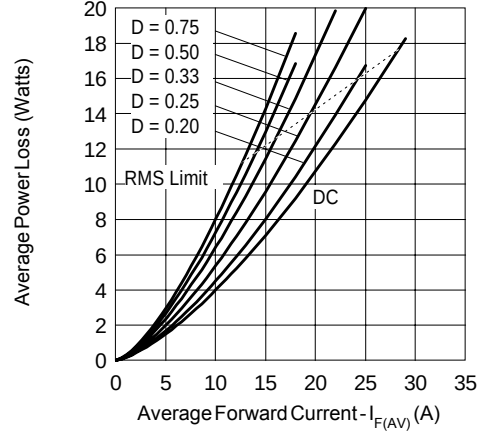


Fig. 6 - Forward Power Loss Characteristics

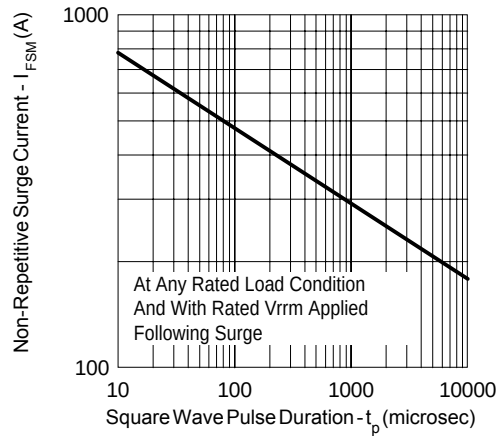




Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$


P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = rated V_R


Outline Table

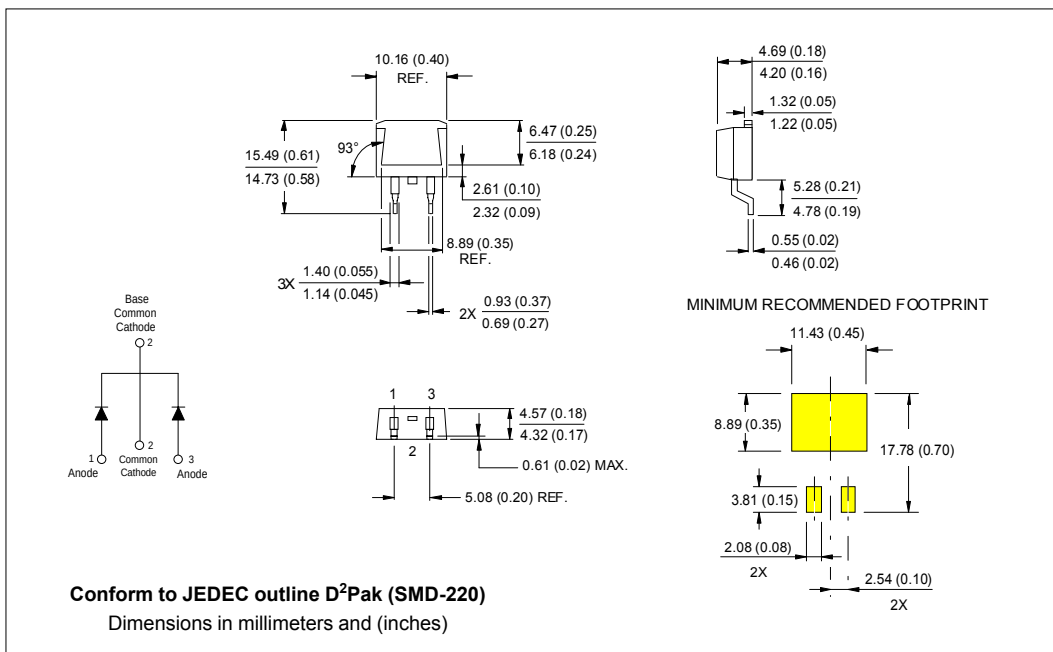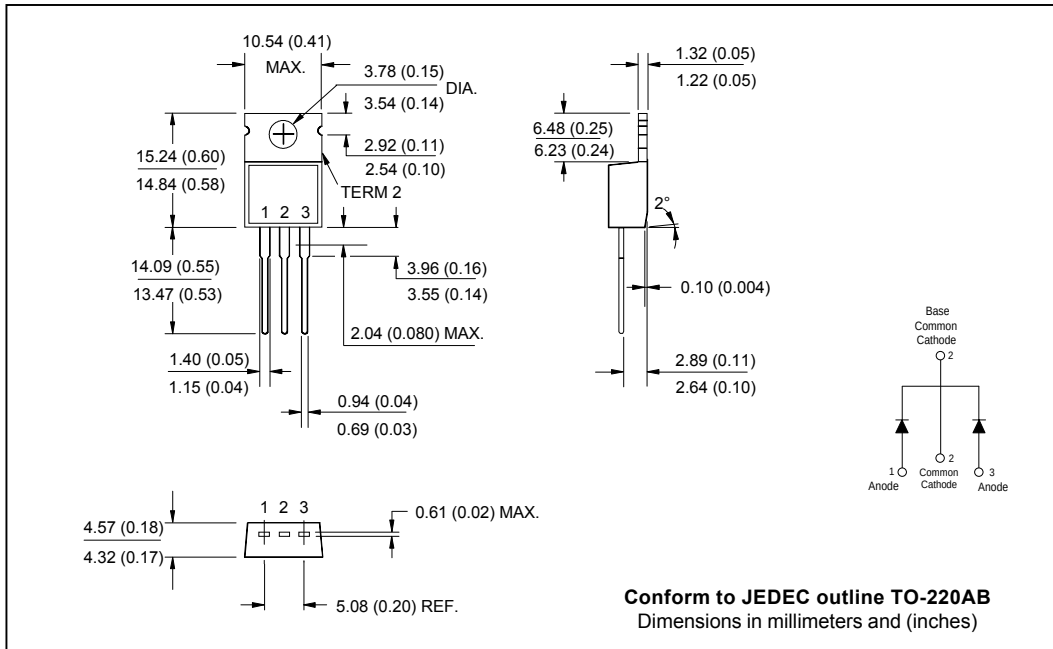


Outline Table

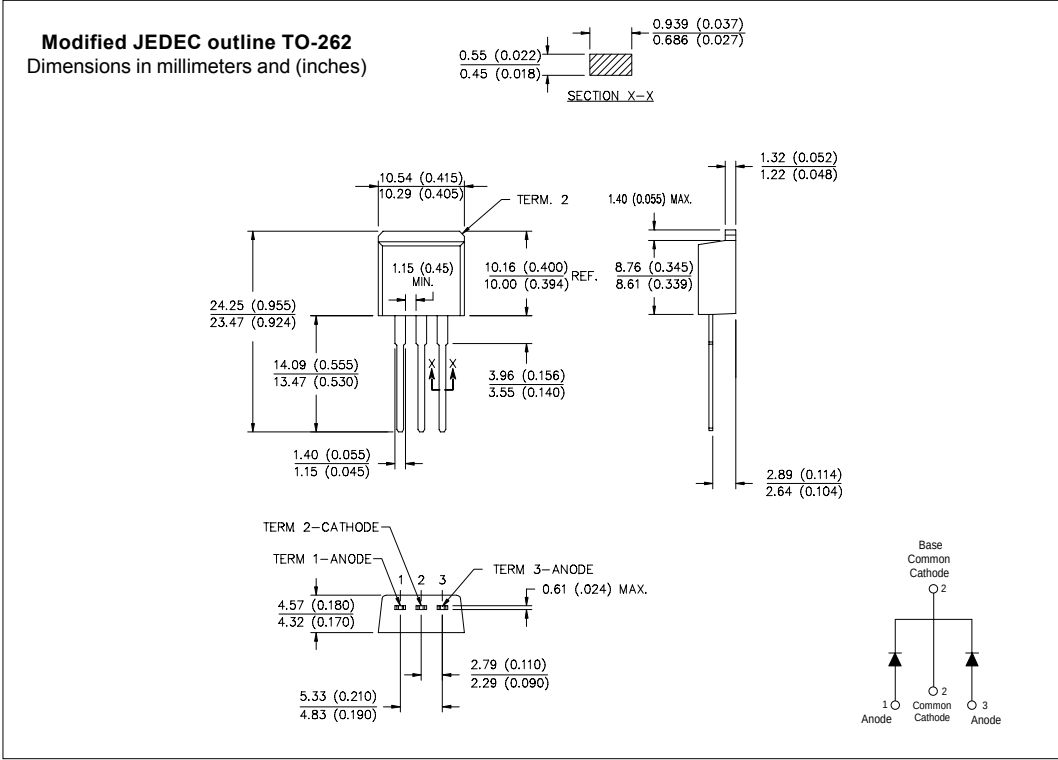

Marking Information

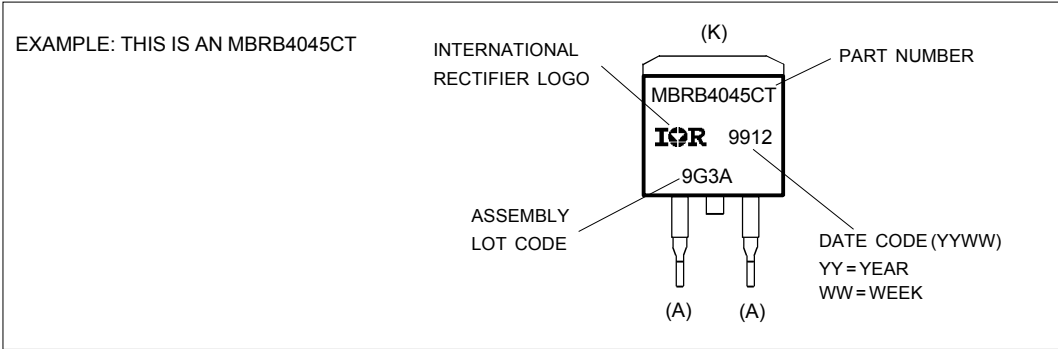

Tape & Reel Information

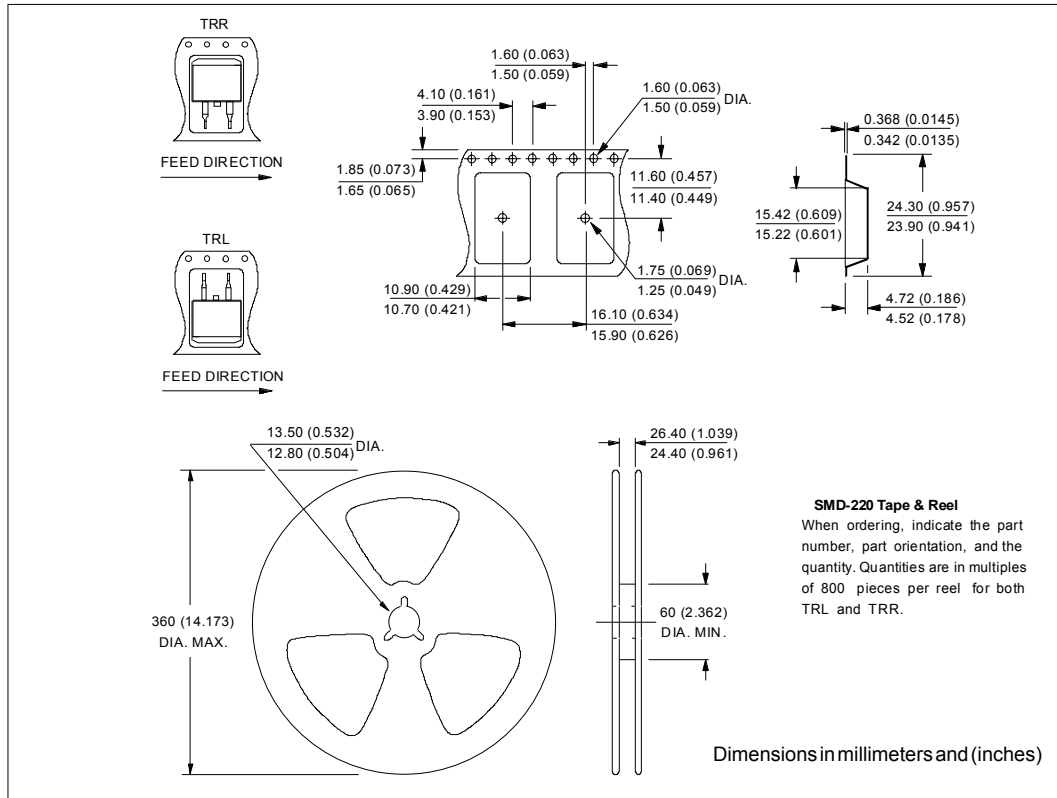

Ordering Information Table

Device Code					
1	2	3	4	5	6
MBR	B	40	45	CT	-1
1	Essential Part Number				
2	Package Style: none = TO-220 B = D ² Pak				
3	Current Rating: 40 = 40A				
4	Voltage code: Code = V _{RRM}				
5	Circuit configuration (Center Tap - Dual)				
6	-1 = TO-262 option				

```

MBR4045CT
*****
*      This model has been developed by      *
*      Wizard SPICE MODEL GENERATOR (1999)  *
*      (International Rectifier Corporation)  *
*      Contains proprietary Information      *
*****
* SPICE Model Diode is composed by a        *
* simple diode plus paralalled VCG2T        *
*****
.SUBCKT MBR4045CT ANO CAT
D1 ANO 1 DMOD (0.07089)
*Define diode model
.MODEL DMOD D(IS=1.41031849705903E-04A,N=1.12223892649545,BV=49V,
+ IBV=0.267178064395486A,RS= 0.000581298,CJO=2.94926944579954E-08,
+ VJ=0.779269989906853,XTI=2, EG=0.730300626417364)
*****
*Implementation of VCG2T
VX 1 2 DC 0V
R1 2 CAT TRES 1E-6
.MODEL TRES RES(R=1,TC1=19.7716341798827)
GP1 ANO CAT VALUE={-ABS(I(VX))*(EXP(((((-2.531689E-03/19.77164)*((V(2,CAT)*1E6)/
(I(VX)+1E-6)-1)))+1)*6.454822E-02*ABS(V(ANO,CAT)))-1)}
*****
.ENDS MBR4045CT

Thermal Model Subcircuit
.SUBCKT MBR4045CT 5 1

CTHERM1      5      4      1.84E+00
CTHERM2      4      3      1.74E+01
CTHERM3      3      2      9.36E+01
CTHERM4      2      1      1.30E+03

R THERM1      5      4      4.55E-01
R THERM2      4      3      5.76E-01
R THERM1      3      2      3.12E-01
R THERM1      2      1      1.49E-01

.ENDS MBR4045CT

```

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 09/01