



EXPANDABLE 3-WIDE 3-INPUT  
"AND-OR-INVERT" GATE

MTTL I MC500/400 series

MC504 • MC554  
MC404 • MC454

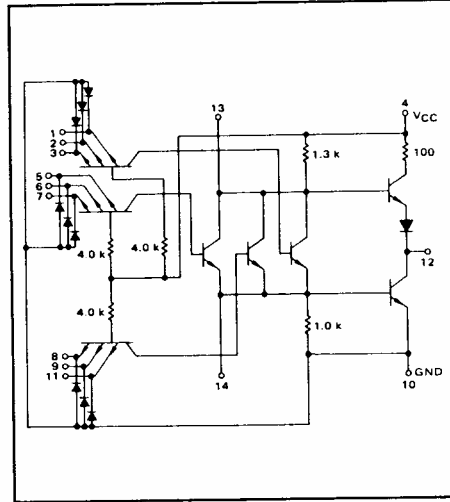

This device consists of three 3-input AND gates ORed together driving an output inverter. The common ORing nodes are available for expansion, and up to 10 AND gates can be ORed together using the MC509 or the MC510 series expanders. Care should be taken to minimize the amount of capacitance on the expander terminals in order to maintain switching speeds.



Positive Logic:

$$12 = (1 + 2 + 3) + (5 + 6 + 7) + (8 + 9 + 11) + (\text{Expanders})$$

Negative Logic:


$$12 = (1 + 2 + 3) + (5 + 6 + 7) + (8 + 9 + 11) + (\text{Expanders})$$

Total Power Dissipation - 25 mW typ/pkg  
Propagation Delay Time - 12 ns typ

| TYPE NO.       | INPUT LOADING FACTOR (If) | OUTPUT DRIVE (IOL)                                            | TEMPERATURE RANGE |
|----------------|---------------------------|---------------------------------------------------------------|-------------------|
| MC504<br>MC554 | 1 (-1.33 mA)              | 15 MC500 series Gates (20 mA)<br>7 MC500 series Gates (10 mA) | -55°C to +125°C   |
| MC404<br>MC454 | 1 (-1.66 mA)              | 12 MC400 series Gates (20 mA)<br>6 MC400 series Gates (10 mA) | 0°C to +75°C      |


SWITCHING TIME TEST CIRCUIT

VOLTAGE WAVEFORMS AND DEFINITIONS

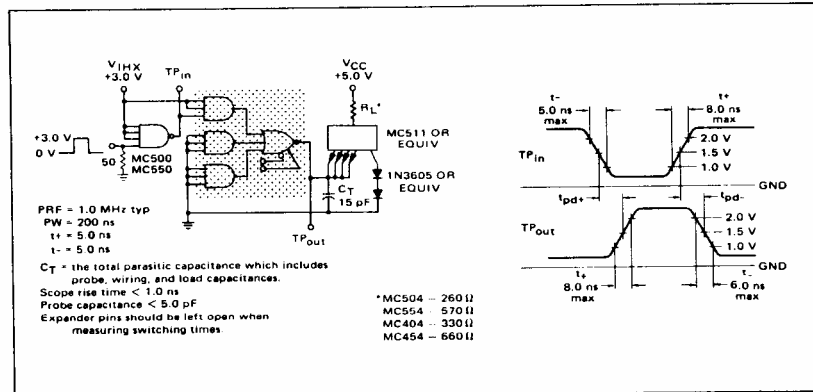

## ELECTRICAL CHARACTERISTICS

Test procedures are shown for only one input of the device. To complete testing sequence through remaining inputs in the same manner.



| TEST CONDITIONS       |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
|-----------------------|-----------|-----|--------------------------|-----|-------|--------------------------|-----|-------|-----------------------------------------------------|----------|----------|----------|----------|----------|----------|---|---|
| mA                    |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Volts                 |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Characteristic        | Symbol    | Pin | MC504, MC554 Test Limits |     |       | MC404, MC454 Test Limits |     |       | TEST CURRENT / VOLTAGE APPLIED TO PINS LISTED BELOW |          |          |          |          |          |          |   |   |
|                       |           |     | Min                      | Max | Typ   | Min                      | Max | Typ   | $I_{CC}$                                            | $V_{IN}$ | $V_{OL}$ | $V_{OH}$ | $V_{IN}$ | $V_{OL}$ | $V_{OH}$ |   |   |
| Input                 |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Forward Current       | $I_F$     | 1   | -1.35                    | -   | -1.35 | -1.66                    | -   | -1.66 | -                                                   | -        | -        | -        | -        | -        | -        | - | - |
| Leakage Current       | $I_L$     | 1   | 100                      | -   | 100   | 100                      | -   | 100   | -                                                   | -        | -        | -        | -        | -        | -        | - | - |
| Inverse Beta Current  | $I_L$     | 1   | 100                      | -   | 100   | 100                      | -   | 100   | -                                                   | -        | -        | -        | -        | -        | -        | - | - |
| Breakdown Voltage     | $BV_{IN}$ | 1   | 5.5                      | -   | 5.5   | 5.5                      | -   | 5.5   | -                                                   | -        | -        | -        | -        | -        | -        | - | - |
| Output                |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Output Voltage        | $V_{OUT}$ | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Leakage Current       | $I_L$     | 12  | 2.5                      | -   | 2.5   | 2.5                      | -   | 2.5   | -                                                   | 2.5      | -        | -        | -        | -        | -        | - | - |
| Short-Circuit Current | $I_{SC}$  | 12  | 10                       | -   | 10    | 10                       | -   | 10    | -                                                   | 10       | -        | -        | -        | -        | -        | - | - |
| Switching Times       |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Propagation Delay     | $t_{PD}$  | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Power Supply          | $V_{OH}$  | 12  | 2.5                      | -   | 2.5   | 2.5                      | -   | 2.5   | -                                                   | 2.5      | -        | -        | -        | -        | -        | - | - |
| Power Requirements    |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Total Device Power    | $P_{TOT}$ | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Supply Current        | $I_{CC}$  | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Switching Parameters  |           |     |                          |     |       |                          |     |       |                                                     |          |          |          |          |          |          |   |   |
| Turn-On Delay         | $t_{ON}$  | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Turn-Off Delay        | $t_{OFF}$ | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Rise Time             | $t_R$     | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |
| Fall Time             | $t_F$     | 12  | 0.45                     | -   | 0.45  | 0.45                     | -   | 0.45  | -                                                   | 0.45     | -        | -        | -        | -        | -        | - | - |

\* Prime Fan-Out