

MC68HC05RC17

General Release Specification

January 16, 1997

CSIC MCU Design Center
Austin, Texas

General Release Specification — MC68HC05RC17

List of Sections

Section 1. General Description	15
Section 2. Memory	27
Section 3. Central Processor Unit (CPU)	33
Section 4. Interrupts	39
Section 5. Resets	47
Section 6. Low-Power Modes	55
Section 7. Parallel Input/Output (I/O)	59
Section 8. Core Timer	63
Section 9. Carrier Modulator Transmitter (CMT)	69
Section 10. Phase-Locked Loop (PLL) Synthesizer	87
Section 11. Instruction Set	93
Section 12. Electrical Specifications	111
Section 13. Mechanical Specifications	121
Section 14. Ordering Information	123

List of Sections

General Release Specification — MC68HC05RC17

Table of Contents

Section 1. General Description

1.1	Contents	15
1.2	Introduction	15
1.3	Features	16
1.4	Mask Options	18
1.5	Signal Description	20
1.5.1	V_{DD} and V_{SS}	20
1.5.2	\overline{IRQ} (Maskable Interrupt Request)	22
1.5.3	OSC1 and OSC2	22
1.5.4	\overline{RESET}	23
1.5.5	\overline{LPRST}	23
1.5.6	IRO	24
1.5.7	Port A (PA0–PA7)	24
1.5.8	Port B (PB0–PB7)	24
1.5.9	Port C (PC0–PC1 and PC4–PC7)	24
1.5.10	XFC	25
1.5.11	V_{DDSYN}	25

Section 2. Memory

2.1	Contents	27
2.2	Introduction	27
2.3	Memory Map	27
2.3.1	ROM	30
2.3.2	ROM Security	30
2.3.3	RAM	31

Section 3. Central Processor Unit (CPU)

3.1	Contents	33
3.2	Introduction	33
3.3	CPU Registers	34
3.4	Accumulator	35
3.5	Index Register	35
3.6	Condition Code Register	35
3.7	Stack Pointer	36
3.8	Program Counter	37

Section 4. Interrupts

4.1	Contents	39
4.2	Introduction	39
4.3	CPU Interrupt Processing	40
4.4	Reset Interrupt Sequence	41
4.5	Software Interrupt (SWI)	41
4.6	Hardware Interrupts	43
4.7	External Interrupt ($\overline{\text{IRQ}}$ /Port B Keyscan)	43
4.8	External Interrupt Timing	44
4.9	Carrier Modulator Transmitter Interrupt (CMT)	44
4.10	Core Timer Interrupt	45

Section 5. Resets

5.1	Contents	47
5.2	Introduction	47
5.3	External Reset ($\overline{\text{RESET}}$)	48
5.4	Low-Power External Reset ($\overline{\text{LPRST}}$)	50

5.5	Internal Resets	50
5.5.1	Power-On Reset (POR).	50
5.5.2	Computer Operating Properly Reset (COPR).	51
5.5.2.1	Resetting the COP	51
5.5.2.2	COP During Wait Mode	51
5.5.2.3	COP During Stop Mode	51
5.5.2.4	COP Watchdog Timer Considerations	52
5.5.2.5	COP Register	53
5.5.3	Illegal Address	53

Section 6. Low-Power Modes

6.1	Contents	55
6.2	Introduction	55
6.3	Stop Mode	55
6.4	Wait Mode	56
6.5	Low-Power Reset	58

Section 7. Parallel Input/Output (I/O)

7.1	Contents	59
7.2	Introduction	59
7.3	Port A	60
7.4	Port B	60
7.5	Port C	61
7.6	Input/Output (I/O) Programming	61

Section 8. Core Timer

8.1	Contents	63
8.2	Introduction	63
8.3	Core Timer Control and Status Register	65
8.4	Core Timer Counter Register	67
8.5	Computer Operating Properly (COP) Reset	67
8.6	Timer During Wait Mode	68

Section 9. Carrier Modulator Transmitter (CMT)

9.1	Contents	69
9.2	Introduction	69
9.3	Overview	70
9.4	Carrier Generator	72
9.4.1	Time Counter	73
9.4.2	Carrier Generator Data Registers	74
9.5	Modulator	76
9.5.1	Time Mode	77
9.5.2	FSK Mode	79
9.5.3	Extended Space Operation	80
9.5.3.1	End-of-Cycle (EOC) Interrupt	81
9.5.3.2	Modulator Control and Status Register	82
9.5.4	Modulator Period Data Registers	85

Section 10. Phase-Locked Loop (PLL) Synthesizer

10.1	Contents	87
10.2	Introduction	87
10.3	Phase-Locked Loop Control Register	89
10.4	Operation During Stop Mode	91
10.5	Noise Immunity	91

Section 11. Instruction Set

11.1	Contents	93
11.2	Introduction	94
11.3	Addressing Modes	94
11.3.1	Inherent	95
11.3.2	Immediate	95
11.3.3	Direct	95
11.3.4	Extended	95
11.3.5	Indexed, No Offset	96
11.3.6	Indexed, 8-Bit Offset	96
11.3.7	Indexed, 16-Bit Offset	96
11.3.8	Relative	97

11.4	Instruction Types	97
11.4.1	Register/Memory Instructions	98
11.4.2	Read-Modify-Write Instructions	99
11.4.3	Jump/Branch Instructions	100
11.4.4	Bit Manipulation Instructions	102
11.4.5	Control Instructions	103
11.5	Instruction Set Summary	104

Section 12. Electrical Specifications

12.1	Contents	111
12.2	Introduction	111
12.3	Maximum Ratings	112
12.4	Operating Range	113
12.5	Thermal Characteristics	113
12.6	DC Electrical Characteristics (5.0 Vdc)	114
12.7	DC Electrical Characteristics (3.3 Vdc)	115
12.8	DC Electrical Characteristics (2.2 Vdc)	116
12.9	Control Timing (3.3 Vdc and 5.0 Vdc)	117
12.10	Control Timing (2.2 Vdc)	118

Section 13. Mechanical Specifications

13.1	Contents	121
13.2	Introduction	121
13.3	28-Pin Plastic Dual In-Line Package (Case 710-02)	121
13.4	28-Pin Small Outline Integrated Circuit Package (Case 751F-04)	122

Section 14. Ordering Information

14.1	Contents	123
14.2	Introduction	123
14.3	MCU Ordering Forms	123
14.4	Application Program Media	124
14.5	ROM Program Verification	125
14.6	ROM Verification Units (RVUs)	126
14.7	MC Order Numbers	126

General Release Specification — MC68HC05RC17

List of Figures

Figure	Title	Page
1-1	MC68HC05RC17 Block Diagram	17
1-2	28-Pin SOIC Pinout	21
1-3	28-Pin PDIP Pinout	21
1-4	Oscillator Connections	23
2-1	MC68HC05RC17 Memory Map	28
2-2	I/O Registers	29
3-1	Programming Model	34
3-2	Stacking Order	34
4-1	Interrupt Processing Flowchart	42
4-2	IRQ Function Block Diagram	43
5-1	Reset Block Diagram	48
5-2	Reset and POR Timing Diagram	49
5-3	COP Watchdog Timer Location	53
6-1	Stop Recovery Timing Diagram	56
6-2	Stop/Wait Flowchart	57
7-1	Port B Pullup Option	60
7-2	I/O Circuitry	62
8-1	Core Timer Block Diagram	64
8-2	Core Timer Control and Status Register (CTCSR)	65
8-3	Core Timer Counter Register (CTCR)	67

List of Figures

Figure	Title	Page
9-1	Carrier Modulator Transmitter Module Block Diagram	71
9-2	Carrier Generator Block Diagram	72
9-3	Carrier Data Register (CHR1, CLR1, CHR2, and CLR2)	74
9-4	Modulator Block Diagram	77
9-5	CMT Operation in Time Mode	78
9-6	Extended Space Operation	80
9-7	Modulator Control and Status Register (MCSR)	82
9-8	Modulator Data Registers (MDR1, MDR2, and MDR3)	85
10-1	PLL Circuit	88
10-2	Phase-Locked Loop Control Register (PLLCR)	89
12-1	5.5-Volt Maximum Supply Current vs Internal Clock Frequency	119
12-2	3.6-Volt Maximum Supply Current vs Internal Clock Frequency	119
12-3	2.4-Volt Maximum Supply Current vs Internal Clock Frequency	120
12-4	Maximum Wait Mode Supply Current vs V_{DD} with PLL Disengaged	120

General Release Specification — MC68HC05RC17

List of Tables

Table	Title	Page
4-1	Vector Address for Interrupts and Reset	40
5-1	COP Watchdog Timer Recommendations	52
7-1	I/O Pin Functions	62
8-1	RTI and COP Rates at 4.096-MHz Oscillator	66
10-1	PS1 and PS0 Speed Selects with 32.768-kHz Crystal	90
11-1	Register/Memory Instructions	98
11-2	Read-Modify-Write Instructions	99
11-3	Jump and Branch Instructions	101
11-4	Bit Manipulation Instructions	102
11-5	Control Instructions	103
11-6	Instruction Set Summary	104
11-7	Opcode Map	110
14-1	MC Order Numbers	126

List of Tables

General Release Specification — MC68HC05RC17

Section 1. General Description

1.1 Contents

1.2	Introduction	15
1.3	Features	16
1.4	Mask Options	18
1.5	Signal Description	20
1.5.1	V_{DD} and V_{SS}	20
1.5.2	\overline{IRQ} (Maskable Interrupt Request)	22
1.5.3	$\overline{OSC1}$ and $\overline{OSC2}$	22
1.5.4	\overline{RESET}	23
1.5.5	\overline{LPRST}	23
1.5.6	\overline{IRO}	24
1.5.7	Port A (PA0–PA7)	24
1.5.8	Port B (PB0–PB7)	24
1.5.9	Port C (PC0–PC1 and PC4–PC7)	24
1.5.10	XFC	25
1.5.11	V_{DDSYN}	25

1.2 Introduction

The MC68HC05RC17 is a general-purpose, low-cost addition to the M68HC05 Family of microcontroller units (MCUs) and is suitable for remote control applications. It contains the HC05 central processing unit (CPU) core, including the 14-stage core timer with real-time interrupt (RTI) and computer operating properly (COP) watchdog systems. On-chip peripherals include a carrier modulator transmitter. The 16-Kbyte memory map has 15,936 bytes of user ROM and 352 bytes of RAM. There are 18 input-output (I/O) lines (eight having keyscan logic and pullups) and a low-power reset pin.

General Description


The MC68HC05RC17 is available in 28-pin small outline integrated circuit (SOIC) or plastic dual in-line package (PDIP) packages. Four additional I/O lines are available for bond out in higher pin count packages.

NOTE: Consult the factory for availability of 28-pin dual in-line and higher pin count packages.

1.3 Features

Features of the MC68HC05RC17 include:

- Low Cost
- HC05 Core
- 28-Pin SOIC or DIP Packages
- On-Chip Oscillator with 32.768-kHz Crystal/Ceramic Resonator
- Phase-Locked Loop (PLL) Synthesizer with Programmable Speed
- 15,936 Bytes of User ROM
- 64 Bytes of Burn-In ROM
- 352 Bytes of On-Chip RAM
- 14-Stage Core Timer with Real-Time Interrupt (RTI) and Computer Operating Properly (COP) Watchdog Circuits
- Carrier Modulator Transmitter Supporting Baseband, Pulse Length Modulator (PLM), and Frequency Shift Keying (FSK) Protocols
- Low-Power Reset Pin
- 18 Bidirectional I/O Lines (Four Additional I/O Lines Available for Bond Out in Higher Pin Count Packages)
- Mask Programmable Pullups and Interrupt on Eight Port Pins (PB0–PB7)
- High-Current Infrared (IR) Drive Pin
- High-Current Port Pin (PC0)

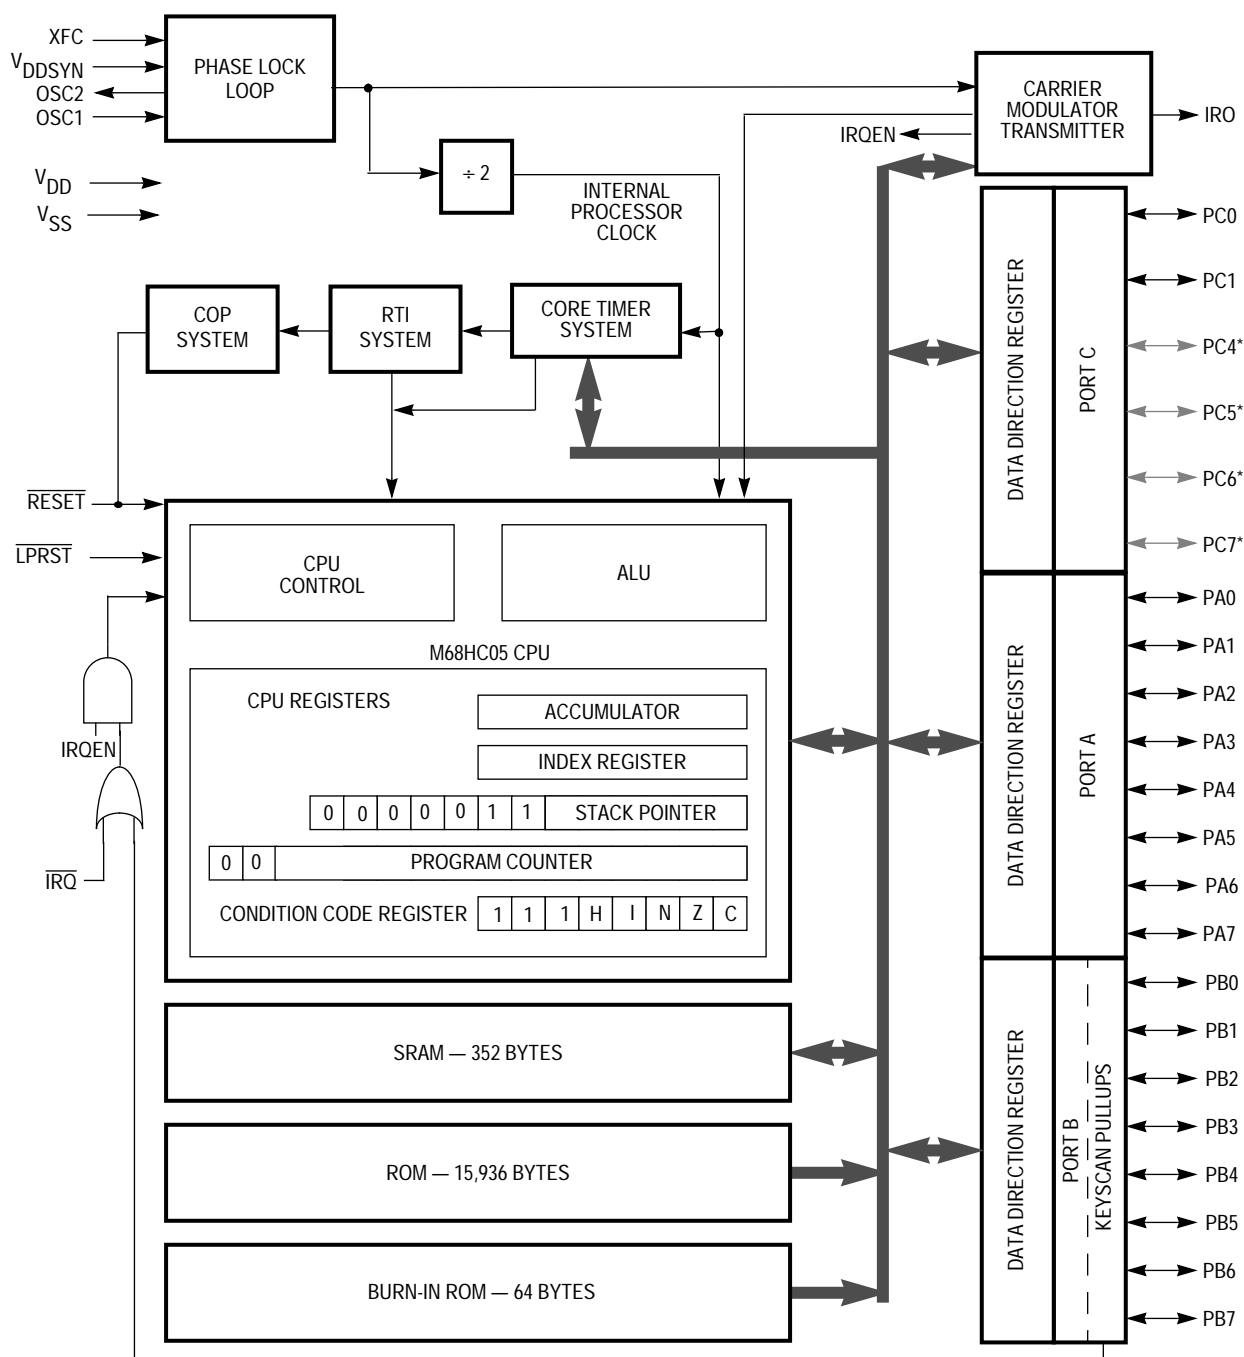

* Marked pins are available only in higher pin count (>28) packages.

Figure 1-1. MC68HC05RC17 Block Diagram

General Description

- Power-Saving Stop and Wait Modes
- Mask Selectable Options:
 - COP Watchdog Timer
 - STOP Instruction Disable
 - Edge-Sensitive or Edge- and Level-Sensitive Interrupt Trigger
 - Port B Pullups for Keyscan
- Illegal Address Reset
- ROM Security

NOTE: *A line over a signal name indicates an active-low signal. For example, \overline{RESET} is active low.*

1.4 Mask Options

There are 11 total mask options on the MC68HC05RC17 including:

- Eight Port B Pullups
- IRQ Sensitivity
- COP Enable/Disable
- STOP Enable/Disable

These are nonprogrammable options in that they are selected at the time of code submission (when masks are made). These options are:

PB7PU — Port B7 Pullup/Interrupt

This bit enables or disables the pullup/interrupt on port B, bit 7.

1 = Enables the pullup/interrupt

0 = Disables the pullup/interrupt

PB6PU — Port B6 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 6.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

PB5PU — Port B5 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 5.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

PB4PU — Port B4 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 4.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

PB3PU — Port B3 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 3.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

PB2PU — Port B2 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 2.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

PB1PU — Port B1 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 1.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

PB0PU — Port B0 Pullup/Interrupt

This option enables or disables the pullup/interrupt on port B, bit 0.

1 = Enables pullup/interrupt

0 = Disables pullup/interrupt

COPEN — COP Enable

When the COP option is selected (COPEN = 1), the COP watchdog timer is enabled.

When the COP option is deselected (COPEN = 0), the COP watchdog timer is disabled.

General Description

STOPEN — STOP Instruction Enable

When the STOP option is selected (STOPEN = 1), the STOP instruction is enabled.

When the STOP option is deselected (STOPEN = 0), the STOP instruction is equivalent to a WAIT instruction.

IRQ — IRQ sensitivity

When the IRQ option is selected (IRQ = 1), edge- and level-sensitive IRQ is enabled.

When the IRQ option is deselected (IRQ = 0), edge-only sensitive IRQ is enabled.

NOTE: *The port B keyscan interrupt sensitivity will match that of the IRQ sensitivity. (See [4.7 External Interrupt \(IRQ/Port B Keyscan\)](#) for more information.)*

1.5 Signal Description

Pinout for the 28-pin small outline integrated circuit (SOIC) package is shown in [Figure 1-2](#). Pinout for the 28-pin plastic dual in-line (PDIP) package is shown in [Figure 1-3](#). The signals are described in the following subsections.

NOTE: *Consult the factory for availability of 28-pin dual in-line and higher pin count packages.*

1.5.1 V_{DD} and V_{SS}

Power is supplied to the microcontroller's digital circuits using these two pins. V_{DD} is the positive supply and V_{SS} is ground.

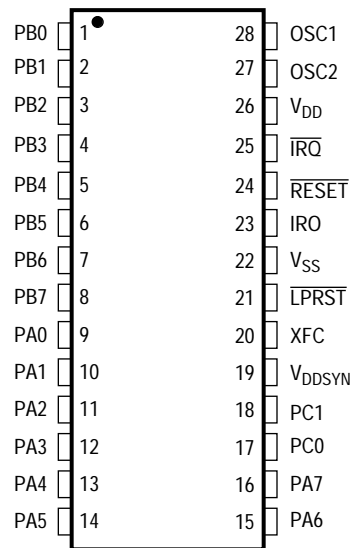


Figure 1-2. 28-Pin SOIC Pinout

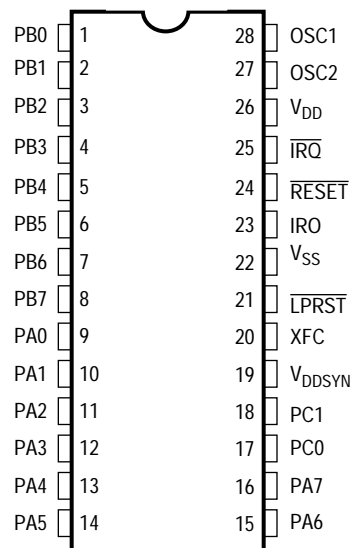


Figure 1-3. 28-Pin PDIP Pinout

General Description

1.5.2 $\overline{\text{IRQ}}$ (Maskable Interrupt Request)

This pin has a mask option as specified by the user that provides one of two different choices of interrupt triggering sensitivity. The options are:

1. Negative edge-sensitive triggering only
2. Both negative edge-sensitive and level-sensitive triggering

The MCU completes the current instruction before it responds to the interrupt request. When $\overline{\text{IRQ}}$ goes low for at least one t_{LIH} , a logic 1 is latched internally to signify that an interrupt has been requested. When the MCU completes its current instruction, the interrupt latch is tested. If the interrupt latch contains a logic 1 and the interrupt mask bit (I bit) in the condition code register is clear, the MCU then begins the interrupt sequence.

If the option is selected to include level-sensitive triggering, the $\overline{\text{IRQ}}$ input requires an external resistor to V_{DD} for wired-OR operation.

The $\overline{\text{IRQ}}$ pin contains an internal Schmitt trigger as part of its input to improve noise immunity.

Refer to [Section 4. Interrupts](#) for more detail.

1.5.3 OSC1 and OSC2

These pins provide control input for an on-chip clock oscillator circuit. A crystal, a ceramic resonator, or an external signal connects to these pins to provide a system clock. The oscillator frequency is two times the internal bus rate.

[Figure 1-4](#) shows the recommended circuit when using a crystal. The crystal and components should be mounted as close as possible to the input pins to minimize output distortion and startup stabilization time.

A ceramic resonator may be used in place of the crystal in cost-sensitive applications. [Figure 1-4 \(a\)](#) shows the recommended circuit for using a ceramic resonator. The manufacturer of the particular ceramic resonator being considered should be consulted for specific information.

An external clock should be applied to the OSC1 input with the OSC2 pin not connected (see [Figure 1-4 \(b\)](#)). This setup can be used if the user does not want to run the CPU with a crystal.

NOTE: The PLL design requires a 32.768-kHz external frequency for proper operation.

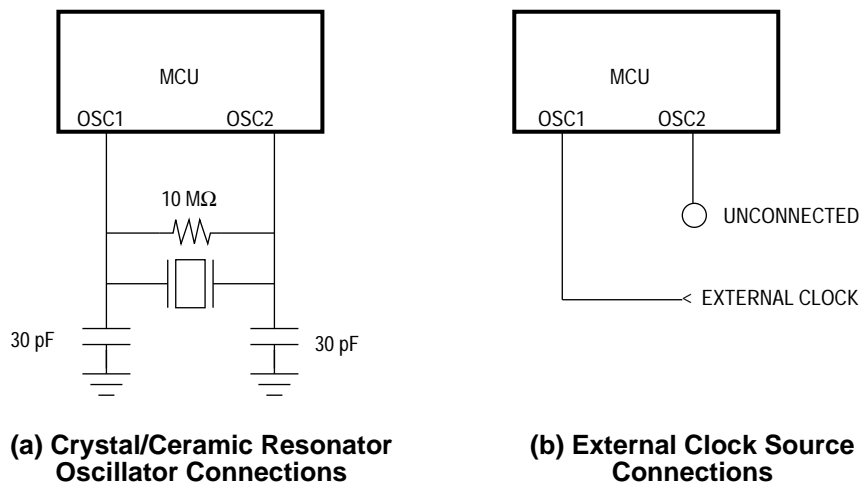


Figure 1-4. Oscillator Connections

1.5.4 $\overline{\text{RESET}}$

This active-low pin is used to reset the MCU to a known startup state by pulling $\overline{\text{RESET}}$ low. The $\overline{\text{RESET}}$ pin contains an internal Schmitt trigger as part of its input to improve noise immunity. See [Section 5. Resets](#).

1.5.5 $\overline{\text{LPRST}}$

The $\overline{\text{LPRST}}$ pin is an active-low pin and is used to put the MCU into low-power reset mode. In low-power reset mode the MCU is held in reset with all processor clocks halted. See [Section 5. Resets](#).

General Description

1.5.6 IRO

The IRO pin is the high-current source and sink output of the carrier modulator transmitter subsystem which is suitable for driving infrared (IR) LED biasing logic. See [Section 9. Carrier Modulator Transmitter \(CMT\)](#).

1.5.7 Port A (PA0–PA7)

These eight I/O lines comprise port A. The state of any pin is software programmable and all port A lines are configured as inputs during power-on or reset. For detailed information on I/O programming, see [Section 7. Parallel Input/Output \(I/O\)](#).

1.5.8 Port B (PB0–PB7)

These eight I/O lines comprise port B. The state of any pin is software programmable and all port B lines are configured as inputs during power-on or reset. Each port B I/O line has a mask optionable pullup for keyscan. For detailed information on I/O programming, see [Section 7. Parallel Input/Output \(I/O\)](#).

1.5.9 Port C (PC0–PC1 and PC4–PC7)

These six I/O lines comprise port C. PC0 is a high-current pin. PC4 through PC7 are available only in higher pin count (>28) packages. The state of any pin is software programmable and all port C lines are configured as input during power-on or reset. For detailed information on I/O programming, see [Section 7. Parallel Input/Output \(I/O\)](#).

NOTE: Only two bits of port C are bonded out in 28-pin packages for the MC68HC05RC17, although port C is truly a 6-bit port. Since pins PC4–PC7 are unbonded, software should include the code to set their respective data direction register locations to outputs to avoid floating inputs.

1.5.10 XFC

This pin provides a means for connecting an external filter capacitor to the synthesizer phase-locked loop filter. (For additional information concerning this capacitor, refer to [Section 10. Phase-Locked Loop \(PLL\) Synthesizer](#).)

1.5.11 V_{DDSYN}

This pin provides a separate power connection to the PLL synthesizer which should be at the same potential as V_{DD} .

NOTE: Any unused inputs, I/O ports, and no connects should be tied to an appropriate logic level (either V_{DD} or V_{SS}). Although the I/O ports of the MC68HC05RC17 do not require termination, termination is recommended to reduce the possibility of static damage.

General Description

Freescale Semiconductor, Inc.

General Release Specification — MC68HC05RC17

Section 2. Memory

2.1 Contents

2.2 Introduction27

2.3 Memory Map27

2.3.1 ROM30

2.3.2 ROM Security30

2.3.3 RAM31

2.2 Introduction

This section describes the organization of the on-chip memory.

2.3 Memory Map

The MC68HC05RC17 has a 16-Kbyte memory map consisting of user ROM, RAM, burn-in ROM, control registers, and input/output (I/O).

Figure 2-1 is a memory map for the MC68HC05RC17. **Figure 2-2** is a more detailed memory map of the I/O register section.

Memory


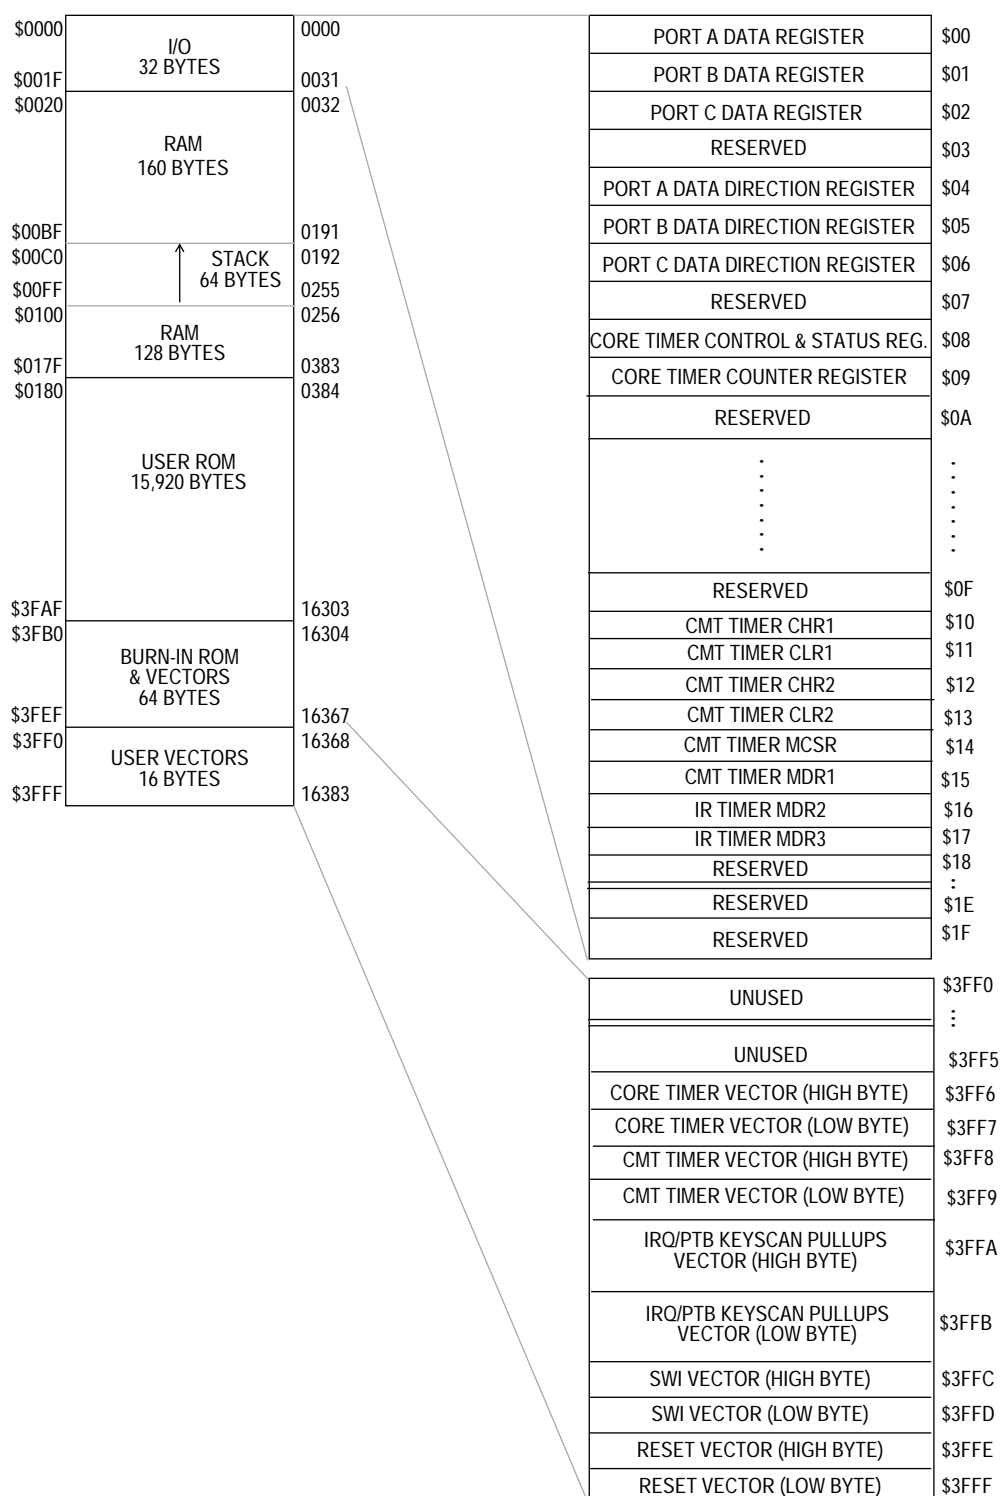


Figure 2-1. MC68HC05RC17 Memory Map

Addr	Register Name	Bit 7	6	5	4	3	2	1	Bit 0
\$00	Port A Data Register	PA7	PA6	PA5	PA4	PA3	PA2	PA1	PA0
\$01	Port B Data Register	PB7	PB6	PB5	PB4	PB3	PB2	PB1	PB0
\$02	Port C Data Register	PC7	PC6	PC5	PC4			PC1	PC0
\$03	Reserved	R	R	R	R	R	R	R	R
\$04	Port A Data Direction Register	DDRA7	DDRA6	DDRA5	DDRA4	DDRA3	DDRA2	DDRA1	DDRA0
\$05	Port B Data Direction Register	DDRB7	DDRB6	DDRB5	DDRB4	DDRB3	DDRB2	DDRB1	DDRB0
\$06	Port C Data Direction Register	DDRC7	DDRC6	DDRC5	DDRC4			DDRC1	DDRC0
\$07	PLL Control Register	0	BCS	0	BWC	PLLON	VCOTST	PS1	PS0
\$08	Timer Control and Status Register	CTOF	RTIF	TOFE	RTIE	TOFC	RTFC	RT1	RT0
\$09	Timer Counter Register	D7	D6	D5	D4	D3	D2	D1	D0
\$0A	Reserved	R	R	R	R	R	R	R	R
\$0B	Reserved	R	R	R	R	R	R	R	R
\$0C	Reserved	R	R	R	R	R	R	R	R
\$0D	Reserved	R	R	R	R	R	R	R	R
\$0E	Reserved	R	R	R	R	R	R	R	R
\$0F	Reserved	R	R	R	R	R	R	R	R
\$10	CMT Timer CHR1	IROLN	CMTPOL	PH5	PH4	PH3	PH2	PH1	PH0
\$11	CMT Timer CLR1	IROLP	0	PL5	PL4	PL3	PL2	PL1	PL0
\$12	CMT Timer CHR2	0	0	SH5	SH4	SH3	SH2	SH1	SH0
\$13	CMT Timer CLR2	0	0	SL5	SL4	SL3	SL2	SL1	SL0
\$14	CMT Timer MCSR	EOC	DIV2	EIMSK	EXSPC	BASE	MODE	IE	MCGEN
\$15	CMT Timer MDR1	MB11	MB10	MB9	MB8	SB11	SB10	SB9	SB8
\$16	CMT Timer MDR2	MB7	MB6	MB5	MB4	MB3	MB2	MB1	MB0
\$17	CMT Timer MDR3	SB7	SB6	SB5	SB4	SB3	SB2	SB1	SB0



= Unimplemented



= Reserved

Figure 2-2. I/O Registers (Sheet 1 of 2)

Memory

Addr	Register Name	Bit 7	6	5	4	3	2	1	Bit 0
\$18	Reserved	R	R	R	R	R	R	R	R
\$19	Reserved	R	R	R	R	R	R	R	R
\$1A	Reserved	R	R	R	R	R	R	R	R
\$1B	Reserved	R	R	R	R	R	R	R	R
\$1C	Reserved	R	R	R	R	R	R	R	R
\$1D	Reserved	R	R	R	R	R	R	R	R
\$1E	Reserved	R	R	R	R	R	R	R	R
\$1F	Reserved	R	R	R	R	R	R	R	R

R	= Reserved
---	------------

Figure 2-2. I/O Registers (Sheet 2 of 2)

2.3.1 ROM

The user ROM consists of 15,920 bytes of ROM located from \$0180 to \$3FAF and 16 bytes of user vectors located from \$3FF0 to \$3FFF.

The burn-in ROM is located from \$3FB0 to \$3FEF.

Ten of the user vectors, \$3FF6 through \$3FFF, are dedicated to reset and interrupt vectors. The six remaining locations — \$3FF0, \$3FF1, \$3FF2, \$3FF3, \$3FF4, and \$3FF5 — are general-purpose user ROM locations.

2.3.2 ROM Security

Security has been incorporated into the MC68HC05RC17 to prevent external viewing of the ROM contents. This feature helps ensure that customer-developed software remains proprietary.¹

1. No security feature is absolutely secure. However, Motorola's strategy is to make reading or copying the ROM difficult for unauthorized users.

2.3.3 RAM

The user RAM consists of 352 bytes of a shared stack area. The RAM starts at address \$0020 and ends at address \$017F. The stack begins at address \$00FF. The stack pointer can access 64 bytes of RAM in the range \$00FF to \$00C0.

NOTE: *Using the stack area for data storage or temporary work locations requires care to prevent it from being overwritten due to stacking from an interrupt or subroutine call.*

General Release Specification — MC68HC05RC17

Section 3. Central Processor Unit (CPU)

3.1 Contents

3.2 Introduction33

3.3 CPU Registers34

3.4 Accumulator35

3.5 Index Register.....35

3.6 Condition Code Register.....35

3.7 Stack Pointer36

3.8 Program Counter37

3.2 Introduction

This section describes the registers of the MC68HC05RC17’s central processor unit (CPU).

3.3 CPU Registers

The MCU contains five registers as shown in **Figure 3-1**. The interrupt stacking order is shown in **Figure 3-2**.


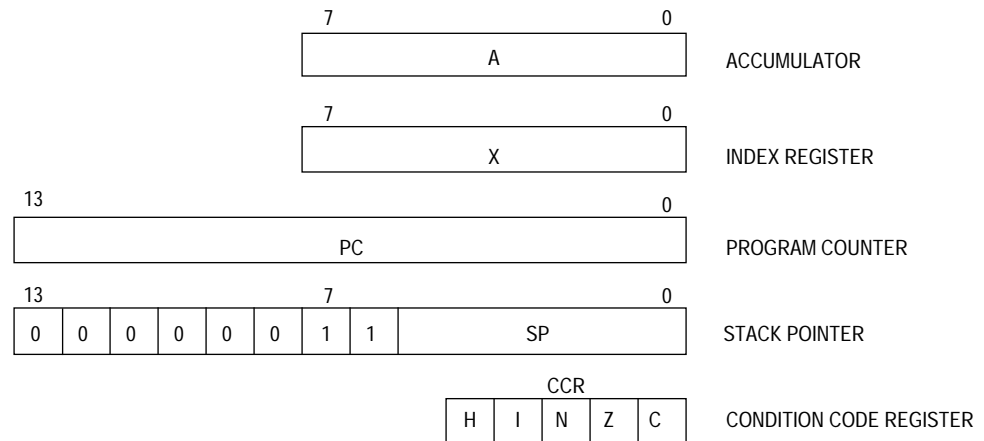


Figure 3-1. Programming Model

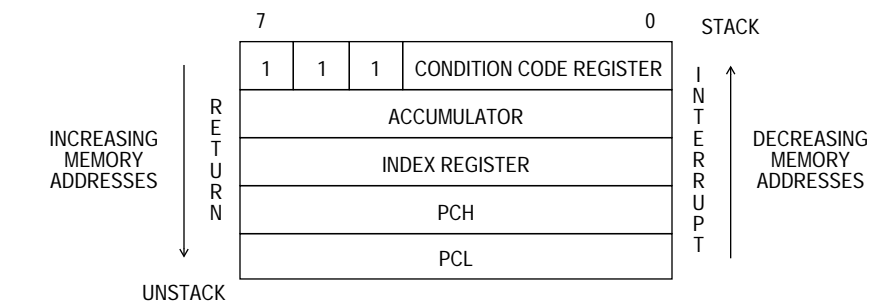


NOTE: Since the stack pointer decrements during pushes, the PCL is stacked first, followed by PCH, etc. Pulling from the stack is in the reverse order.

Figure 3-2. Stacking Order


3.4 Accumulator

The accumulator (A) is a general-purpose 8-bit register used to hold operands and results of arithmetic calculations or data manipulations.




3.5 Index Register

The index register (X) is an 8-bit register used for the indexed addressing value to create an effective address. The index register may also be used as a temporary storage area.



3.6 Condition Code Register

The condition code register (CCR) is a 5-bit register in which the H, N, Z, and C bits are used to indicate the results of the instruction just executed, and the I bit is used to enable or disable interrupts. These bits can be individually tested by a program, and specific actions can be taken as a result of their state. Each bit is explained in the following paragraphs.



Half Carry (H)

This bit is set during ADD and ADC operations to indicate that a carry occurred between bits 3 and 4.

Interrupt (I)

When this bit is set, the timer and external interrupt are masked (disabled). If an interrupt occurs while this bit is set, the interrupt is latched and processed as soon as the I bit is cleared.

Central Processor Unit (CPU)

Negative (N)

When set, this bit indicates that the result of the last arithmetic, logical, or data manipulation was negative.

Zero (Z)

When set, this bit indicates that the result of the last arithmetic, logical, or data manipulation was zero.

Carry/Borrow (C)

When set, this bit indicates that a carry or borrow out of the arithmetic logical unit (ALU) occurred during the last arithmetic operation. This bit is also affected during bit test and branch instructions and during shifts and rotates.

3.7 Stack Pointer


The stack pointer (SP) contains the address of the next free location on the stack. During an MCU reset or the reset stack pointer (RSP) instruction, the stack pointer is set to location \$00FF. The stack pointer is then decremented as data is pushed onto the stack and incremented as data is pulled from the stack.

When accessing memory, the eight most significant bits are permanently set to 00000011. These eight bits are appended to the six least significant register bits to produce an address within the range of \$00FF to \$00C0. Subroutines and interrupts may use up to 64 (decimal) locations. If 64 locations are exceeded, the stack pointer wraps around and loses the previously stored information. A subroutine call occupies two locations on the stack; an interrupt uses five locations.

13				7				0
0	0	0	0	0	0	1	1	SP

3.8 Program Counter

The program counter (PC) is a 13-bit register that contains the address of the next byte to be fetched.



NOTE: *The HC05 CPU core is capable of addressing 16-bit locations. For this implementation, however, the addressing registers are limited to a 16-Kbyte memory map.*

Central Processor Unit (CPU)

Freescale Semiconductor, Inc.

General Release Specification — MC68HC05RC17

Section 4. Interrupts

4.1 Contents

4.2 Introduction39

4.3 CPU Interrupt Processing40

4.4 Reset Interrupt Sequence41

4.5 Software Interrupt (SWI)41

4.6 Hardware Interrupts43

4.7 External Interrupt (IRQ/Port B Keyscan)43

4.8 External Interrupt Timing44

4.9 Carrier Modulator Transmitter Interrupt (CMT)44

4.10 Core Timer Interrupt45

4.2 Introduction

The MCU can be interrupted four different ways:

1. Non-maskable software interrupt instruction (SWI)
2. External asynchronous interrupt ($\overline{\text{IRQ}}$ /port B keyscan)
3. Internal carrier modulator transmitter interrupt
4. Internal core timer interrupt

Interrupts

4.3 CPU Interrupt Processing

Interrupts cause the processor to save register contents on the stack and to set the interrupt mask (I bit) to prevent additional interrupts. Unlike reset, hardware interrupts do not cause the current instruction execution to be halted, but are considered pending until the current instruction is complete.

If interrupts are not masked (I bit in the CCR is clear) and the corresponding interrupt enable bit is set, the processor will proceed with interrupt processing. Otherwise, the next instruction is fetched and executed. If an interrupt occurs, the processor completes the current instruction, stacks the current CPU register state, sets the I bit to inhibit further interrupts, and finally checks the pending hardware interrupts. If more than one interrupt is pending following the stacking operation, the interrupt with the highest vector location shown in [Table 4-1](#) will be serviced first. The SWI is executed the same as any other instruction, regardless of the I-bit state.

When an interrupt is to be processed, the CPU fetches the address of the appropriate interrupt software service routine from the vector table at locations \$3FF6 through \$3FFF as defined in [Table 4-1](#).

Table 4-1. Vector Address for Interrupts and Reset

Register	Flag Name	Interrupt	CPU Interrupt	Vector Address
N/A	N/A	Reset	RESET	\$3FFE–\$3FFF
N/A	N/A	Software Interrupt	SWI	\$3FFC–\$3FFD
N/A	N/A	External Interrupts*	IRQ	\$3FFA–\$3FFB
MCSR	EOC	End-of-Cycle Interrupt	CMT	\$3FF8–\$3FF9
CTCSR	CTOF, RTIF	Real-Time Interrupt Core Timer Overflow	CORE TIMER	\$3FF6–\$3FF7

*External interrupts include $\overline{\text{IRQ}}$ and port B keyscan sources.

The M68HC05 CPU does not support interruptible instructions. The maximum latency to the first instruction of the interrupt service routine must include the longest instruction execution time plus stacking overhead.

$$\text{Latency} = (\text{Longest instruction execution time} + 10) \times t_{\text{cyc}} \text{ seconds}$$

An return from interrupt (RTI) instruction is used to signify when the interrupt software service routine is completed. The RTI instruction causes the register contents to be recovered from the stack and normal processing to resume at the next instruction that was to be executed when the interrupt took place. **Figure 4-1** shows the sequence of events that occurs during interrupt processing.

4.4 Reset Interrupt Sequence

The reset function is not in the strictest sense an interrupt; however, it is acted upon in a similar manner as shown in **Figure 4-1**. A low-level input on the RESET pin or an internally generated RST signal causes the program to vector to its starting address, which is specified by the contents of memory locations \$3FFE and \$3FFF. The I bit in the condition code register is also set. The MCU is configured to a known state during this type of reset.

4.5 Software Interrupt (SWI)

The SWI is an executable instruction and a nonmaskable interrupt since it is executed regardless of the state of the I bit in the CCR. If the I bit is zero (interrupts enabled), the SWI instruction executes after interrupts that were pending before the SWI was fetched or before interrupts generated after the SWI was fetched. The interrupt service routine address is specified by the contents of memory locations \$3FFC and \$3FFD.

Interrupts

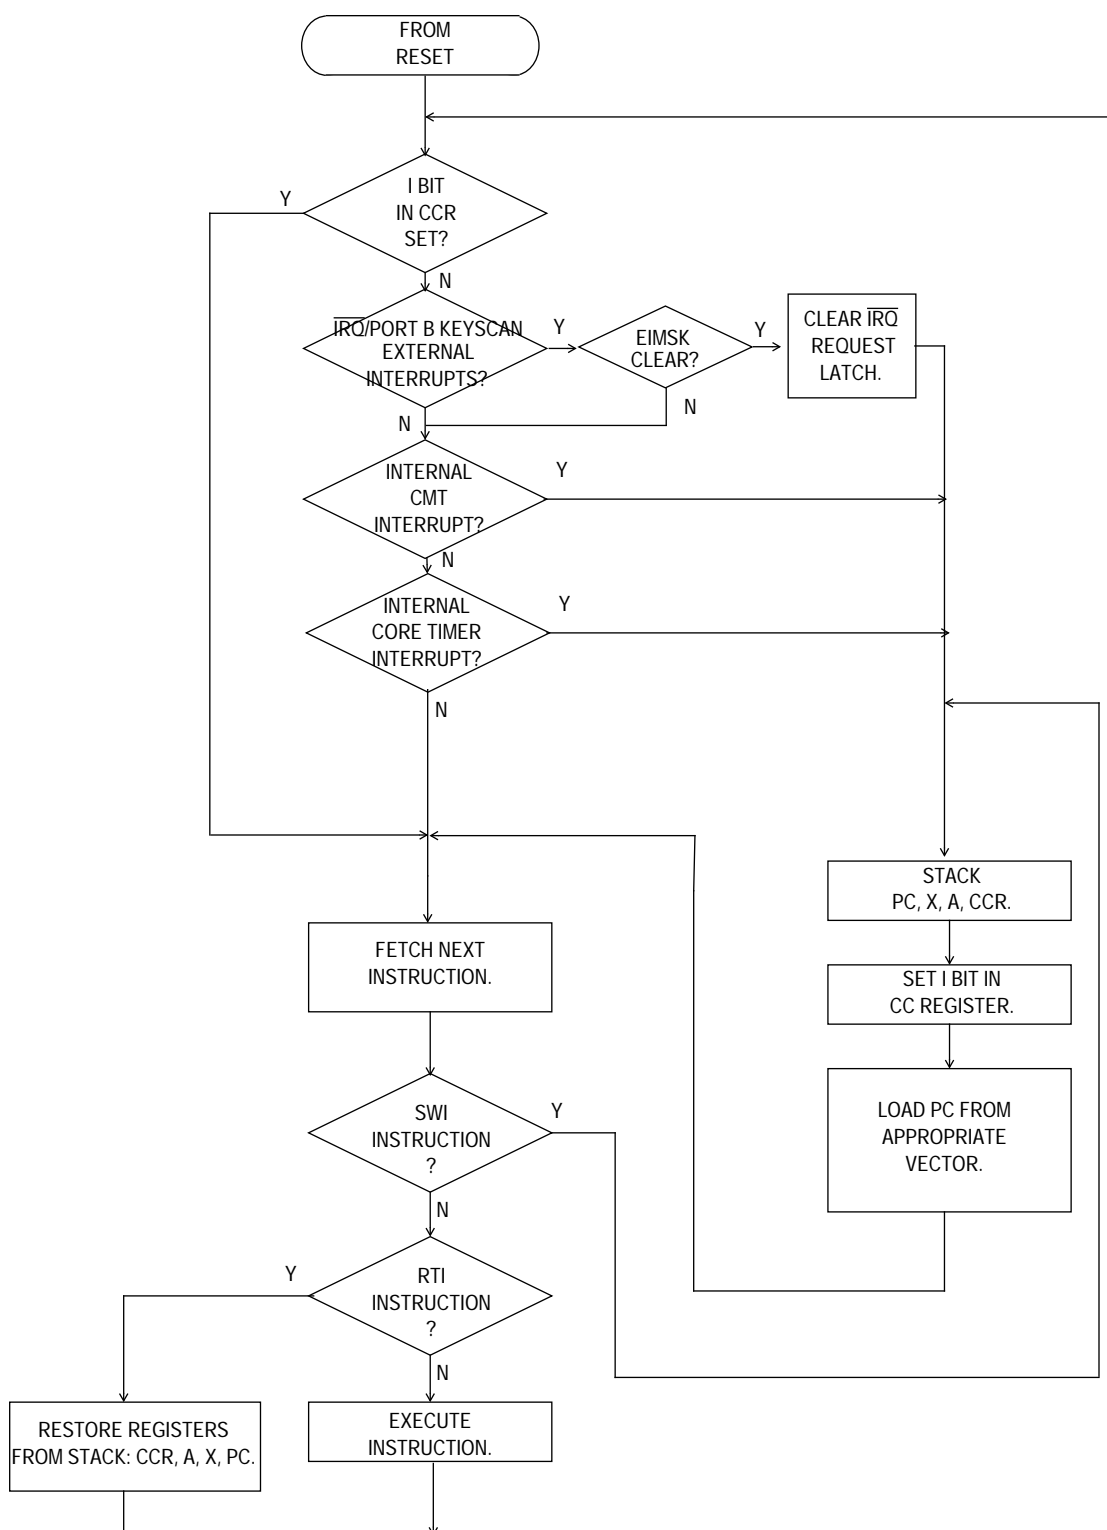


Figure 4-1. Interrupt Processing Flowchart

4.6 Hardware Interrupts

All hardware interrupts except $\overline{\text{RESET}}$ are maskable by the I bit in the CCR. If the I bit is set, all hardware interrupts (internal and external) are disabled. Clearing the I bit enables the hardware interrupts. The three types of hardware interrupts are explained in the following sections.

4.7 External Interrupt ($\overline{\text{IRQ}}$ /Port B Keyscan)

The $\overline{\text{IRQ}}$ pin provides an asynchronous interrupt to the CPU. A block diagram of the IRQ function is shown in [Figure 4-2](#).

NOTE: The BIH and BIL instructions will apply to the level on the $\overline{\text{IRQ}}$ pin itself and to the output of the logic OR function with the port B IRQ interrupts. The states of the individual port B pins can be checked by reading the appropriate port B pins as inputs.

The $\overline{\text{IRQ}}$ pin is one source of an external interrupt. All port B pins (PB0 through PB7) act as other external interrupt sources if the pullup/interrupt feature is enabled as specified by the user.

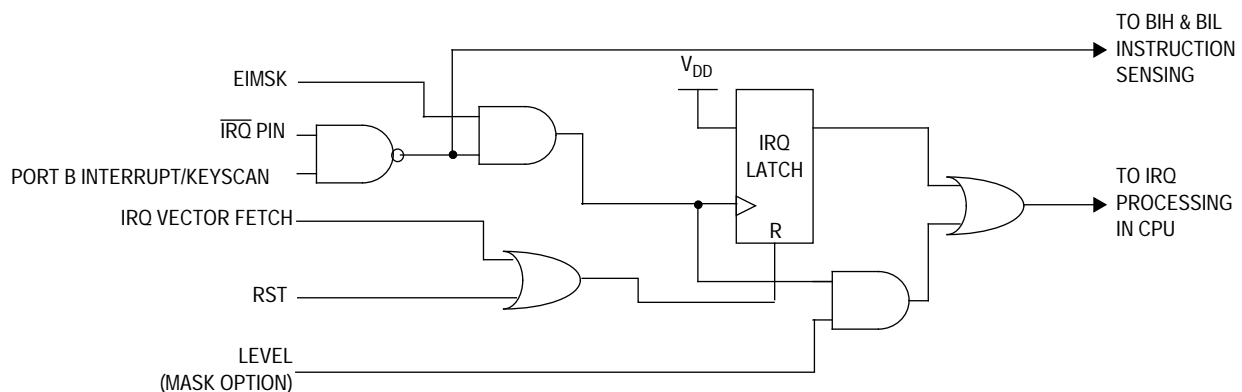


Figure 4-2. IRQ Function Block Diagram

Interrupts

When edge sensitivity is selected for the IRQ interrupt, it is sensitive to these cases:

1. Falling edge on the $\overline{\text{IRQ}}$ pin
2. Falling edge on any port B pin with pullup/interrupt enabled

When edge and level sensitivity is selected for the IRQ interrupt, it is sensitive to these cases:

1. Low level on the $\overline{\text{IRQ}}$ pin
2. Falling edge on the $\overline{\text{IRQ}}$ pin
3. Falling edge or low level on any port B pin with pullup/interrupt enabled

External interrupts also can be masked by setting the EIMSK bit in the MSCR register of the IR remote timer. See [9.5.4 Modulator Period Data Registers](#) for details.

4.8 External Interrupt Timing

If the interrupt mask bit (I bit) of the CCR is set, all maskable interrupts (internal and external) are disabled. Clearing the I bit enables interrupts. The interrupt request is latched immediately following the falling edge of the $\overline{\text{IRQ}}$ source. It is then synchronized internally and serviced as specified by the contents of \$3FFA and \$3FFB.

Either a level-sensitive and edge-sensitive trigger or an edge-sensitive-only trigger is available via the mask programmable option for the $\overline{\text{IRQ}}$ pin.

4.9 Carrier Modulator Transmitter Interrupt (CMT)

A CMT interrupt occurs when the end-of-cycle flag (EOC) and the end-of-cycle interrupt enable (EOCIE) bits are set in the modulator control and status register (MCSR). This interrupt will vector to the interrupt service routine located at the address specified by the contents of memory locations \$3FF8 and \$3FF9.

4.10 Core Timer Interrupt

This timer can create two types of interrupts. A timer overflow interrupt occurs whenever the 8-bit timer rolls over from \$FF to \$00 and the enable bit TOFE is set. A real-time interrupt occurs whenever the programmed time elapses and the enable bit RTIE is set. Either of these interrupts vectors to the same interrupt service routine, located at the address specified by the contents of memory locations \$3FF6 and \$3FF7.

Interrupts

General Release Specification — MC68HC05RC17

Section 5. Resets

5.1 Contents

5.2	Introduction	47
5.3	External Reset ($\overline{\text{RESET}}$)	48
5.4	Low-Power External Reset ($\overline{\text{LPRST}}$)	50
5.5	Internal Resets	50
5.5.1	Power-On Reset (POR)	50
5.5.2	Computer Operating Properly Reset (COPR)	51
5.5.2.1	Resetting the COP	51
5.5.2.2	COP During Wait Mode	51
5.5.2.3	COP During Stop Mode	51
5.5.2.4	COP Watchdog Timer Considerations	52
5.5.2.5	COP Register	53
5.5.3	Illegal Address	53

5.2 Introduction

The MCU can be reset from five sources: two external inputs and three internal restart conditions. The $\overline{\text{RESET}}$ and $\overline{\text{LPRST}}$ pins are inputs as shown in [Figure 5-1](#). All the internal peripheral modules will be reset by the internal reset signal (RST). Refer to [Figure 5-2](#) for reset timing detail.

Resets

5.3 External Reset ($\overline{\text{RESET}}$)

The $\overline{\text{RESET}}$ pin is one of the two external sources of a reset. This pin is connected to a Schmitt trigger input gate to provide an upper and lower threshold voltage separated by a minimum amount of hysteresis. This external reset occurs whenever the $\overline{\text{RESET}}$ pin is pulled below the lower threshold and remains in reset until the $\overline{\text{RESET}}$ pin rises above the upper threshold. This active-low input will generate the RST signal and reset the CPU and peripherals. Termination of the external RESET input or the internal COP watchdog reset are the only reset sources that can alter the operating mode of the MCU.

NOTE: Activation of the RST signal is generally referred to as reset of the device, unless otherwise specified.


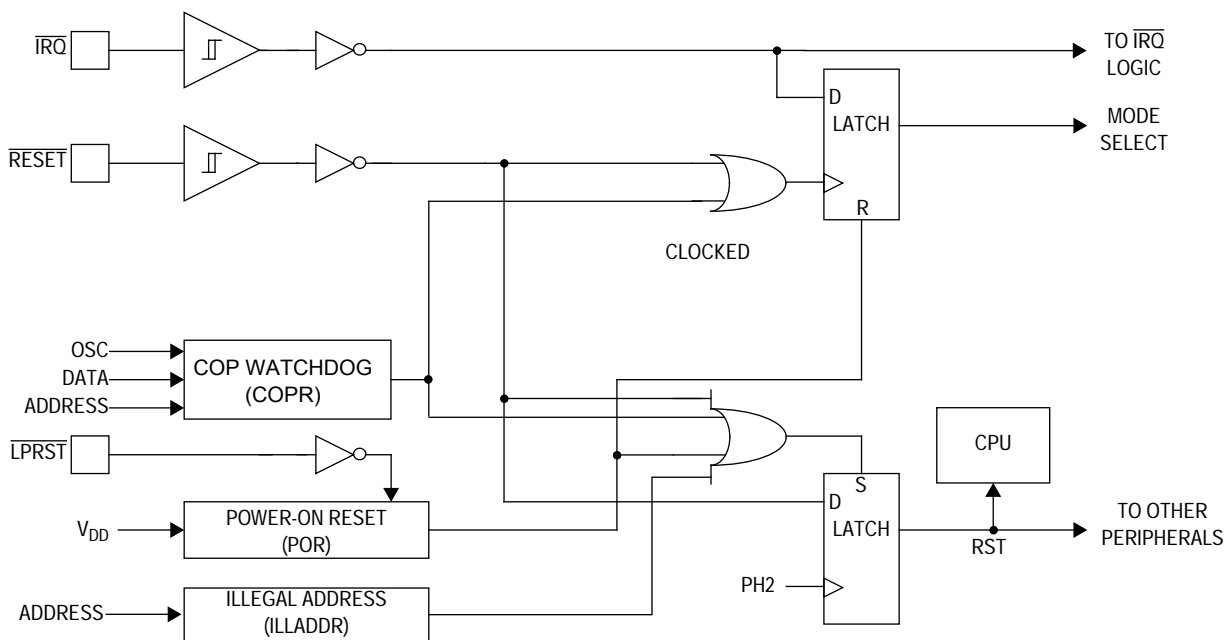


Figure 5-1. Reset Block Diagram

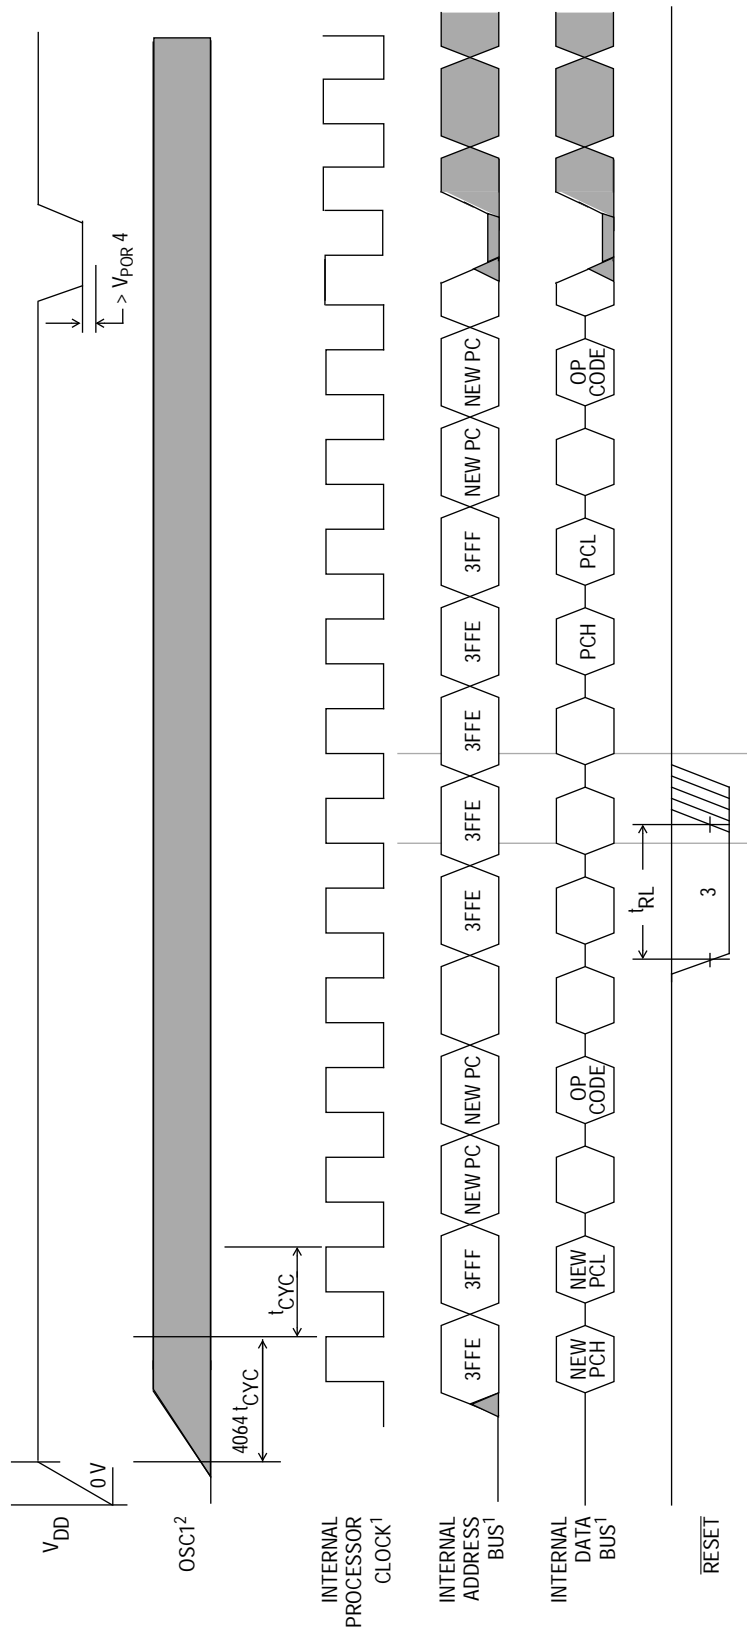

NOTES:

1. Internal timing signal and bus information are not available externally.
2. OSC1 line is not meant to represent frequency. It is only used to represent time.
3. The next rising edge of the internal processor clock following the rising edge of **RESET** initiates the reset sequence.
4. V_{DD} must fall to a level lower than V_{POR} to be recognized as a power-on reset.
5. The **LPRST** pin resets the CPU like the **RESET** pin. However, 4064 POR cycles are executed first, before the reset vector address appears on the internal address bus. (See [5.3 External Reset \(RESET\)](#).)

Figure 5-2. Reset and POR Timing Diagram

5.4 Low-Power External Reset ($\overline{\text{LPRST}}$)

The $\overline{\text{LPRST}}$ pin is one of the two external sources of a reset. This external reset occurs whenever the $\overline{\text{LPRST}}$ pin is pulled below the lower threshold and remains in reset until the $\overline{\text{LPRST}}$ pin rises. This active-low input will, in addition to generating the RST signal and resetting the CPU and peripherals, halt all internal processor clocks. The MCU will remain in this low-power reset condition as long as a logic 0 remains on LPRST. When a logic 1 is applied to LPRST, processor clocks will be re-enabled with the MCU remaining in reset until the 4064 internal processor clock cycle (t_{cyc}) oscillator stabilization delay is completed. If any other reset function is active at the end of this 4064-cycle delay, the RST signal remains in the reset condition until the other reset condition(s) end.

5.5 Internal Resets

The three internally generated resets are the initial power-on reset function, the COP watchdog timer reset, and the illegal address detector. Termination of the external reset input, external $\overline{\text{LPRST}}$ input, or the internal COP watchdog timer are the only reset sources that can alter the operating mode of the MCU. The other internal resets do not have any effect on the mode of operation when their reset state ends.

5.5.1 Power-On Reset (POR)

The internal POR is generated on power-up to allow the clock oscillator to stabilize. The POR is strictly for power turn-on conditions and is not able to detect a drop in the power supply voltage (brown-out). There is an oscillator stabilization delay of 4064 internal processor bus clock cycles (PH2) after the oscillator becomes active.

The POR generates the RST signal that resets the CPU. If any other reset function is active at the end of this 4064-cycle delay, the RST signal remains in the reset condition until the other reset condition(s) ends.

5.5.2 Computer Operating Properly Reset (COPR)

The MCU contains a watchdog timer that automatically times out if not reset (cleared) within a specific time by a program reset sequence. If the COP watchdog timer is allowed to time out, an internal reset is generated to reset the MCU. Regardless of an internal or external reset, the MCU comes out of a COP reset according to the standard rules of mode selection.

The COP reset function is enabled or disabled by a mask option and is verified during production testing.

5.5.2.1 Resetting the COP

Writing a 0 to the COPF bit prevents a COP reset. This action resets the counter and begins the time out period again. The COPF bit is bit 0 of address \$3FF0. A read of address \$3FF0 returns user data programmed at that location.

5.5.2.2 COP During Wait Mode

The COP continues to operate normally during wait mode. The software should pull the device out of wait mode periodically and reset the COP by writing to the COPF bit to prevent a COP reset.

5.5.2.3 COP During Stop Mode

When the stop enable mask option is selected, stop mode disables the oscillator circuit and thereby turns the clock off for the entire device. When stop is executed, the COP counter will hold its current state. If a reset is used to exit stop mode, the COP counter is reset and held until 4064 POR cycles are completed at which time counting will begin. If an external IRQ is used to exit stop mode, the COP counter does not wait for the completion of the 4064 POR cycles but does count these cycles. Therefore, it is recommended that the COP is fed before executing the STOP instruction.

5.5.2.4 COP Watchdog Timer Considerations

The COP watchdog timer is active in all modes of operation if enabled by a mask option. If the COP watchdog timer is selected by a mask option, any execution of the STOP instruction (either intentionally or inadvertently due to the CPU being disturbed) causes the oscillator to halt and prevents the COP watchdog timer from timing out. If the COP watchdog timer is selected by a mask option, the COP resets the MCU when it times out. Therefore, it is recommended that the COP watchdog be **disabled** for a system that must have intentional uses of the wait mode for periods longer than the COP time out period.

The recommended interactions and considerations for the COP watchdog timer, STOP instruction, and WAIT instruction are summarized in [Table 5-1](#).

Table 5-1. COP Watchdog Timer Recommendations

IF the Following Conditions Exist:	THEN the COP Watchdog Timer Should Be:
Wait Time	
Wait Time Less than COP Time Out	Enable or Disable COP by Mask Option
Wait Time More than COP Time Out	Disable COP by Mask Option
Any Length Wait Time	Disable COP by Mask Option

5.5.2.5 COP Register

The COP register is shared with the LSB of an unimplemented user interrupt vector as shown in [Figure 5-3](#). Reading this location returns whatever user data has been programmed at this location. Writing a 0 to the COPR bit in this location clears the COP watchdog timer.

Address: \$3FF0

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	X	X	X	X	X	X	X	X
Write:								COPR
Reset:	—	—	—	—	—	—	—	0


 = Unimplemented

Figure 5-3. COP Watchdog Timer Location

5.5.3 Illegal Address

An illegal address reset is generated when the CPU attempts to fetch an instruction from I/O address space (\$0000 to \$001F).

Resets

General Release Specification — MC68HC05RC17

Section 6. Low-Power Modes

6.1 Contents

6.2	Introduction	55
6.3	Stop Mode	55
6.4	Wait Mode	56
6.5	Low-Power Reset	58

6.2 Introduction

This section describes the low-power modes.

6.3 Stop Mode

The STOP instruction places the MCU in its lowest power-consumption mode. In stop mode, the internal oscillator is turned off, halting all internal processing, including timer operation.

During the stop mode, the CTCSR (\$08) bits are altered to remove any pending timer interrupt request and to disable any further timer interrupts. The timer prescaler is cleared. The I bit in the CCR is cleared to enable external interrupts. All other registers and memory remain unaltered. All input/output lines remain unchanged.

The processor can be brought out of stop mode only by an external interrupt or $\overline{\text{RESET}}$. Refer to [Figure 6-1](#).

NOTE: *If an external interrupt is pending when stop mode is entered, then stop mode will be exited immediately.*

Low-Power Modes

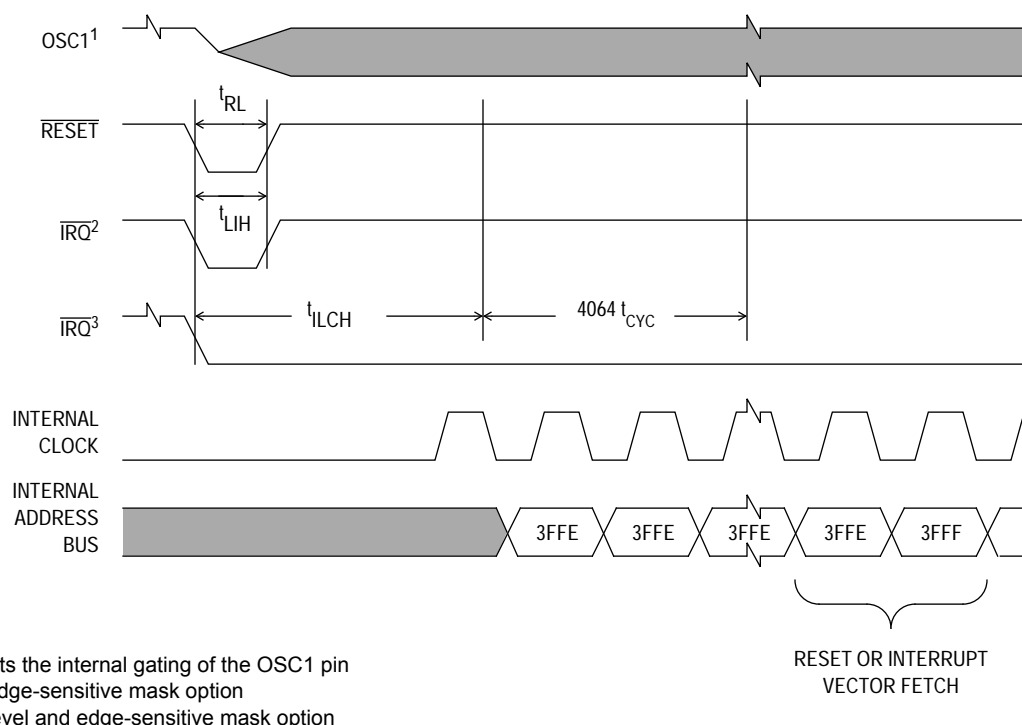


Figure 6-1. Stop Recovery Timing Diagram

NOTE: The *EIMSK* bit of the carrier modulator transmitter *MCSR* (modulator control and status register) is not cleared automatically by the execution of a *STOP* instruction. Care should be taken to clear this bit before entering stop mode.

6.4 Wait Mode

The *WAIT* instruction places the MCU in a low power-consumption mode, but wait mode consumes more power than stop mode. All CPU action is suspended, but the core timer, the oscillator, and any enabled module remain active. Any interrupt or reset will cause the MCU to exit wait mode. The user must shut off subsystems to reduce power consumption. Wait current specifications assume CPU operation only and do not include current consumption by any other subsystems.

During wait mode, the I bit in the CCR is cleared to enable interrupts. All other registers, memory, and input/output lines remain in their previous states. The timer may be enabled to allow a periodic exit from wait mode.

NOTE: For minimum current consumption, the phase-locked loop (PLL) should be disabled or turned off before entering wait mode.

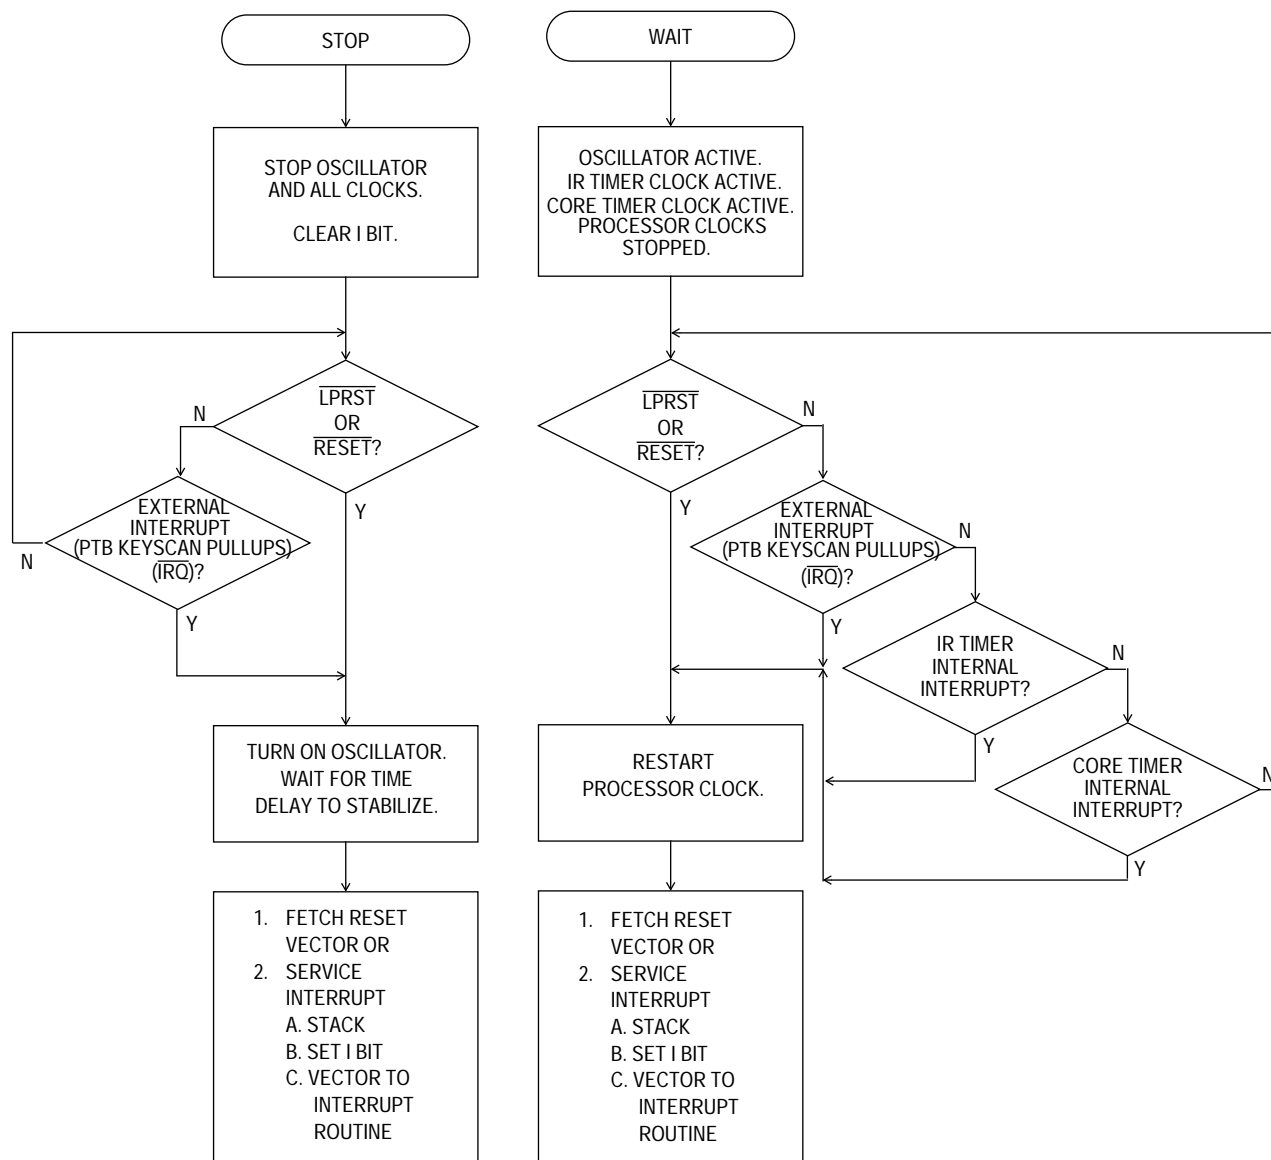


Figure 6-2. Stop/Wait Flowchart

6.5 Low-Power Reset

Low-power reset mode is entered when a logic 0 is detected on the $\overline{\text{LPRST}}$ pin. When in this mode (as long as $\overline{\text{LPRST}}$ is held low), the MCU is held in reset and all internal clocks are halted. Applying a logic 1 to $\overline{\text{LPRST}}$ will cause the part to exit low-power reset mode and begin counting out the 4064-cycle oscillator stabilization period. Once this time has elapsed, the MCU will begin operation from the reset vectors (\$3FFE–\$3FFF).

General Release Specification — MC68HC05RC17

Section 7. Parallel Input/Output (I/O)

7.1 Contents

7.2	Introduction	59
7.3	Port A	60
7.4	Port B	60
7.5	Port C	61
7.6	Input/Output (I/O) Programming	61

7.2 Introduction

In user mode, 18 lines are arranged as one 2-bit and two 8-bit I/O ports. These ports are programmable as either inputs or outputs under software control of the data direction registers.

NOTE: *To avoid a glitch on the output pins, write data to the I/O port data register before writing a 1 to the corresponding data direction register.*

Four extra I/O ports are available on higher pin count packages. Consult factory for availability.

Parallel Input/Output (I/O)

7.3 Port A

Port A is an 8-bit bidirectional port which does not share any of its pins with other subsystems. The port A data register is at \$0000 and the data direction register (DDR) is at \$0004. Reset does not affect the data register, but clears the data direction register, thereby returning the ports to inputs. Writing a 1 to a DDR bit sets the corresponding port bit to output mode.

7.4 Port B

Port B is an 8-bit bidirectional port which does not share any of its pins with other subsystems. The address of the port B data register is \$0001 and the data direction register (DDR) is at address \$0005. Reset does not affect the data register, but clears the data direction register, thereby returning the ports to inputs. Writing a 1 to a DDR bit sets the corresponding port bit to output mode. Each of the port B pins has a mask programmable pullup device that can be enabled. When the pullup device is enabled, this pin will also become an interrupt pin. The edge or edge and level sensitivity of the $\overline{\text{IRQ}}$ pin will also pertain to the enabled port B pins. Care needs to be taken when using port B pins that have the pullup enabled. Before switching from an output to an input, the data should be preconditioned to a logic 1 or the I bit should be set in the condition code register to prevent an interrupt from occurring.

NOTE: When a port B pin is configured as an output, its corresponding keyscan interrupt is disabled, regardless of its mask option.

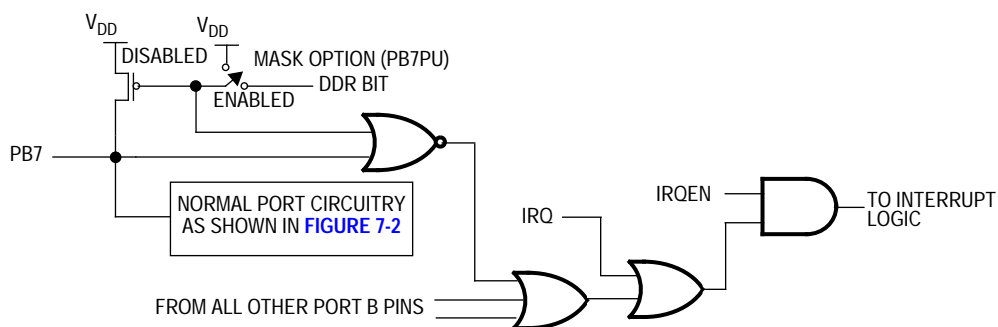


Figure 7-1. Port B Pullup Option

7.5 Port C

Port C is a 6-bit bidirectional port (PC0–PC1 and PC4–PC7) which does not share any of its pins with other subsystems. The port C data register is at \$0002 and the data direction register (DDR) is at \$0006. Reset does not affect the data register, but clears the data direction register, thereby returning the ports to inputs. Writing a 1 to a DDR bit sets the corresponding port bit to output mode. Port C pins PC4 through PC7 are available only in higher pin count (>28 pin) packages.

NOTE: *Only two bits of port C are bonded out in 28-pin packages for the MC68HC05RC17, although port C is truly a 6-bit port. Since pins PC4–PC7 are unbonded, software should include the code to set their respective data direction register locations to outputs to avoid floating inputs.*

7.6 Input/Output (I/O) Programming

Port pins may be programmed as inputs or outputs under software control. The direction of the pins is determined by the state of the corresponding bit in the port data direction register (DDR). Each I/O port has an associated DDR. Any I/O port pin is configured as an output if its corresponding DDR bit is set to a logic 1. A pin is configured as an input if its corresponding DDR bit is cleared to a logic 0.

At power-on or reset, all DDRs are cleared, which configures all pins as inputs. The data direction registers are capable of being written to or read by the processor. During the programmed output state, a read of the data register actually reads the value of the output data latch and not the I/O pin.

Parallel Input/Output (I/O)

Table 7-1. I/O Pin Functions

R/W	DDR	I/O Pin Functions
0	0	The I/O pin is in input mode. Data is written into the output data latch.
0	1	Data is written into the output data latch and output to the I/O pin.
1	0	The state of the I/O pin is read.
1	1	The I/O pin is in an output mode. The output data latch is read.

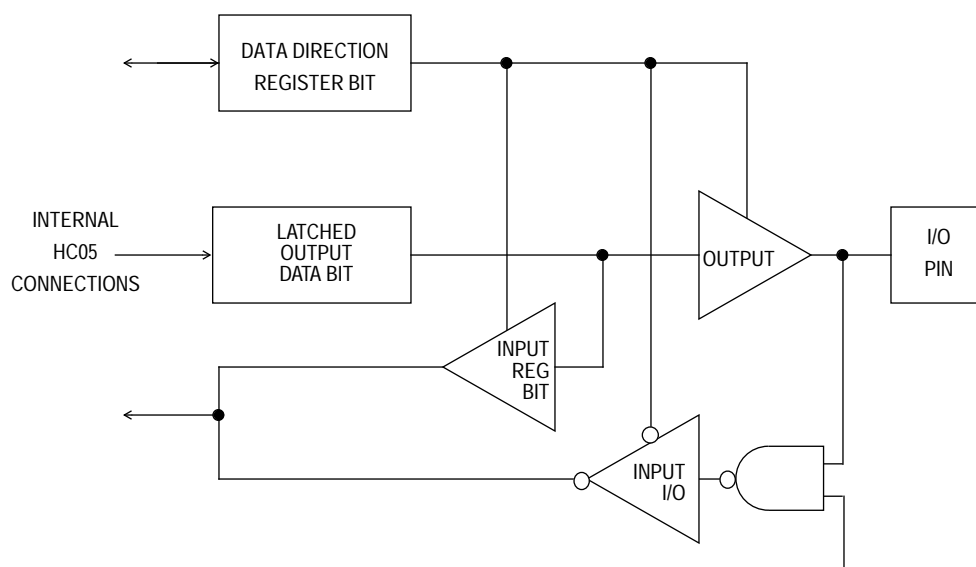


Figure 7-2. I/O Circuitry

General Release Specification — MC68HC05RC17

Section 8. Core Timer

8.1 Contents

8.2 Introduction63

8.3 Core Timer Control and Status Register.....65

8.4 Core Timer Counter Register67

8.5 Computer Operating Properly (COP) Reset.....67

8.6 Timer During Wait Mode.....68

8.2 Introduction

The core timer for this device is a 14-stage multifunctional ripple counter. Features include timer overflow, power-on reset (POR), real-time interrupt (RTI), and COP watchdog timer.

As seen in **Figure 8-1**, the internal peripheral clock is divided by four, and then drives an 8-bit ripple counter. The value of this 8-bit ripple counter can be read by the CPU at any time by accessing the core timer counter register (CTCR) at address \$09. A timer overflow function is implemented on the last stage of this counter, giving a possible interrupt rate of the internal peripheral clock(E)/1024. This point is then followed by three more stages, with the resulting clock (E/4096) driving the real-time interrupt circuit (RTI). The RTI circuit consists of three divider stages with a one-of-four selector. The output of the RTI circuit is further divided by eight to drive the mask optional COP watchdog timer circuit. The RTI rate selector bits and the RTI and CTOF enable bits and flags are located in the timer control and status register at location \$08.

Core Timer

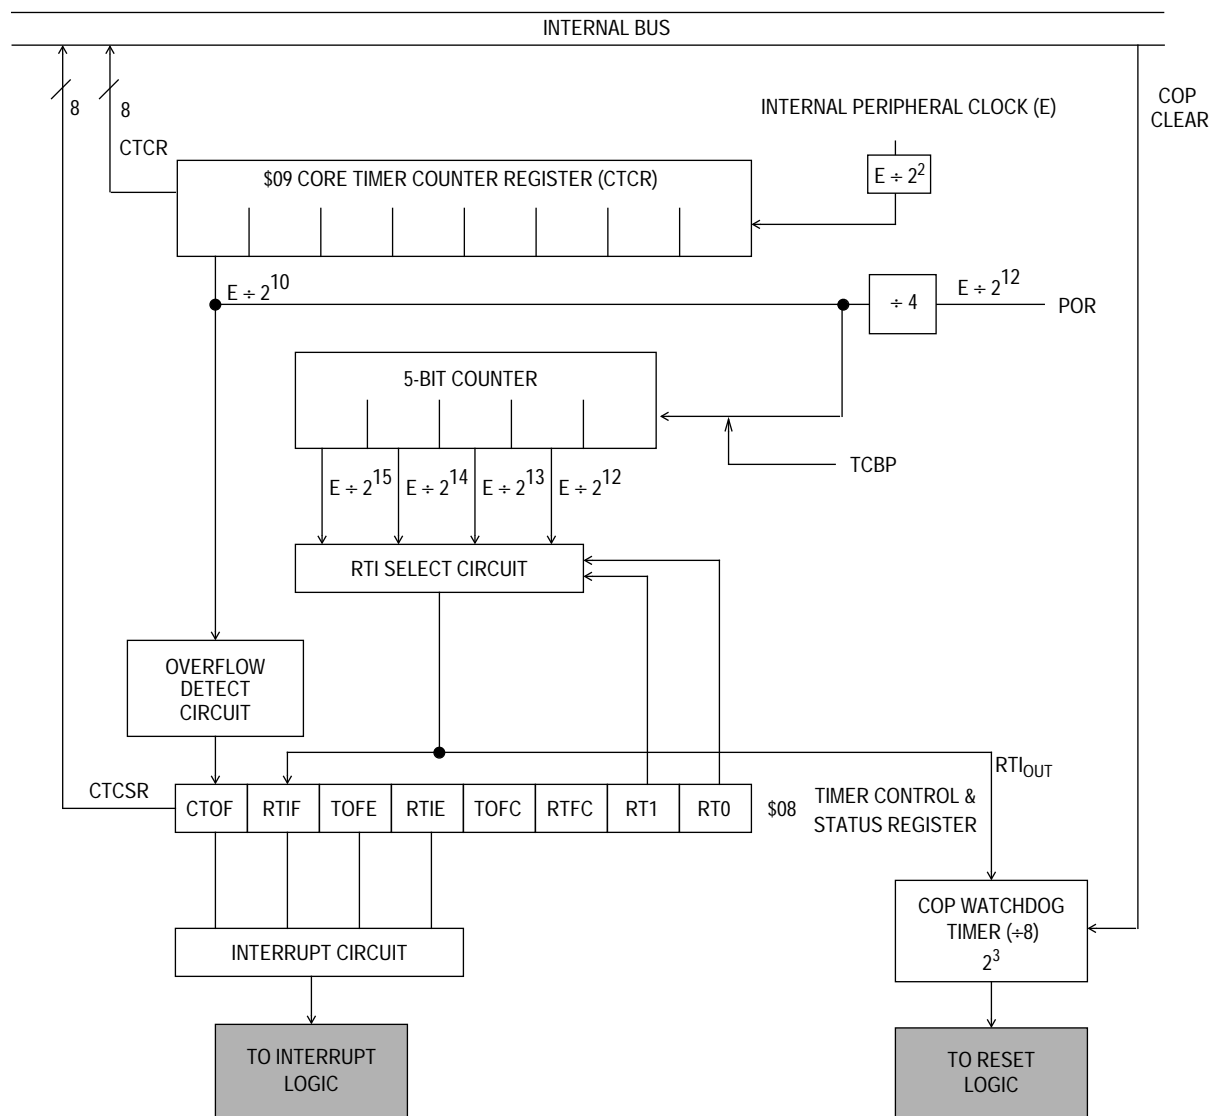


Figure 8-1. Core Timer Block Diagram

8.3 Core Timer Control and Status Register

The CTCSR contains the timer interrupt flag, the timer interrupt enable bits, and the real-time interrupt rate select bits. [Figure 8-2](#) shows the value of each bit in the CTCSR when coming out of reset.

Address: \$0008

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	CTOF	RTIF	TOFE	RTIE	0	0	RT1	RT0
Write:					TOFC	RTFC		
Reset:	0	0	0	0	0	0	1	1


 = Unimplemented

Figure 8-2. Core Timer Control and Status Register (CTCSR)

CTOF — Core Timer Overflow

CTOF is a read-only status bit set when the 8-bit ripple counter rolls over from \$FF to \$00. Clearing the CTOF is done by writing a 1 to TOFC. Writing to this bit has no effect. Reset clears CTOF.

RTIF — Real-Time Interrupt Flag

The real-time interrupt circuit consists of a 3-stage divider and a one-of-four selector. The clock frequency that drives the RTI circuit is $E/2^{12}$ (or $E \div 4096$) with three additional divider stages, giving a maximum interrupt period of 16 milliseconds at a bus rate of 2.024 MHz. RTIF is a clearable, read-only status bit and is set when the output of the chosen (one-of-four selection) stage goes active. Clearing the RTIF is done by writing a 1 to RTFC. Writing has no effect on this bit. Reset clears RTIF.

TOFE — Timer Overflow Enable

When this bit is set, a CPU interrupt request is generated when the CTOF bit is set. Reset clears this bit.

RTIE — Real-Time Interrupt Enable

When this bit is set, a CPU interrupt request is generated when the RTIF bit is set. Reset clears this bit.

Core Timer

TOFC — Timer Overflow Flag Clear

When a 1 is written to this bit, CTOF is cleared. Writing a 0 has no effect on the CTOF bit. This bit always reads as 0.

RTFC — Real-Time Interrupt Flag Clear

When a 1 is written to this bit, RTIF is cleared. Writing a 0 has no effect on the RTIF bit. This bit always reads as 0.

RT1 and RT0 — Real-Time Interrupt Rate Select

These two bits select one of four taps from the real-time interrupt circuit. Refer to [Table 8-1](#). Reset sets these two bits which selects the lowest periodic rate and gives the maximum time in which to alter these bits if necessary. Care should be taken when altering RT0 and RT1 if the time out period is imminent or uncertain. If the selected tap is modified during a cycle in which the counter is switching, an RTIF could be missed or an additional one could be generated. To avoid problems, the COP should be cleared before changing RTI taps.

Table 8-1. RTI and COP Rates at 4.096-MHz Oscillator

RTI Rate 2.048-MHz Bus		RT1 and RT0	Minimum COP Rates 2.048-MHz Bus	
2 ms	$2^{12} \div E$	00	$(2^{15}-2^{12})/E$	14 ms
4 ms	$2^{13} \div E$	01	$(2^{16}-2^{13})/E$	28 ms
8 ms	$2^{14} \div E$	10	$(2^{17}-2^{14})/E$	56 ms
16 ms	$2^{15} \div E$	11	$(2^{18}-2^{15})/E$	112 ms

8.4 Core Timer Counter Register

The timer counter register is a read-only register that contains the current value of the 8-bit ripple counter at the beginning of the timer chain. This counter is clocked by the CPU clock (E/4) and can be used for various functions, including a software input capture. Extended time periods can be attained using the TOF function to increment a temporary RAM storage location, thereby simulating a 16-bit (or more) counter.

Address: \$0009

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	D7	D6	D5	D4	D3	D2	D1	D0
Write:								
Reset:	0	0	0	0	0	0	0	0


 = Unimplemented

Figure 8-3. Core Timer Counter Register (CTCR)

The power-on cycle clears the entire counter chain and begins clocking the counter. After 4064 cycles, the power-on reset circuit is released, which again clears the counter chain and allows the device to come out of reset. At this point, if $\overline{\text{RESET}}$ is not asserted, the timer starts counting up from zero and normal device operation begins. When $\overline{\text{RESET}}$ is asserted any time during operation (other than POR and low-power reset), the counter chain is cleared.

8.5 Computer Operating Properly (COP) Reset

The COP watchdog timer function is implemented on this device by using the output of the RTI circuit and further dividing it by eight. The minimum COP reset rates are listed in [Table 8-1](#). If the COP circuit times out, an internal reset is generated and the normal reset vector is fetched. Preventing a COP time out or clearing the COP is accomplished by writing a 0 to bit 0 of address \$3FF0. When the COP is cleared, only the final divide-by-eight stage (output of the RTI) is cleared.

If the COP watchdog timer is allowed to time out, an internal reset is generated to reset the MCU.

The COP remains enabled after execution of the WAIT instruction and all associated operations apply. If the STOP instruction is disabled, execution of STOP instruction causes the CPU to execute a no operation (NOP) instruction. In addition, the COP is prohibited from being held in reset. This prevents a device lock-up condition.

This COP's objective is to make it impossible for this device to become stuck or locked-up and to be sure the COP is able to rescue the part from any situation where it might entrap itself in abnormal or unintended behavior. This function is a mask option.

8.6 Timer During Wait Mode

The CPU clock halts during wait mode, but the timer remains active. If interrupts are enabled, a timer interrupt will cause the processor to exit wait mode. The COP is always enabled while in user mode.

General Release Specification — MC68HC05RC17

Section 9. Carrier Modulator Transmitter (CMT)

9.1 Contents

9.2	Introduction	69
9.3	Overview	70
9.4	Carrier Generator	72
9.4.1	Time Counter	73
9.4.2	Carrier Generator Data Registers	74
9.5	Modulator	76
9.5.1	Time Mode	77
9.5.2	FSK Mode	79
9.5.3	Extended Space Operation	80
9.5.3.1	End-of-Cycle (EOC) Interrupt	81
9.5.3.2	Modulator Control and Status Register	82
9.5.4	Modulator Period Data Registers	85

9.2 Introduction

The carrier modulator transmitter (CMT) module provides a means to generate the protocol timing and carrier signals for a wide variety of encoding schemes. It incorporates hardware to off-load the critical and/or lengthy timing requirements associated with code generation from the CPU, releasing much of its bandwidth to handle other tasks such as code data generation, data decompression, or keyboard scanning. The CMT does not include dedicated hardware configurations for specific protocols but is intended to be sufficiently programmable in its function to handle the timing requirements of most protocols with

Carrier Modulator Transmitter (CMT)

minimal CPU intervention. When disabled, certain CMT registers can be used to change the state of the infrared out pin (IRO) directly. This feature allows for the generation of future protocols not readily producible by the current architecture.

9.3 Overview

The module consists of carrier generator, modulator, and transmitter output blocks. The block diagram is shown in [Figure 9-1](#).

The carrier generator has a resolution of 500 ns with a 2-MHz oscillator. The user may independently define the high and low times of the carrier signal to determine both period and duty cycle. The carrier generator can generate signals with periods between 1 μ s (1 MHz) and 64 μ s (15.6 kHz) in steps of 500 ns. The possible duty cycle options will depend upon the number of counts required to complete the carrier period. For example, a 400-kHz signal has a period of 2.5 μ s and will therefore require 5 x 500 ns counts to generate. These counts may be split between high and low times so the duty cycles available will be 20% (one high, four low), 40% (two high, three low), 60% (three high, two low) and 80% (four high, one low). For lower frequency signals with larger periods, higher resolution (as a percentage of the total period) duty cycles are possible. The carrier generator may select between two sets of high and low times. When operating in normal mode (subsequently referred to as time mode), just one set will be used. When operating in FSK (frequency shift key) mode, the generator will toggle between the two sets when instructed to do so by the modulator, allowing the user to dynamically switch between two carrier frequencies without CPU intervention. When the BASE bit in the modulator control and status register (MCSR) is set, the carrier output to the modulator is held high continuously to allow for the generation of baseband protocols. See [9.4 Carrier Generator](#).

The modulator provides a simple method to control protocol timing. The modulator has a resolution of 4 μ s with a 2-MHz oscillator. It can count system clocks to provide real-time control or it can count carrier clocks for self-clocked protocols. It can either gate the carrier onto the

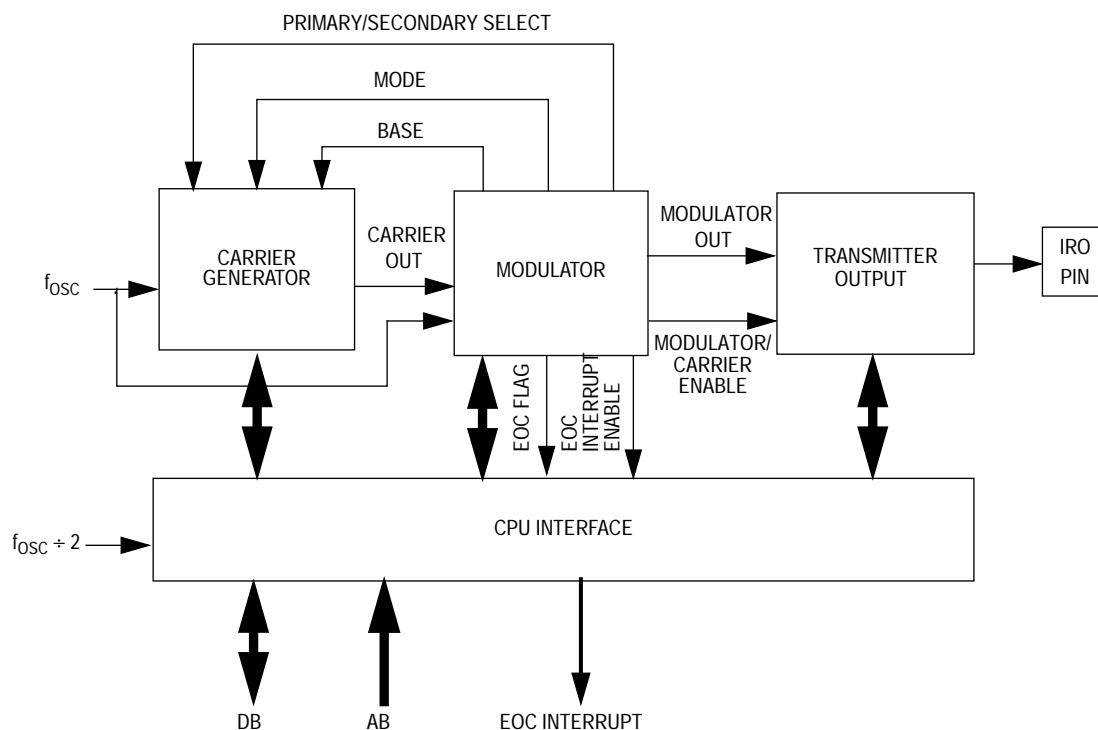


Figure 9-1. Carrier Modulator Transmitter Module Block Diagram

modulator output (TIME), control the logic level of the modulator output (baseband) or directly route the carrier to the modulator output while providing a signal to switch the carrier generator between high/low time register buffers (FSK). See [9.5 Modulator](#).

The transmitter output block controls the state of the infrared out pin (IRO). The modulator output is gated on to the IRO pin when the modulator/carrier generator is enabled. Otherwise, the IRO pin is controlled by the state of the IRO latch, which is directly accessible to the CPU by means of bit 7 of the carrier generator data registers CHR1 and CLR1. The IRO latch can be written to on either edge of the internal bus clock ($f_{osc}/2$), allowing for IR waveforms which have a resolution of twice the bus clock frequency (f_{osc}). See [9.4.2 Carrier Generator Data Registers](#).

Carrier Modulator Transmitter (CMT)

9.4 Carrier Generator

The carrier signal is generated by counting a predetermined number of input clocks (500 ns for a 2-MHz oscillator) for both the carrier high time and the carrier low time. The period is determined by the total number of clocks counted. The duty cycle is determined by the ratio of high time clocks to total clocks counted. The high and low time values are user programmable and are held in two registers. An alternate set of high/low count values is held in another set of registers to allow the generation of dual frequency FSK (frequency shift keying) protocols without CPU intervention. The MCGEN bit in the MCSR must be set and the BASE bit in the MCSR must be cleared to enable carrier generator clocks. The block diagram is shown in [Figure 9-2](#).

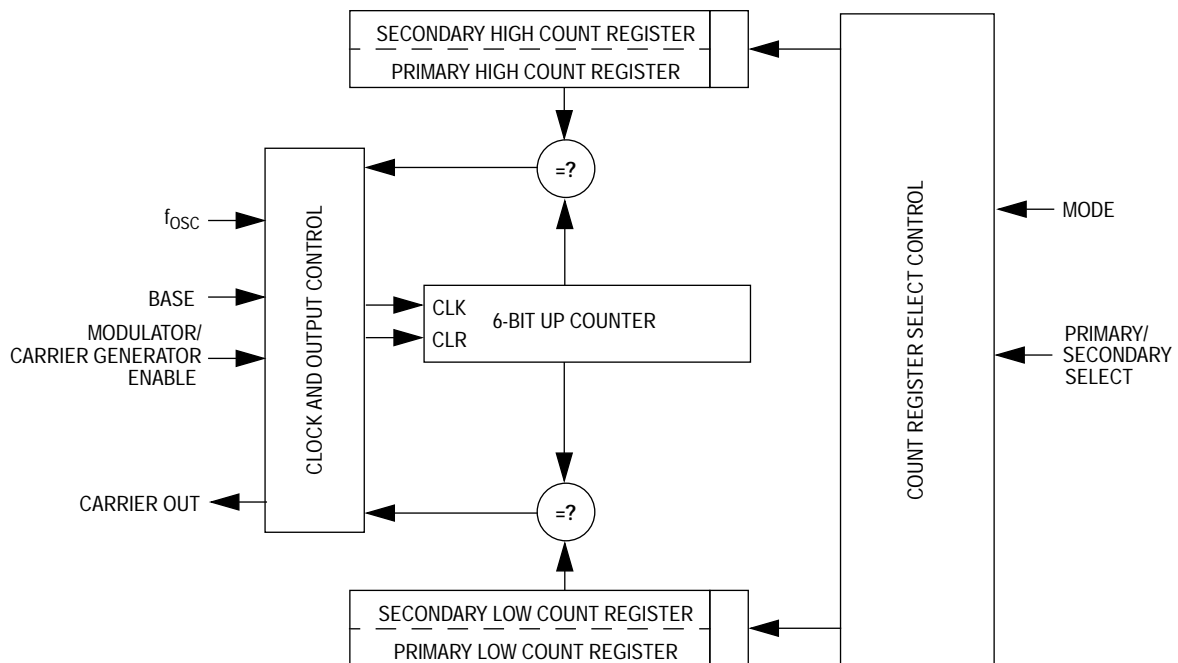


Figure 9-2. Carrier Generator Block Diagram

9.4.1 Time Counter

The high/low time counter is a 6-bit up counter. After each increment, the contents of the counter are compared with the appropriate high or low count value register. When this value is reached, the counter is reset and the compare is redirected to the other count value register. Assuming that the high time count compare register is currently active, a valid compare will cause the carrier output to be driven low. The counter will continue to increment and when reaching the value stored in the selected low count value register, it will be cleared and will cause the carrier output to be driven high. The cycle repeats, automatically generating a periodic signal which is directed to the modulator. The lowest frequency (maximum period) and highest frequency (minimum period) which can be generated are.

$$f_{\min} = f_{\text{osc}} \div (2 \times (2^6 - 1)) \text{ Hz}$$

$$f_{\max} = f_{\text{osc}} \div (2 \times 1) \text{ Hz}$$

In the general case, the carrier generator output frequency is:

$$f_{\text{out}} = f_{\text{osc}} \div (\text{Highcount} + \text{Lowcount}) \text{ Hz}$$

Where: $0 < \text{Highcount} < 64$ and
 $0 < \text{Lowcount} < 64$

NOTE: *These equations assume the DIV2 bit (bit 6) of the MCSR is clear. When the DIV2 bit is set, the carrier generator frequency will be half of what is shown in these equations.*

The duty cycle of the carrier signal is controlled by varying the ratio of high time to low + high time. As the input clock period is fixed, the duty cycle resolution will be proportional to the number of counts required to generate the desired carrier period.

$$\text{Duty Cycle} = \frac{\text{Highcount}}{\text{Highcount} + \text{Lowcount}}$$

Carrier Modulator Transmitter (CMT)

9.4.2 Carrier Generator Data Registers

The carrier generator contains two, 7-bit data registers: primary high time (CHR1), primary low time (CLR1); and two, 6-bit data registers: secondary high time (CHR2) and secondary low time (CLR2). Bit 7 of CHR1 and CHR2 is used to read and write the IRO latch.

CHR1 Address: \$0010

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	IROLN	CMTPOL	PH5	PH4	PH3	PH2	PH1	PH0
Write:								
Reset:	0	0	U	U	U	U	U	U

U = Unaffected

CLR1 Address: \$0011

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	IROLP	0	PL5	PL4	PL3	PL2	PL1	PL0
Write:								
Reset:	0	0	U	U	U	U	U	U

U = Unaffected

CHR2 Address: \$0012

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	SH5	SH4	SH3	SH2	SH1	SH0
Write:								
Reset:	0	0	U	U	U	U	U	U

U = Unaffected

CLR2 Address: \$0013

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	0	SL5	SL4	SL3	SL2	SL1	SL0
Write:								
Reset:	0	0	U	U	U	U	U	U

U = Unaffected

Figure 9-3. Carrier Data Register (CHR1, CLR1, CHR2, and CLR2)

**PH0–PH5 and PL0–PL5 — Primary Carrier High
and Low Time Data Values**

When selected, these bits contain the number of input clocks required to generate the carrier high and low time periods. When operating in time mode (see [9.5.1 Time Mode](#)), this register pair is always selected. When operating in FSK mode (see [9.5.2 FSK Mode](#)), this register pair and the secondary register pair are alternately selected under control of the modulator. The primary carrier high and low time values are undefined out of reset. These bits must be written to non-zero values before the carrier generator is enabled to avoid spurious results.

NOTE: *Writing to CHR1 to update PH0–PH5 or to CLR1 to update PL0–PL5 will also update the IRO latch. When MCGEN (bit 0 in the MCSR) is clear, the IRO latch value appears on the IRO output pin. Care should be taken that bit 7 of the data to be written to CHR1 or CHL1 should contain the desired state of the IRO latch.*

**SH0–SH5 and SL0–SL5 — Secondary Carrier High
and Low Time Data Values**

When selected, these bits contain the number of input clocks required to generate the carrier high and low time periods. When operating in time mode (see [9.5.1 Time Mode](#)), this register pair is never selected. When operating in FSK mode (see [9.5.2 FSK Mode](#)), this register pair and the secondary register pair are alternately selected under control of the modulator. The secondary carrier high and low time values are undefined out of reset. These bits must be written to nonzero values before the carrier generator is enabled when operating in FSK mode.

IROLN and IROLP — IRO Latch Control

Reading IROLN or IROLP reads the state of the IRO latch. Writing IROLN updates the IRO latch with the data being written on the negative edge of the internal processor clock ($f_{osc}/2$). Writing IROLP updates the IRO latch on the positive edge of the internal processor clock; for example, one f_{osc} period later. The IRO latch is clear out of reset.

Carrier Modulator Transmitter (CMT)

NOTE: Writing to CHR1 to update IROLN or to CLR1 to update IROLP will also update the primary carrier high and low data values. Care should be taken that bits 5–0 of the data to be written to CHR1 or CHL1 should contain the desired values for the primary carrier high or low data.

9.5 Modulator

The modulator consists of a 12-bit down counter with underflow detection which is loaded from the modulation mark period from the mark buffer register, MBUFF. When this counter underflows, the modulator gate is closed and a 12-bit comparator is enabled which continually compares the logical complement of the contents of the (still) decrementing counter with the contents of the modulation space period register, SREG. When a match is obtained, the modulator control gate is opened again. Should SREG = 0, the match will be immediate and no space period will be generated (for instance, for FSK protocols which require successive bursts of different frequencies). When the match occurs, the counter is reloaded with the contents of MBUFF, SREG is reloaded with the contents of its buffer, SBUFF, and the cycle repeats. The MCGEN bit in the MCSR must be set to enable the modulator timer. The 12-bit MBUFF and SBUFF registers are accessed through three 8-bit modulator period registers, MDR1, MDR2, and MDR3.

The modulator can operate in two modes, time or FSK. In time mode the modulator counts clocks derived from the system oscillator and modulates a single-carrier frequency or no carrier (baseband). In FSK mode, the modulator counts carrier periods and instructs the carrier generator to alternate between two carrier frequencies whenever a modulation period (mark + space counts) expires.

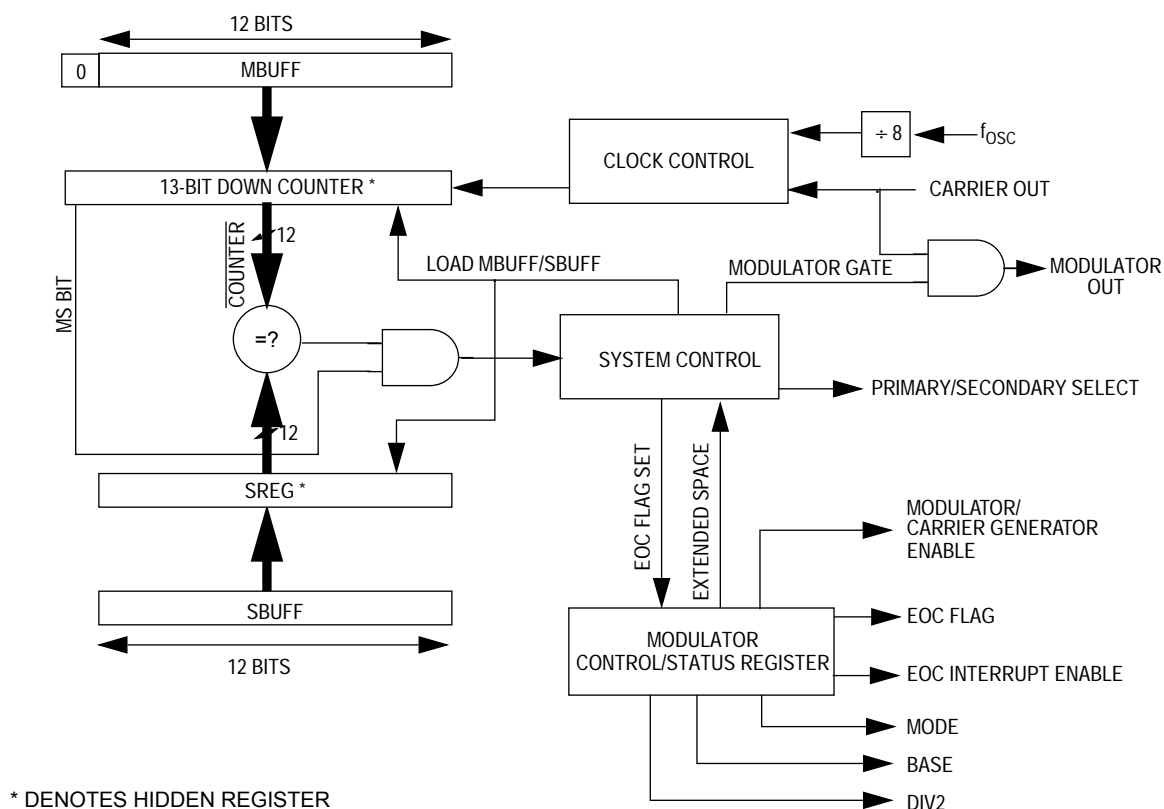


Figure 9-4. Modulator Block Diagram

9.5.1 Time Mode

When the modulator operates in time mode, the modulation mark and space periods consist of zero or an integer number of $f_{osc} \div 8$ clocks (= 250 kHz @ 2 MHz osc). This provides a modulator resolution of 4 μ s and a maximum mark and space periods of about 16 ms (each). However, to prevent carrier glitches which could affect carrier spectral purity, the modulator control gate and carrier clock are synchronized. The carrier signal is activated when the modulator gate opens. The modulator gate can only close when the carrier signal is low. (The output logic level during space periods is low). If the carrier generator is in baseband mode (BASE bit in MCSR is high), the modulator output will be at a logic 1 for the duration of the mark period and at a logic 0 for the duration of a space period. See Figure 9-5.

The mark and space time equations are:

$$t_{\text{mark}} = \frac{(\text{MBUFF} + 1) \times 8}{f_{\text{osc}}} \text{secs}$$

$$t_{\text{space}} = \frac{\text{SBUFF} \times 8}{f_{\text{osc}}} \text{secs}$$

Setting the DIV2 bit in the MCSR will double mark and space times.

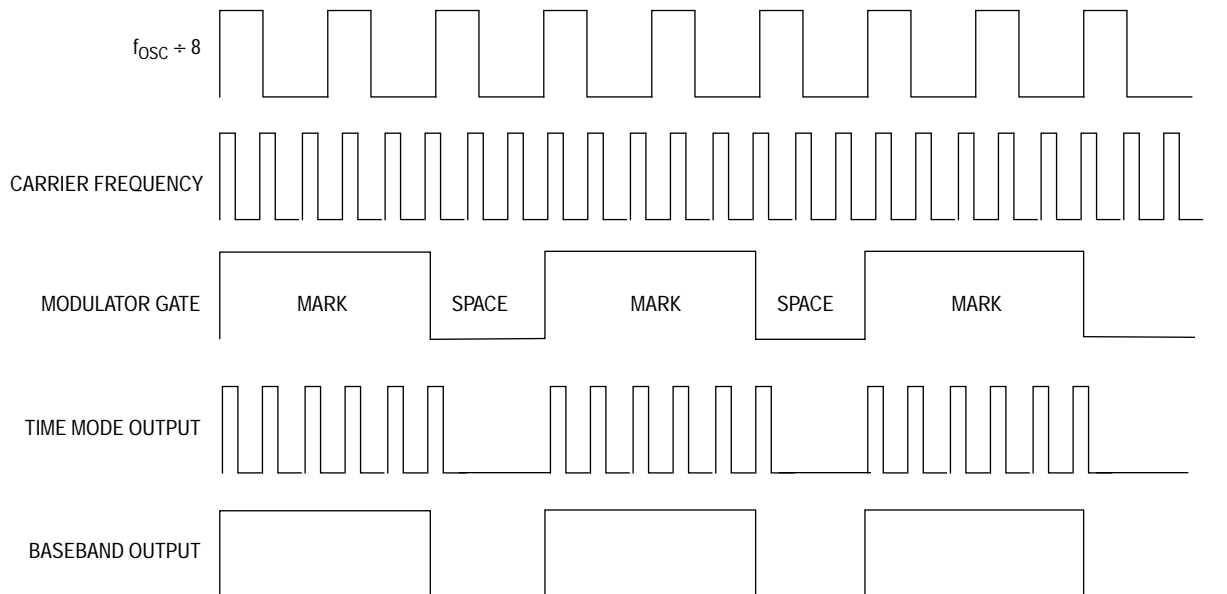


Figure 9-5. CMT Operation in Time Mode

9.5.2 FSK Mode

When the modulator operates in FSK mode, the modulation mark and space periods consist of an integer number of carrier clocks (space period can be zero). When the mark period expires, the space period is transparently started (as in time mode); however, in FSK mode the carrier switches between data registers in preparation for the next mark period. The carrier generator toggles between primary and secondary data register values whenever the modulator mark period expires. The space period provides an interpulse gap (no carrier), but if SBUFF = 0, then the modulator and carrier generator will switch between carrier frequencies without a gap or any carrier glitches (zero space).

Using timing data for carrier burst and interpulse gap length calculated by the CPU, FSK mode automatically can generate a phase-coherent, dual-frequency FSK signal with programmable burst and interburst gaps.

The mark and space time equations for FSK mode are:

$$t_{\text{mark}} = \frac{\text{MBUFF} + 1}{f_{\text{cg}}} \text{secs}$$

$$t_{\text{space}} = \frac{\text{SBUFF}}{f_{\text{cg}}} \text{secs}$$

Where f_{cg} is the frequency output from the carrier generator, setting the DIV2 bit in the MCSR will double mark and space times.

Carrier Modulator Transmitter (CMT)

9.5.3 Extended Space Operation

In either time or FSK mode, the space period can be made longer than the maximum possible value of SBUFF. Setting the EXSPC bit in the MCSR will force the modulator to treat the next modulation period (beginning with the next load of MBUFF/SBUFF) as a space period equal in length to the mark and space counts combined. Subsequent modulation periods will consist entirely of these extended space periods with no mark periods. Clearing EXSPC will return the modulator to standard operation at the beginning of the next modulation period. To calculate the length of an extended space in time mode, use the equation:

$$t_{\text{espace}} = \frac{((\text{SBUFF}_1) + (\text{MBUFF}_2 + 1 + \text{SBUFF}_2) + \dots (\text{MBUFF}_n + 1 + \text{SBUFF}_n)) \times 8}{f_{\text{osc}}} \text{ secs}$$

Where the subscripts 1, 2, ... n refer to the modulation periods that elapsed while the EXSPC bit was set.

Similarly, to calculate the length of an extended space in FSK mode, use the equation:

$$t_{\text{espace}} = \frac{((\text{SBUFF}_1) + (\text{MBUFF}_2 + 1 + \text{SBUFF}_2) + \dots (\text{MBUFF}_n + 1 + \text{SBUFF}_n))}{f_{\text{cg}}} \text{ secs}$$

Where f_{cg} is the frequency output from the carrier generator. For an example of extended space operation, see [Figure 9-6](#).

NOTE: The EXSPC feature can be used to emulate a zero mark event.

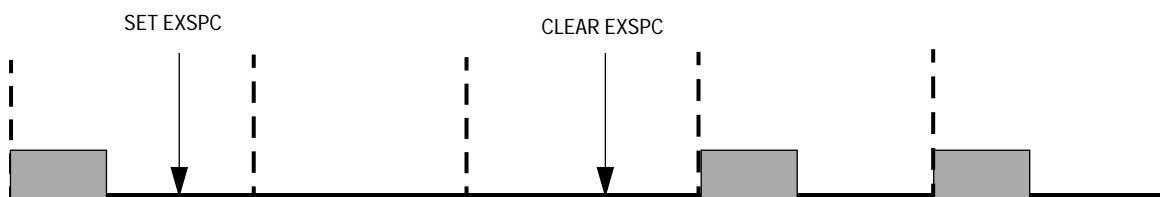


Figure 9-6. Extended Space Operation

9.5.3.1 End-of-Cycle (EOC) Interrupt

At the end of each cycle (when the counter is reloaded from MBUFF), the end-of-cycle (EOC) flag is set. If the interrupt enable bit was previously set, an interrupt will also be issued to the CPU. The EOC interrupt provides a means for the user to reload new mark/space values into the MBUFF and SBUFF registers. As the EOC interrupt is coincident with reloading the counter, MBUFF does not require additional buffering and may be updated with a new value for the next period from within the EOC interrupt service routine (ISR). To allow both mark and space period values to be updated from within the same ISR, SREG is buffered by SBUFF. The contents written to SBUFF are transferred to the active register SREG at the end of every cycle irrespective of the state of the EOC flag. The EOC flag is cleared by a read of the modulator control and status register (MCSR) followed by an access of MDR2 or MDR3. The EOC flag must be cleared within the ISR to prevent another interrupt being generated after exiting the ISR. If the EOC interrupt is not being used (IE = 0), the EOC flag need not be cleared.

Carrier Modulator Transmitter (CMT)

9.5.3.2 Modulator Control and Status Register

The modulator control and status register (MCSR) contains the modulator and carrier generator enable (MCGEN), interrupt enable (IE), mode select (MODE), baseband enable (BASE), extended space (EXSPC), and external interrupt mask (EIMSK) control bits, divide-by-two prescaler (DIV2) bit, and the end of cycle (EOC) status bit.

Address: \$0014

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	EOC							
Write:		DIV2	EIMSK	EXSPC	BASE	MODE	IE	MCGEN
Reset:	0	0	0	0	0	0	0	0


 = Unimplemented

Figure 9-7. Modulator Control and Status Register (MCSR)

EOC — End-Of-Cycle Status Flag

- 1 = End of modulator cycle (counter = SBUFF) has occurred
- 0 = Current modulation cycle in progress

EOC is set when a match occurs between the contents of the space period register, SREG, and the down counter. This is recognized as the end of the modulation cycle. At this time, the counter is initialized with the (possibly new) contents of the mark period buffer, MBUFF, and the space period register, SREG, is loaded with the (possibly new) contents of the space period buffer, SBUFF. This flag is cleared by a read of the MCSR followed by an access of MDR2 or MDR3. The EOC flag is cleared by reset.

DIV2 — Divide-by-two prescaler

- 1 = Divide-by-two prescaler enabled
- 0 = Divide-by-two prescaler disabled

The divide-by-two prescaler causes the CMT to be clocked at the bus rate when enabled; 2 x the bus rate when disabled (f_{osc}). This bit is not double buffered and so should not be set during a transmission.

EIMSK — External Interrupt Mask

1 = IRQ and keyscan interrupts masked

0 = IRQ and keyscan interrupts enabled

The external interrupt mask bit is used to mask IRQ and keyscan interrupts. This bit is cleared by reset.

EXSPC — Extended Space Enable

1 = Extended space enabled

0 = Extended space disabled

For a description of the extended space enable bit, see [9.5.3 Extended Space Operation](#). This bit is cleared by reset.

BASE — Baseband Enable

1 = Baseband enabled

0 = Baseband disabled

When set, the BASE bit disables the carrier generator and forces the carrier output high for generation of baseband protocols. When BASE is clear, the carrier generator is enabled and the carrier output toggles at the frequency determined by values stored in the carrier data registers. See [9.5.1 Time Mode](#). This bit is cleared by reset. This bit is not double buffered and should not be written to during a transmission.

MODE — Mode Select

1 = CMT operates in FSK mode.

0 = CMT operates in time mode.

For a description of CMT operation in time mode, see [9.5.1 Time Mode](#). For a description of CMT operation in FSK mode, see [9.5.2 FSK Mode](#). This bit is cleared by reset. This bit is not double buffered and should not be written to during a transmission.

IE — Interrupt Enable

1 = CPU interrupt enabled

0 = CPU interrupt disabled

A CPU interrupt will be requested when EOC is set if IE was previously set. If IE is clear, EOC will not request a CPU interrupt.

Carrier Modulator Transmitter (CMT)

MCGEN — Modulator and Carrier Generator Enable

1 = Modulator and carrier generator enabled

0 = Modulator and carrier generator disabled

Setting MCGEN will initialize the carrier generator and modulator and will enable all clocks. Once enabled, the carrier generator and modulator will function continuously. When MCGEN is cleared, the current modulator cycle will be allowed to expire before all carrier and modulator clocks are disabled (to save power) and the modulator output is forced low. The user should initialize all data and control registers before enabling the system to prevent spurious operation. This bit is cleared by reset.

9.5.4 Modulator Period Data Registers

The 12-bit MBUFF and SBUFF registers are accessed through three 8-bit registers, MDR1, MDR2, and MDR3. MDR2 and MDR3 contain the least significant eight bits of MBUFF and SBUFF respectively. MDR1 contains the two most significant nibbles of MBUFF and SBUFF. In many applications, periods greater than those obtained by eight bits will not be required. Splitting the registers up in this manner allows the user to clear MDR1 and generate 8-bit periods with just two data writes.

MDR1		Address: \$0015							
		Bit 7	6	5	4	3	2	1	Bit 0
Read:		MB11	MB10	MB9	MB8	SB11	SB10	SB9	SB8
Write:									
Reset:		Unaffected by Reset							

MDR2		Address: \$0016							
		Bit 7	6	5	4	3	2	1	Bit 0
Read:		MB7	MB6	MB5	MB4	MB3	MB2	MB1	MB0
Write:									
Reset:		Unaffected by Reset							

MDR3		Address: \$0017							
		Bit 7	6	5	4	3	2	1	Bit 0
Read:		SB7	SB6	SB5	SB4	SB3	SB2	SB1	SB0
Write:									
Reset:		Unaffected by Reset							

Figure 9-8. Modulator Data Registers (MDR1, MDR2, and MDR3)

Carrier Modulator Transmitter (CMT)

Freescale Semiconductor, Inc.

General Release Specification — MC68HC05RC17

Section 10. Phase-Locked Loop (PLL) Synthesizer

10.1 Contents

10.2	Introduction	87
10.3	Phase-Locked Loop Control Register	89
10.4	Operation During Stop Mode	91
10.5	Noise Immunity	91

10.2 Introduction

The phase-locked loop (PLL) consists of a variable bandwidth loop filter, a voltage controlled oscillator (VCO), a feedback frequency divider, and a digital phase detector. The PLL requires an external loop filter capacitor (typically 0.1 μ F) connected between XFC and V_{DDSYN} . This capacitor should be located as close to the chip as possible to minimize noise. V_{DDSYN} is the supply source for the PLL and should be bypassed to minimize noise. The V_{DDSYN} bypass cap should be as close as possible to the chip. V_{DDSYN} should be at the same potential as V_{DD} .

The phase detector compares the frequency and phase of the feedback frequency (t_{FB}) and the crystal oscillator reference frequency (t_{REF}) and generates the output, PCOMP, as shown in **Figure 10-1**. The output waveform is then integrated and amplified. The resultant dc voltage is applied to the voltage controlled oscillator. The output of the VCO is divided by a variable frequency divider of 128, 64, 32, or 16 to provide the feedback frequency for the phase detector.

Phase-Locked Loop (PLL) Synthesizer

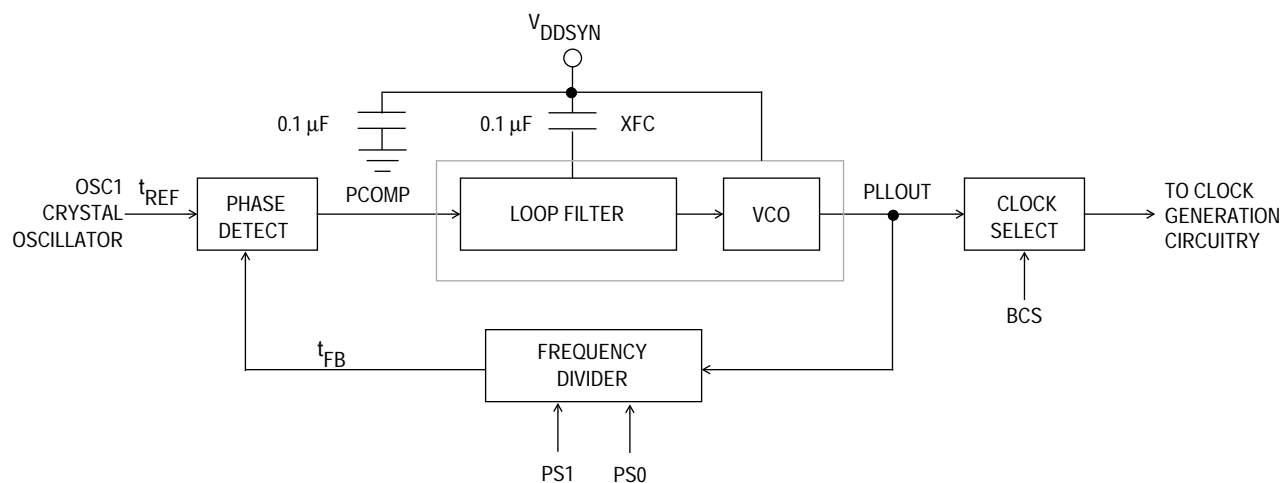


Figure 10-1. PLL Circuit

To change PLL frequencies, follow this 6-step procedure:

1. Clear BCS to enable the low frequency bus rate
2. Clear PLLON to disable the PLL and select manual high bandwidth
3. Select the speed using PS1 and PS0
4. Set PLLON to enable the PLL
5. Wait a time of 90% t_{PLLs} for the PLL frequency to stabilize and select manual low bandwidth, wait another 10% t_{PLLs}

NOTE: Typically, t_{PLLs} equals 10 ms.

6. Set BCS to switch to the high-frequency bus rate

The user cannot switch among the high speeds with the BCS bit set. Following the procedure above will prevent possible bursts of high frequency operation during the re-configuration of the PLL.

Whenever the PLL is first enabled, the wide bandwidth mode is used. This enables the PLL frequency to ramp up quickly. When the output frequency is near the desired frequency, the filter is switched to the narrow bandwidth mode to make the final frequency more stable.

10.3 Phase-Locked Loop Control Register

This read/write register contains the control bits that select the PLL frequency and enable/disable the synthesizer.

Address: \$0007

	Bit 7	6	5	4	3	2	1	Bit 0
Read:	0	BCS	0	BWC	PLLON	VCOTST	PS1	PS0
Write:								
Reset:	0	0	0	0	1	1	0	1

Figure 10-2. Phase-Locked Loop Control Register (PLLCR)

BCS — Bus Clock Select

When this bit is set, the output of the PLL is used to generate the internal processor clock. When clear, the internal bus clock is driven by the crystal (OSC1÷2). Once BCS has been changed, it may take up to 1.5 OSC1 cycles + 1.5 PLLOUT cycles to make the transition. During the transition, the clock select output will be held low and all CPU and timer activity will cease until the transition is complete. Before setting BCS, allow at least a time of t_{PLLS} after PLLON is set. This bit should not be set unless the PLLON bit is already set on a previous instruction. Reset clears this bit.

BWC — Bandwidth Control

This bit selects high bandwidth control when set and low bandwidth control when clear. The low bandwidth driver is always enabled, so this bit determines whether the high bandwidth driver is on or off. When the PLL is turned on, the BWC bit should be set to 1 for a time $90\% t_{PLLS}$ to allow the PLL time to acquire a frequency close to the desired frequency. The BWC bit should then be cleared and software should delay for a time, $10\% t_{PLLS}$, to allow the PLL time to make the final adjustments. The PLL clock cannot be used (BCS bit set). Although it is NOT prohibited in hardware, the BCS bit should not be set unless the BWC bit is cleared and the proper delay times have been followed. The PLL will generate a lower jitter clock when the BWC bit is cleared. Reset clears this bit.

Phase-Locked Loop (PLL) Synthesizer

PLLON — PLL On

This bit activates the synthesizer circuit without connecting it to the control circuit. This allows the synthesizer to stabilize before it can drive the CPU clocks. When this bit is cleared, the PLL is shut off and the BCS bit cannot be set. (Setting the BCS bit would engage the disabled PLL onto the bus). Reset sets this bit.

NOTE: For minimum current consumption, disable the PLL module before entering wait mode.

NOTE: The PLLON bit should not be cleared unless the BCS bit has been cleared on a previous write to the register.

VCOTST — VCO Test

NOTE: This bit is intended for use by Freescale. This bit cannot be cleared in user mode.

PS1 and PS0 — PLL Synthesizer Speed Select

These two bits select one of four taps from the PLL to drive the CPU clocks. These bits are used in conjunction with PLLON and BCS bits in the PLL control register. Reset clears PS1 and sets PS0, choosing a bus clock frequency of 524 kHz using an external crystal of 32.768 kHz.

CAUTION: This bit should not be modified if BCS and PLLON in the PLLCR are both at a logic high.

**Table 10-1. PS1 and PS0 Speed Selects
with 32.768-kHz Crystal**

PS1	PS0	CPU Bus Clock Frequency (f_{OP})	
0	0	524 kHz	
0	1	1.049 MHz	Reset Condition
1	0	2.097 MHz	For $3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$
1	1	4.194 MHz	Do Not Select

NOTE: For the MC68HC05RC17, the 4.194-MHz bus clock frequency should **not** be selected. The 2.097-MHz bus clock frequency should not be selected when running the part below $V_{DD} = 3.0$ V.

10.4 Operation During Stop Mode

The PLL is switched to low-frequency bus rate and is turned off temporarily when STOP is executed. Coming out of stop mode with an external IRQ, the PLL is turned on with the same configuration it had before going into STOP with the exception of BCS which is reset. Otherwise, the PLL control register is in the reset condition.

10.5 Noise Immunity

The MCU should be insulated as much as possible from noise in the system. These steps are recommend to help prevent problems due to noise injection.

1. The application environment should be designed so that the MCU is not near signal traces which switch often, such as a clock signal.
2. The oscillator circuit for the MCU should be placed as close as possible to the OSC1 and OSC2 pins on the MCU.
3. To minimize noise, all power pins should be filtered by using bypass capacitors placed as close as possible to the MCU.

See the application note *Designing for Electromagnetic Compatibility (EMC) with HCMOS Microcontrollers*, available through the Freescale Literature Distribution Center, document number AN1050/D.

General Release Specification — MC68HC05RC17

Section 11. Instruction Set

11.1 Contents

11.2	Introduction	94
11.3	Addressing Modes	94
11.3.1	Inherent	95
11.3.2	Immediate	95
11.3.3	Direct	95
11.3.4	Extended	95
11.3.5	Indexed, No Offset	96
11.3.6	Indexed, 8-Bit Offset	96
11.3.7	Indexed, 16-Bit Offset	96
11.3.8	Relative	97
11.4	Instruction Types	97
11.4.1	Register/Memory Instructions	98
11.4.2	Read-Modify-Write Instructions	99
11.4.3	Jump/Branch Instructions	100
11.4.4	Bit Manipulation Instructions	102
11.4.5	Control Instructions	103
11.5	Instruction Set Summary	104

11.2 Introduction

The MCU instruction set has 62 instructions and uses eight addressing modes. The instructions include all those of the M146805 CMOS Family plus one more: the unsigned multiply (MUL) instruction. The MUL instruction allows unsigned multiplication of the contents of the accumulator (A) and the index register (X). The high-order product is stored in the index register, and the low-order product is stored in the accumulator.

11.3 Addressing Modes

The CPU uses eight addressing modes for flexibility in accessing data. The addressing modes provide eight different ways for the CPU to find the data required to execute an instruction. The eight addressing modes are:

- Inherent
- Immediate
- Direct
- Extended
- Indexed, no offset
- Indexed, 8-bit offset
- Indexed, 16-bit offset
- Relative

11.3.1 Inherent

Inherent instructions are those that have no operand, such as return from interrupt (RTI) and stop (STOP). Some of the inherent instructions act on data in the CPU registers, such as set carry flag (SEC) and increment accumulator (INCA). Inherent instructions require no operand address and are one byte long.

11.3.2 Immediate

Immediate instructions are those that contain a value to be used in an operation with the value in the accumulator or index register. Immediate instructions require no operand address and are two bytes long. The opcode is the first byte, and the immediate data value is the second byte.

11.3.3 Direct

Direct instructions can access any of the first 256 memory locations with two bytes. The first byte is the opcode, and the second is the low byte of the operand address. In direct addressing, the CPU automatically uses \$00 as the high byte of the operand address.

11.3.4 Extended

Extended instructions use three bytes and can access any address in memory. The first byte is the opcode; the second and third bytes are the high and low bytes of the operand address.

When using the Freescale assembler, the programmer does not need to specify whether an instruction is direct or extended. The assembler automatically selects the shortest form of the instruction.

11.3.5 Indexed, No Offset

Indexed instructions with no offset are 1-byte instructions that can access data with variable addresses within the first 256 memory locations. The index register contains the low byte of the effective address of the operand. The CPU automatically uses \$00 as the high byte, so these instructions can address locations \$0000–\$00FF.

Indexed, no offset instructions are often used to move a pointer through a table or to hold the address of a frequently used RAM or I/O location.

11.3.6 Indexed, 8-Bit Offset

Indexed, 8-bit offset instructions are 2-byte instructions that can access data with variable addresses within the first 511 memory locations. The CPU adds the unsigned byte in the index register to the unsigned byte following the opcode. The sum is the effective address of the operand. These instructions can access locations \$0000–\$01FE.

Indexed 8-bit offset instructions are useful for selecting the kth element in an n-element table. The table can begin anywhere within the first 256 memory locations and could extend as far as location 510 (\$01FE). The k value is typically in the index register, and the address of the beginning of the table is in the byte following the opcode.

11.3.7 Indexed, 16-Bit Offset

Indexed, 16-bit offset instructions are 3-byte instructions that can access data with variable addresses at any location in memory. The CPU adds the unsigned byte in the index register to the two unsigned bytes following the opcode. The sum is the effective address of the operand. The first byte after the opcode is the high byte of the 16-bit offset; the second byte is the low byte of the offset.

Indexed, 16-bit offset instructions are useful for selecting the kth element in an n-element table anywhere in memory.

As with direct and extended addressing, the Freescale assembler determines the shortest form of indexed addressing.

11.3.8 Relative

Relative addressing is only for branch instructions. If the branch condition is true, the CPU finds the effective branch destination by adding the signed byte following the opcode to the contents of the program counter. If the branch condition is not true, the CPU goes to the next instruction. The offset is a signed, two's complement byte that gives a branching range of –128 to +127 bytes from the address of the next location after the branch instruction.

When using the Freescale assembler, the programmer does not need to calculate the offset, because the assembler determines the proper offset and verifies that it is within the span of the branch.

11.4 Instruction Types

The MCU instructions fall into the following five categories:

- Register/Memory Instructions
- Read-Modify-Write Instructions
- Jump/Branch Instructions
- Bit Manipulation Instructions
- Control Instructions

11.4.1 Register/Memory Instructions

These instructions operate on CPU registers and memory locations. Most of them use two operands. One operand is in either the accumulator or the index register. The CPU finds the other operand in memory.

Table 11-1. Register/Memory Instructions

Instruction	Mnemonic
Add Memory Byte and Carry Bit to Accumulator	ADC
Add Memory Byte to Accumulator	ADD
AND Memory Byte with Accumulator	AND
Bit Test Accumulator	BIT
Compare Accumulator	CMP
Compare Index Register with Memory Byte	CPX
EXCLUSIVE OR Accumulator with Memory Byte	EOR
Load Accumulator with Memory Byte	LDA
Load Index Register with Memory Byte	LDX
Multiply	MUL
OR Accumulator with Memory Byte	ORA
Subtract Memory Byte and Carry Bit from Accumulator	SBC
Store Accumulator in Memory	STA
Store Index Register in Memory	STX
Subtract Memory Byte from Accumulator	SUB

11.4.2 Read-Modify-Write Instructions

These instructions read a memory location or a register, modify its contents, and write the modified value back to the memory location or to the register.

NOTE: Do not use read-modify-write operations on write-only registers.

Table 11-2. Read-Modify-Write Instructions

Instruction	Mnemonic
Arithmetic Shift Left (Same as LSL)	ASL
Arithmetic Shift Right	ASR
Bit Clear	BCLR ⁽¹⁾
Bit Set	BSET ⁽¹⁾
Clear Register	CLR
Complement (One's Complement)	COM
Decrement	DEC
Increment	INC
Logical Shift Left (Same as ASL)	LSL
Logical Shift Right	LSR
Negate (Two's Complement)	NEG
Rotate Left through Carry Bit	ROL
Rotate Right through Carry Bit	ROR
Test for Negative or Zero	TST ⁽²⁾

1. Unlike other read-modify-write instructions, BCLR and BSET use only direct addressing.
2. TST is an exception to the read-modify-write sequence because it does not write a replacement value.

11.4.3 Jump/Branch Instructions

Jump instructions allow the CPU to interrupt the normal sequence of the program counter. The unconditional jump instruction (JMP) and the jump-to-subroutine instruction (JSR) have no register operand. Branch instructions allow the CPU to interrupt the normal sequence of the program counter when a test condition is met. If the test condition is not met, the branch is not performed.

The BRCLR and BRSET instructions cause a branch based on the state of any readable bit in the first 256 memory locations. These 3-byte instructions use a combination of direct addressing and relative addressing. The direct address of the byte to be tested is in the byte following the opcode. The third byte is the signed offset byte. The CPU finds the effective branch destination by adding the third byte to the program counter if the specified bit tests true. The bit to be tested and its condition (set or clear) is part of the opcode. The span of branching is from -128 to $+127$ from the address of the next location after the branch instruction. The CPU also transfers the tested bit to the carry/borrow bit of the condition code register.

Table 11-3. Jump and Branch Instructions

Instruction	Mnemonic
Branch if Carry Bit Clear	BCC
Branch if Carry Bit Set	BCS
Branch if Equal	BEQ
Branch if Half-Carry Bit Clear	BHCC
Branch if Half-Carry Bit Set	BHCS
Branch if Higher	BHI
Branch if Higher or Same	BHS
Branch if $\overline{\text{IRQ}}$ Pin High	BIH
Branch if $\overline{\text{IRQ}}$ Pin Low	BIL
Branch if Lower	BLO
Branch if Lower or Same	BLS
Branch if Interrupt Mask Clear	BMC
Branch if Minus	BMI
Branch if Interrupt Mask Set	BMS
Branch if Not Equal	BNE
Branch if Plus	BPL
Branch Always	BRA
Branch if Bit Clear	BRCLR
Branch Never	BRN
Branch if Bit Set	BRSET
Branch to Subroutine	BSR
Unconditional Jump	JMP
Jump to Subroutine	JSR

11.4.4 Bit Manipulation Instructions

The CPU can set or clear any writable bit in the first 256 bytes of memory, which includes I/O registers and on-chip RAM locations. The CPU can also test and branch based on the state of any bit in any of the first 256 memory locations.

Table 11-4. Bit Manipulation Instructions

Instruction	Mnemonic
Bit Clear	BCLR
Branch if Bit Clear	BRCLR
Branch if Bit Set	BRSET
Bit Set	BSET

11.4.5 Control Instructions

These instructions act on CPU registers and control CPU operation during program execution.

Table 11-5. Control Instructions

Instruction	Mnemonic
Clear Carry Bit	CLC
Clear Interrupt Mask	CLI
No Operation	NOP
Reset Stack Pointer	RSP
Return from Interrupt	RTI
Return from Subroutine	RTS
Set Carry Bit	SEC
Set Interrupt Mask	SEI
Stop Oscillator and Enable $\overline{\text{IRQ}}$ Pin	STOP
Software Interrupt	SWI
Transfer Accumulator to Index Register	TAX
Transfer Index Register to Accumulator	TXA
Stop CPU Clock and Enable Interrupts	WAIT

11.5 Instruction Set Summary

Table 11-6. Instruction Set Summary



Source Form	Operation	Description	Effect on CCR					Address Mode	Opcode	Operand	Cycles
			H	I	N	Z	C				
ADC #opr ADC opr ADC opr ADC opr,X ADC opr,X ADC ,X	Add with Carry	$A \leftarrow (A) + (M) + (C)$	↑	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX	A9 B9 C9 D9 E9 F9	ii dd hh ll ee ff ff	2 3 4 5 4 3
ADD #opr ADD opr ADD opr ADD opr,X ADD opr,X ADD ,X	Add without Carry	$A \leftarrow (A) + (M)$	↑	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX	AB BB CB DB EB FB	ii dd hh ll ee ff ff	2 3 4 5 4 3
AND #opr AND opr AND opr AND opr,X AND opr,X AND ,X	Logical AND	$A \leftarrow (A) \wedge (M)$	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX	A4 B4 C4 D4 E4 F4	ii dd hh ll ee ff ff	2 3 4 5 4 3
ASL opr ASLA ASLX ASL opr,X ASL ,X	Arithmetic Shift Left (Same as LSL)		—	—	↑	↑	↑	DIR INH INH IX1 IX	38 48 58 68 78	dd ff	5 3 3 6 5
ASR opr ASRA ASRX ASR opr,X ASR ,X	Arithmetic Shift Right		—	—	↑	↑	↑	DIR INH INH IX1 IX	37 47 57 67 77	dd ff	5 3 3 6 5
BCC rel	Branch if Carry Bit Clear	$PC \leftarrow (PC) + 2 + rel ? C = 0$	—	—	—	—	—	REL	24	rr	3
BCLR n opr	Clear Bit n	$Mn \leftarrow 0$	—	—	—	—	—	DIR (b0) DIR (b1) DIR (b2) DIR (b3) DIR (b4) DIR (b5) DIR (b6) DIR (b7)	11 13 15 17 19 1B 1D 1F	dd dd dd dd dd dd dd dd	5 5 5 5 5 5 5 5
BCS rel	Branch if Carry Bit Set (Same as BLO)	$PC \leftarrow (PC) + 2 + rel ? C = 1$	—	—	—	—	—	REL	25	rr	3
BEQ rel	Branch if Equal	$PC \leftarrow (PC) + 2 + rel ? Z = 1$	—	—	—	—	—	REL	27	rr	3
BHCC rel	Branch if Half-Carry Bit Clear	$PC \leftarrow (PC) + 2 + rel ? H = 0$	—	—	—	—	—	REL	28	rr	3
BHCS rel	Branch if Half-Carry Bit Set	$PC \leftarrow (PC) + 2 + rel ? H = 1$	—	—	—	—	—	REL	29	rr	3
BHI rel	Branch if Higher	$PC \leftarrow (PC) + 2 + rel ? C \vee Z = 0$	—	—	—	—	—	REL	22	rr	3
BHS rel	Branch if Higher or Same	$PC \leftarrow (PC) + 2 + rel ? C = 0$	—	—	—	—	—	REL	24	rr	3

Table 11-6. Instruction Set Summary (Continued)

Source Form	Operation	Description	Effect on CCR					Address Mode	Opcode	Operand	Cycles
			H	I	N	Z	C				
BIH <i>rel</i>	Branch if IRQ Pin High	$PC \leftarrow (PC) + 2 + rel ? IRQ = 1$	—	—	—	—	—	REL	2F	rr	3
BIL <i>rel</i>	Branch if IRQ Pin Low	$PC \leftarrow (PC) + 2 + rel ? IRQ = 0$	—	—	—	—	—	REL	2E	rr	3
BIT # <i>opr</i> BIT <i>opr</i> BIT <i>opr</i> BIT <i>opr</i> ,X BIT <i>opr</i> ,X BIT ,X	Bit Test Accumulator with Memory Byte	$(A) \wedge (M)$	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX	A5 B5 C5 D5 E5 F5	ii dd hh ll ee ff ff	2 3 4 5 4 3
BLO <i>rel</i>	Branch if Lower (Same as BCS)	$PC \leftarrow (PC) + 2 + rel ? C = 1$	—	—	—	—	—	REL	25	rr	3
BLS <i>rel</i>	Branch if Lower or Same	$PC \leftarrow (PC) + 2 + rel ? C \vee Z = 1$	—	—	—	—	—	REL	23	rr	3
BMC <i>rel</i>	Branch if Interrupt Mask Clear	$PC \leftarrow (PC) + 2 + rel ? I = 0$	—	—	—	—	—	REL	2C	rr	3
BMI <i>rel</i>	Branch if Minus	$PC \leftarrow (PC) + 2 + rel ? N = 1$	—	—	—	—	—	REL	2B	rr	3
BMS <i>rel</i>	Branch if Interrupt Mask Set	$PC \leftarrow (PC) + 2 + rel ? I = 1$	—	—	—	—	—	REL	2D	rr	3
BNE <i>rel</i>	Branch if Not Equal	$PC \leftarrow (PC) + 2 + rel ? Z = 0$	—	—	—	—	—	REL	26	rr	3
BPL <i>rel</i>	Branch if Plus	$PC \leftarrow (PC) + 2 + rel ? N = 0$	—	—	—	—	—	REL	2A	rr	3
BRA <i>rel</i>	Branch Always	$PC \leftarrow (PC) + 2 + rel ? 1 = 1$	—	—	—	—	—	REL	20	rr	3
BRCLR <i>n opr rel</i>	Branch if Bit <i>n</i> Clear	$PC \leftarrow (PC) + 2 + rel ? Mn = 0$	—	—	—	—	↑	DIR (b0)	01	dd rr	5
								DIR (b1)	03	dd rr	5
								DIR (b2)	05	dd rr	5
								DIR (b3)	07	dd rr	5
								DIR (b4)	09	dd rr	5
								DIR (b5)	0B	dd rr	5
								DIR (b6)	0D	dd rr	5
BRSET <i>n opr rel</i>	Branch if Bit <i>n</i> Set	$PC \leftarrow (PC) + 2 + rel ? Mn = 1$	—	—	—	—	↑	DIR (b7)	0F	dd rr	5
								DIR (b0)	00	dd rr	5
								DIR (b1)	02	dd rr	5
								DIR (b2)	04	dd rr	5
								DIR (b3)	06	dd rr	5
								DIR (b4)	08	dd rr	5
								DIR (b5)	0A	dd rr	5
BSET <i>n opr</i>	Set Bit <i>n</i>	$Mn \leftarrow 1$	—	—	—	—	—	DIR (b6)	0C	dd rr	5
								DIR (b7)	0E	dd rr	5
								DIR (b0)	10	dd	5
								DIR (b1)	12	dd	5
								DIR (b2)	14	dd	5
								DIR (b3)	16	dd	5
								DIR (b4)	18	dd	5
BSR <i>rel</i>	Branch to Subroutine	$PC \leftarrow (PC) + 2$; push (PCL) $SP \leftarrow (SP) - 1$; push (PCH) $SP \leftarrow (SP) - 1$ $PC \leftarrow (PC) + rel$	—	—	—	—	—	DIR (b5)	1A	dd	5
								DIR (b6)	1C	dd	5
								DIR (b7)	1E	dd	5
								REL	AD	rr	6
CLC	Clear Carry Bit	$C \leftarrow 0$	—	—	—	—	0	INH	98		2
CLI	Clear Interrupt Mask	$I \leftarrow 0$	—	0	—	—	—	INH	9A		2

Table 11-6. Instruction Set Summary (Continued)

Source Form	Operation	Description	Effect on CCR					Address Mode	Opcode	Operand	Cycles
			H	I	N	Z	C				
CLR <i>opr</i> CLRA CLR X CLR <i>opr</i> ,X CLR ,X	Clear Byte	$M \leftarrow \$00$ $A \leftarrow \$00$ $X \leftarrow \$00$ $M \leftarrow \$00$ $M \leftarrow \$00$	—	—	0	1	—	DIR INH INH IX1 IX	3F 4F 5F 6F 7F	dd ff	5 3 3 6 5
CMP # <i>opr</i> CMP <i>opr</i> CMP <i>opr</i> CMP <i>opr</i> ,X CMP <i>opr</i> ,X CMP ,X	Compare Accumulator with Memory Byte	(A) – (M)	—	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX	A1 B1 C1 D1 E1 F1	ii dd hh ll ee ff ff	2 3 4 5 4 3
COM <i>opr</i> COMA COMX COM <i>opr</i> ,X COM ,X	Complement Byte (One's Complement)	$M \leftarrow (\overline{M}) = \$FF - (M)$ $A \leftarrow (\overline{A}) = \$FF - (A)$ $X \leftarrow (\overline{X}) = \$FF - (X)$ $M \leftarrow (\overline{M}) = \$FF - (M)$ $M \leftarrow (\overline{M}) = \$FF - (M)$	—	—	↑	↑	1	DIR INH INH IX1 IX	33 43 53 63 73	dd ff	5 3 3 6 5
CPX # <i>opr</i> CPX <i>opr</i> CPX <i>opr</i> CPX <i>opr</i> ,X CPX <i>opr</i> ,X CPX ,X	Compare Index Register with Memory Byte	(X) – (M)	—	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX	A3 B3 C3 D3 E3 F3	ii dd hh ll ee ff ff	2 3 4 5 4 3
DEC <i>opr</i> DECA DECX DEC <i>opr</i> ,X DEC ,X	Decrement Byte	$M \leftarrow (M) - 1$ $A \leftarrow (A) - 1$ $X \leftarrow (X) - 1$ $M \leftarrow (M) - 1$ $M \leftarrow (M) - 1$	—	—	↑	↑	—	DIR INH INH IX1 IX	3A 4A 5A 6A 7A	dd ff	5 3 3 6 5
EOR # <i>opr</i> EOR <i>opr</i> EOR <i>opr</i> EOR <i>opr</i> ,X EOR <i>opr</i> ,X EOR ,X	EXCLUSIVE OR Accumulator with Memory Byte	$A \leftarrow (A) \oplus (M)$	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX	A8 B8 C8 D8 E8 F8	ii dd hh ll ee ff ff	2 3 4 5 4 3
INC <i>opr</i> INCA INCX INC <i>opr</i> ,X INC ,X	Increment Byte	$M \leftarrow (M) + 1$ $A \leftarrow (A) + 1$ $X \leftarrow (X) + 1$ $M \leftarrow (M) + 1$ $M \leftarrow (M) + 1$	—	—	↑	↑	—	DIR INH INH IX1 IX	3C 4C 5C 6C 7C	dd ff	5 3 3 6 5
JMP <i>opr</i> JMP <i>opr</i> JMP <i>opr</i> ,X JMP <i>opr</i> ,X JMP ,X	Unconditional Jump	PC ← Jump Address	—	—	—	—	—	DIR EXT IX2 IX1 IX	BC CC DC EC FC	dd hh ll ee ff ff	2 3 4 3 2

Table 11-6. Instruction Set Summary (Continued)




Source Form	Operation	Description	Effect on CCR					Address Mode	Opcode	Operand	Cycles
			H	I	N	Z	C				
JSR <i>opr</i> JSR <i>opr</i> JSR <i>opr</i> ,X JSR <i>opr</i> ,X JSR ,X	Jump to Subroutine	PC ← (PC) + n (n = 1, 2, or 3) Push (PCL); SP ← (SP) – 1 Push (PCH); SP ← (SP) – 1 PC ← Effective Address	—	—	—	—	—	DIR EXT IX2 IX1 IX	BD CD DD ED FD	dd hh ll ee ff ff	5 6 7 6 5
LDA # <i>opr</i> LDA <i>opr</i> LDA <i>opr</i> LDA <i>opr</i> ,X LDA <i>opr</i> ,X LDA ,X	Load Accumulator with Memory Byte	A ← (M)	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX	A6 B6 C6 D6 E6 F6	ii dd hh ll ee ff ff	2 3 4 5 4 3
LDX # <i>opr</i> LDX <i>opr</i> LDX <i>opr</i> LDX <i>opr</i> ,X LDX <i>opr</i> ,X LDX ,X	Load Index Register with Memory Byte	X ← (M)	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX	AE BE CE DE EE FE	ii dd hh ll ee ff ff	2 3 4 5 4 3
LSL <i>opr</i> LSLA LSLX LSL <i>opr</i> ,X LSL ,X	Logical Shift Left (Same as ASL)		—	—	↑	↑	↑	DIR INH INH IX1 IX	38 48 58 68 78	dd ff	5 3 3 6 5
LSR <i>opr</i> LSRA LSRX LSR <i>opr</i> ,X LSR ,X	Logical Shift Right		—	—	0	↑	↑	DIR INH INH IX1 IX	34 44 54 64 74	dd ff	5 3 3 6 5
MUL	Unsigned Multiply	X : A ← (X) × (A)	0	—	—	—	0	INH	42		11
NEG <i>opr</i> NEGA NEGX NEG <i>opr</i> ,X NEG ,X	Negate Byte (Two's Complement)	M ← -(M) = \$00 - (M) A ← -(A) = \$00 - (A) X ← -(X) = \$00 - (X) M ← -(M) = \$00 - (M) M ← -(M) = \$00 - (M)	—	—	↑	↑	↑	DIR INH INH IX1 IX	30 40 50 60 70	dd ff	5 3 3 6 5
NOP	No Operation		—	—	—	—	—	INH	9D		2
ORA # <i>opr</i> ORA <i>opr</i> ORA <i>opr</i> ORA <i>opr</i> ,X ORA <i>opr</i> ,X ORA ,X	Logical OR Accumulator with Memory	A ← (A) ∨ (M)	—	—	↑	↑	—	IMM DIR EXT IX2 IX1 IX	AA BA CA DA EA FA	ii dd hh ll ee ff ff	2 3 4 5 4 3
ROL <i>opr</i> ROLA ROLX ROL <i>opr</i> ,X ROL ,X	Rotate Byte Left through Carry Bit		—	—	↑	↑	↑	DIR INH INH IX1 IX	39 49 59 69 79	dd ff	5 3 3 6 5

Table 11-6. Instruction Set Summary (Continued)


Source Form	Operation	Description	Effect on CCR					Address Mode	Opcode	Operand	Cycles
			H	I	N	Z	C				
ROR <i>opr</i> RORA RORX ROR <i>opr</i> ,X ROR ,X	Rotate Byte Right through Carry Bit		—	—	↑	↑	↑	DIR INH INH IX1 IX	36 46 56 66 76	dd ff	5 3 3 6 5
RSP	Reset Stack Pointer	$SP \leftarrow \$00FF$	—	—	—	—	—	INH	9C		2
RTI	Return from Interrupt	$SP \leftarrow (SP) + 1$; Pull (CCR) $SP \leftarrow (SP) + 1$; Pull (A) $SP \leftarrow (SP) + 1$; Pull (X) $SP \leftarrow (SP) + 1$; Pull (PCH) $SP \leftarrow (SP) + 1$; Pull (PCL)	↑	↑	↑	↑	↑	INH	80		9
RTS	Return from Subroutine	$SP \leftarrow (SP) + 1$; Pull (PCH) $SP \leftarrow (SP) + 1$; Pull (PCL)	—	—	—	—	—	INH	81		6
SBC # <i>opr</i> SBC <i>opr</i> SBC <i>opr</i> SBC <i>opr</i> ,X SBC <i>opr</i> ,X SBC ,X	Subtract Memory Byte and Carry Bit from Accumulator	$A \leftarrow (A) - (M) - (C)$	—	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX	A2 B2 C2 D2 E2 F2	ii dd hh ll ee ff ff	2 3 4 5 4 3
SEC	Set Carry Bit	$C \leftarrow 1$	—	—	—	—	1	INH	99		2
SEI	Set Interrupt Mask	$I \leftarrow 1$	—	1	—	—	—	INH	9B		2
STA <i>opr</i> STA <i>opr</i> STA <i>opr</i> ,X STA <i>opr</i> ,X STA ,X	Store Accumulator in Memory	$M \leftarrow (A)$	—	—	↑	↑	—	DIR EXT IX2 IX1 IX	B7 C7 D7 E7 F7	dd hh ll ee ff ff	4 5 6 5 4
STOP	Stop Oscillator and Enable IRQ Pin		—	0	—	—	—	INH	8E		2
STX <i>opr</i> STX <i>opr</i> STX <i>opr</i> ,X STX <i>opr</i> ,X STX ,X	Store Index Register In Memory	$M \leftarrow (X)$	—	—	↑	↑	—	DIR EXT IX2 IX1 IX	BF CF DF EF FF	dd hh ll ee ff ff	4 5 6 5 4
SUB # <i>opr</i> SUB <i>opr</i> SUB <i>opr</i> SUB <i>opr</i> ,X SUB <i>opr</i> ,X SUB ,X	Subtract Memory Byte from Accumulator	$A \leftarrow (A) - (M)$	—	—	↑	↑	↑	IMM DIR EXT IX2 IX1 IX	A0 B0 C0 D0 E0 F0	ii dd hh ll ee ff ff	2 3 4 5 4 3
SWI	Software Interrupt	$PC \leftarrow (PC) + 1$; Push (PCL) $SP \leftarrow (SP) - 1$; Push (PCH) $SP \leftarrow (SP) - 1$; Push (X) $SP \leftarrow (SP) - 1$; Push (A) $SP \leftarrow (SP) - 1$; Push (CCR) $SP \leftarrow (SP) - 1$; $I \leftarrow 1$ PCH \leftarrow Interrupt Vector High Byte PCL \leftarrow Interrupt Vector Low Byte	—	1	—	—	—	INH	83		10
TAX	Transfer Accumulator to Index Register	$X \leftarrow (A)$	—	—	—	—	—	INH	97		2

Table 11-6. Instruction Set Summary (Continued)

Source Form	Operation	Description	Effect on CCR					Address Mode	Opcode	Operand	Cycles
			H	I	N	Z	C				
TST <i>opr</i> TSTA TSTX TST <i>opr</i> ,X TST ,X	Test Memory Byte for Negative or Zero	(M) – \$00	—	—	↑	↑	—	DIR INH INH IX1 IX	3D 4D 5D 6D 7D	dd ff	4 3 3 5 4
TXA	Transfer Index Register to Accumulator	A ← (X)	—	—	—	—	—	INH	9F		2
WAIT	Stop CPU Clock and Enable Interrupts		—	0	—	—	—	INH	8F		2

A	Accumulator	<i>opr</i>	Operand (one or two bytes)
C	Carry/borrow ag	PC	Program counter
CCR	Condition code register	PCH	Program counter high byte
dd	Direct address of operand	PCL	Program counter low byte
dd rr	Direct address of operand and relative offset of branch instruction	REL	Relative addressing mode
DIR	Direct addressing mode	<i>rel</i>	Relative program counter offset byte
ee ff	High and low bytes of offset in indexed, 16-bit offset addressing	rr	Relative program counter offset byte
EXT	Extended addressing mode	SP	Stack pointer
ff	Offset byte in indexed, 8-bit offset addressing	X	Index register
H	Half-carry ag	Z	Zero ag
hh ll	High and low bytes of operand address in extended addressing	#	Immediate value
I	Interrupt mask	^	Logical AND
ii	Immediate operand byte	∨	Logical OR
IMM	Immediate addressing mode	⊕	Logical EXCLUSIVE OR
INH	Inherent addressing mode	()	Contents of
IX	Indexed, no offset addressing mode	-()	Negation (two's complement)
IX1	Indexed, 8-bit offset addressing mode	←	Loaded with
IX2	Indexed, 16-bit offset addressing mode	?	If
M	Memory location	:	Concatenated with
N	Negative ag	↑	Set or cleared
n	Any bit	—	Not affected

Instruction Set

Table 11-7. Opcode Map

Bit Manipulation			Branch		Read-Modify-Write					Control			Register/Memory						
DIR	DIR	REL	DIR	REL	DIR	INH	INH	IX1	IX	INH	INH	IMM	DIR	EXT	IX2	IX1	IX		
MSB	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	MSB		
LSB																	LSB		
0	BRSET0 DIR2 5	BSET0 DIR2 5	BRA REL2 3	NEG DIR1 5	NEGA INH1 3	NEGX INH2 3	NEG IX1 6	NEG IX1 6	RTI IX1 9			SUB 2 IMM2	SUB DIR3 3	SUB EXT3 4	SUB IX22 5	SUB IX11 4	SUB IX 3		
1	BRCLR0 DIR2 5	BCLR0 DIR2 5	BRN REL 3						RTS 1 INH			CMP 2 IMM2	CMP DIR3 3	CMP EXT3 4	CMP IX22 5	CMP IX11 4	CMP IX 3		
2	BRSET1 DIR2 5	BSET1 DIR2 5	BHI REL 3		MUL 1 INH							SBC 2 IMM2	SBC DIR3 3	SBC EXT3 4	SBC IX22 5	SBC IX11 4	SBC IX 3		
3	BRCLR1 DIR2 5	BCLR1 DIR2 5	BLS REL2 3	COM DIR1 5	COMA INH1 3	COMX INH2 3	COM IX1 6	COM IX1 6	SWI IX1 10			CPX 2 IMM2	CPX DIR3 3	CPX EXT3 4	CPX IX22 5	CPX IX11 4	CPX IX 3		
4	BRSET2 DIR2 5	BSET2 DIR2 5	BCC REL2 3	LSR DIR1 5	LSRA INH1 3	LSRX INH2 3	LSR IX1 6	LSR IX1 6				AND 2 IMM2	AND DIR3 3	AND EXT3 4	AND IX22 5	AND IX11 4	AND IX 3		
5	BRCLR2 DIR2 5	BCLR2 DIR2 5	BCS/BLO REL 3									BIT 2 IMM2	BIT DIR3 3	BIT EXT3 4	BIT IX22 5	BIT IX11 4	BIT IX 3		
6	BRSET3 DIR2 5	BSET3 DIR2 5	BNE REL2 3	ROR DIR1 5	RORA INH1 3	RORX INH2 3	ROR IX1 6	ROR IX1 6				LDA 2 IMM2	LDA DIR3 3	LDA EXT3 4	LDA IX22 5	LDA IX11 4	LDA IX 3		
7	BRCLR3 DIR2 5	BCLR3 DIR2 5	BEQ REL2 3	ASR DIR1 5	ASRA INH1 3	ASRX INH2 3	ASR IX1 6	ASR IX1 6		TAX 1 INH			STA 2 IMM2	STA DIR3 3	STA EXT3 4	STA IX22 5	STA IX11 4		
8	BRSET4 DIR2 5	BSET4 DIR2 5	BHOC REL2 3	ASL/LSL DIR1 5	ASL/LSLA INH1 3	ASL/LSLX INH2 3	ASL/LSL IX1 6	ASL/LSL IX1 6		CLC 1 INH		EOR 2 IMM2	EOR DIR3 3	EOR EXT3 4	EOR IX22 5	EOR IX11 4	EOR IX 3		
9	BRCLR4 DIR2 5	BCLR4 DIR2 5	BHCS REL2 3	ROL DIR1 5	ROLA INH1 3	ROLX INH2 3	ROL IX1 6	ROL IX1 6		SEC 1 INH		ADC 2 IMM2	ADC DIR3 3	ADC EXT3 4	ADC IX22 5	ADC IX11 4	ADC IX 3		
A	BRSET5 DIR2 5	BSET5 DIR2 5	BPL REL2 3	DEC DIR1 5	DECA INH1 3	DECX INH2 3	DEC IX1 6	DEC IX1 6		CLI 1 INH		ORA 2 IMM2	ORA DIR3 3	ORA EXT3 4	ORA IX22 5	ORA IX11 4	ORA IX 3		
B	BRCLR5 DIR2 5	BCLR5 DIR2 5	BMI REL 3							SEI 1 INH		ADD 2 IMM2	ADD DIR3 3	ADD EXT3 4	ADD IX22 5	ADD IX11 4	ADD IX 3		
C	BRSET6 DIR2 5	BSET6 DIR2 5	BMC REL2 3	INC DIR1 5	INCA INH1 3	INCX INH2 3	INC IX1 6	INC IX1 6		RSP 1 INH			JMP 2 DIR3	JMP EXT3 3	JMP IX22 4	JMP IX11 3	JMP IX 2		
D	BRCLR6 DIR2 5	BCLR6 DIR2 5	BMS REL2 3	TST DIR1 5	TSTA INH1 3	TSTX INH2 3	TST IX1 6	TST IX1 6		NOP 1 INH		BSR 2 REL2	JSR DIR3 3	JSR EXT3 3	JSR IX22 3	JSR IX11 3	JSR IX 5		
E	BRSET7 DIR2 5	BSET7 DIR2 5	BIL REL 3						STOP 1 INH			LDX 2 IMM2	LDX DIR3 3	LDX EXT3 3	LDX IX22 3	LDX IX11 3	LDX IX 3		
F	BRCLR7 DIR2 5	BCLR7 DIR2 5	BH REL2 3	CLR DIR1 5	CLRA INH1 3	CLR INH2 3	CLR IX1 6	CLR IX1 6		TXA 2 INH			STX 2 DIR3	STX EXT3 3	STX IX22 3	STX IX11 3	STX IX 4		
INH = Inherent			REL = Relative			MSB			0			MSB of Opcode in Hexadecimal							
IMM = Immediate			IX = Indexed, No Offset			LSB			0			Number of Cycles							
DIR = Direct			IX1 = Indexed, 8-Bit Offset			0			BRSET0 DIR 5			Opcode Mnemonic							
EXT = Extended			IX2 = Indexed, 16-Bit Offset			0			BRSET0 DIR 5			Number of Bytes/Addressing Mode							

General Release Specification — MC68HC05RC17

Section 12. Electrical Specifications

12.1 Contents

12.2	Introduction	111
12.3	Maximum Ratings	112
12.4	Operating Range	113
12.5	Thermal Characteristics	113
12.6	DC Electrical Characteristics (5.0 Vdc).	114
12.7	DC Electrical Characteristics (3.3 Vdc).	115
12.8	DC Electrical Characteristics (2.2 Vdc).	116
12.9	Control Timing (3.3 Vdc and 5.0 Vdc).	117
12.10	Control Timing (2.2 Vdc).	118

12.2 Introduction

This section contains the electrical and timing specifications.

Electrical Specifications

12.3 Maximum Ratings

Maximum ratings are the extreme limits to which the MCU can be exposed without permanently damaging it.

The MCU contains circuitry to protect the inputs against damage from high static voltages; however, do not apply voltages higher than those shown in the table below. Keep V_{IN} and V_{OUT} within the range $V_{SS} \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{DD}$. Connect unused inputs to the appropriate voltage level, either V_{SS} or V_{DD} .

Rating	Symbol	Value	Unit
Supply Voltage	V_{DD}	−0.3 to +7.0	V
Input Voltage	V_{IN}	$V_{SS} - 0.3$ to $V_{DD} + 0.3$	V
Current Drain Per Pin Excluding V_{DD} and V_{SS}	I	25	mA
Operating Junction Temperature	T_J	+150	°C
Storage Temperature Range	T_{stg}	−65 to +150	°C

NOTE: This device is not guaranteed to operate properly at the maximum ratings. Refer to [12.6 DC Electrical Characteristics \(5.0 Vdc\)](#), [12.7 DC Electrical Characteristics \(3.3 Vdc\)](#), and [12.8 DC Electrical Characteristics \(2.2 Vdc\)](#) for guaranteed operating conditions.

12.4 Operating Range

Characteristic	Symbol	Value	Unit
Operating Temperature Range MC68HC05RC17 (Standard)	T_A	T_L to T_H 0 to +70	$^{\circ}\text{C}$

12.5 Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance Plastic Dual In-Line Package Small Outline Intergrated Circuit Package	θ_{JA}	60 60	$^{\circ}\text{C/W}$

Electrical Specifications

12.6 DC Electrical Characteristics (5.0 Vdc)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage $I_{Load} = 10.0 \mu A$ $I_{Load} = -10.0 \mu A$	V_{OL} V_{OH}	— $V_{DD} - 0.1$	— —	0.1 —	V
Output High Voltage ($I_{Load} = 2.0 \text{ mA}$) Port A, Port B, Port C (1–7) ($I_{Load} = 20.0 \text{ mA}$) IRO ($I_{Load} = 4.0 \text{ mA}$) Port C (Bit 0)	V_{OH}	$V_{DD} - 0.8$ $V_{DD} - 0.7$ $V_{DD} - 0.8$	$V_{DD} - 0.2$ $V_{DD} - 0.2$ $V_{DD} - 0.2$	— — —	V
Output Low Voltage ($I_{Load} = 3.0 \text{ mA}$) Port A, Port B, Port C (1–7) ($I_{Load} = 25.0 \text{ mA}$) IRO ($I_{Load} = 20.0 \text{ mA}$) Port C (Bit 0)	V_{OL}	— — —	0.2 0.2 0.2	0.4 0.8 0.4	V
Input High Voltage Port A, Port B, Port C, \overline{IRQ} , \overline{RESET} , \overline{LPRST} , OSC1	V_{IH}	$0.7 \times V_{DD}$	—	V_{DD}	V
Input Low Voltage Port A, Port B, Port C, \overline{IRQ} , \overline{RESET} , \overline{LPRST} , OSC1	V_{IL}	V_{SS}	—	$0.2 \times V_{DD}$	V
Input Hysteresis (\overline{RESET})	V_{HYST}	0.8	0.9	1	V
Supply Current (see Notes) Run ($f_{OP} = 2.1 \text{ MHz}$) Wait with PLL Enabled ($f_{OP} = 2.1 \text{ MHz}$) Wait with PLL Disabled ($f_{OP} = 16.384 \text{ kHz}$) Stop 25 °C 0 °C to +70 °C	I_{DD}	— — — — —	3.1 1.1 39.2 0.4 0.4	4.0 1.5 60.0 10.0 20.0	mA mA μA μA μA
I/O Ports Hi-Z Leakage Current Port A, Port B, Port C	I_{OZ}	–10	—	10	μA
Input Current \overline{RESET} , \overline{LPRST} , \overline{IRQ} , OSC1 PB0–PB7 with Pullups Enabled ($V_{IN} = 0.2 \times V_{DD}$) PB0–PB7 with Pullups Enabled ($V_{IN} = 0.7 \times V_{DD}$)	I_{In}	–1 –100 –50	— –496 –169	1 –700 –300	μA
Capacitance Ports (as Input or Output) \overline{RESET} , \overline{LPRST} , \overline{IRQ}	C_{Out} C_{INT}	— —	— —	12 8	pF

NOTES:

- $V_{DD} = 5.0 \text{ Vdc} \pm 10\%$, $V_{SS} = 0 \text{ Vdc}$, $T_A = 0 \text{ }^\circ\text{C}$ to $+70 \text{ }^\circ\text{C}$, unless otherwise noted
- All values shown reflect average measurements.
- All current measurements represent the summation of current through V_{DD} and V_{DDSYN} supply pins.
- Typical values at midpoint of voltage range, 25 °C only
- To minimize current consumption in wait mode, disable the PLL before executing the WAIT instruction. Internal bus speed will be that of the 32.768-kHz external frequency.
- Wait I_{DD} : only core timer active
- Run (with PLL enabled) I_{DD} , wait I_{DD} (with PLL enabled): Measured using external square wave clock source ($f_{OSC} = 4.2 \text{ MHz}$); all inputs 0.2 V from rail; no dc loads; less than 50 pF on all outputs; $C_L = 20 \text{ pF}$ on OSC2. Wait I_{DD} (with PLL disabled): Measured using external square wave clock source ($f_{OSC} = 33 \text{ kHz}$).
- Wait, stop I_{DD} : Port A and port C configured as inputs; port B configured as outputs; $V_{IL} = 0.2 \text{ V}$; $V_{IH} = V_{DD} - 0.2 \text{ V}$
- Stop I_{DD} is measured with $OSC1 = V_{SS}$.
- Wait I_{DD} is affected linearly by the OSC2 capacitance.
- Pullups are designed to be capable of pulling to V_{IH} within 10 μs for a 100 pF, 4-k Ω load.

12.7 DC Electrical Characteristics (3.3 Vdc)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage $I_{Load} = 10.0 \mu A$ $I_{Load} = -10.0 \mu A$	V_{OL} V_{OH}	— $V_{DD} - 0.1$	— —	0.1 —	V
Output High Voltage ($I_{Load} = -0.8 \text{ mA}$) Port A, Port B, Port C (1–7) ($I_{Load} = -4.0 \text{ mA}$) IRO ($I_{Load} = -2.0 \text{ mA}$) Port C (Bit 0)	V_{OH}	$V_{DD} - 0.3$ $V_{DD} - 0.7$ $V_{DD} - 0.3$	$V_{DD} - 0.1$ $V_{DD} - 0.1$ $V_{DD} - 0.1$	— — —	V
Output Low Voltage ($I_{Load} = 1.2 \text{ mA}$) Port A, Port B, Port C (1–7) ($I_{Load} = 9.0 \text{ mA}$) IRO ($I_{Load} = 8.0 \text{ mA}$) Port C (Bit 0)	V_{OL}	— — —	0.1 0.1 0.1	0.3 0.8 0.3	V
Input High Voltage Port A, Port B, Port C, \overline{IRQ} , \overline{RESET} , \overline{LPRST} , OSC1	V_{IH}	$0.7 \times V_{DD}$	—	V_{DD}	V
Input Low Voltage Port A, Port B, Port C, \overline{IRQ} , \overline{RESET} , \overline{LPRST} , OSC1	V_{IL}	V_{SS}	—	$0.3 \times V_{DD}$	V
Supply Current (see Notes) Run ($f_{OP} = 2.1 \text{ MHz}$) Wait with PLL Enabled ($f_{OP} = 2.1 \text{ MHz}$) Wait with PLL Disabled ($f_{OP} = 16.384 \text{ kHz}$) Stop 25 °C 0 °C to +70 °C	I_{DD}	— — — — —	1.6 0.52 29.5 0.15 0.15	2.0 1.0 50.0 4.0 8.0	mA mA μA μA μA
I/O Ports Hi-Z Leakage Current Port A, Port B, Port C	I_{OZ}	–6	—	6	μA
Input Current \overline{RESET} , \overline{LPRST} , \overline{IRQ} , OSC1 PB0–PB7 with Pullups Enabled ($V_{IN} = 0.3 \times V_{DD}$) PB0–PB7 with Pullups Enabled ($V_{IN} = 0.7 \times V_{DD}$)	I_{IN}	–0.6 –50 –25	— –209 –83	0.6 –330 –180	μA
Capacitance Ports (as Input or Output) \overline{RESET} , \overline{LPRST} , \overline{IRQ}	C_{Out} C_{INT}	— —	— —	12 8	pF

NOTES:

- $V_{DD} = 3.3 \text{ Vdc} \pm 10\%$, $V_{SS} = 0 \text{ Vdc}$, $T_A = 0 \text{ }^\circ\text{C}$ to $+70 \text{ }^\circ\text{C}$, unless otherwise noted
- All values shown reflect average measurements.
- Typical values at midpoint of voltage range, 25 °C only
- All current measurements represent the summation of current through V_{DD} and V_{DDSYN} supply pins.
- To minimize current consumption in wait mode, disable the PLL before executing the WAIT instruction. Internal bus speed will be that of the 32.768-kHz external frequency.
- Wait I_{DD} : only core timer active
- Run (with PLL enabled) I_{DD} , wait I_{DD} (with PLL enabled): Measured using external square wave clock source ($f_{OSC} = 4.2 \text{ MHz}$); all inputs 0.2 V from rail; no dc loads;; less than 50 pF on all outputs; $C_L = 20 \text{ pF}$ on OSC2. Wait I_{DD} (with PLL disabled): Measured using external square wave clock source ($f_{OSC} = 33 \text{ kHz}$).
- Wait, stop I_{DD} : Port A and port C configured as inputs, port B configured as outputs; $V_{IL} = 0.2 \text{ V}$; $V_{IH} = V_{DD} - 0.2 \text{ V}$
- Stop I_{DD} is measured with OSC1 = V_{SS} .
- Wait I_{DD} is affected linearly by the OSC2 capacitance.
- Pullups are designed to be capable of pulling to V_{IH} within 10 μs for a 100 pF, 4-k Ω load.

Electrical Specifications

12.8 DC Electrical Characteristics (2.2 Vdc)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Voltage $I_{Load} = 10.0 \mu A$ $I_{Load} = -10.0 \mu A$	V_{OL} V_{OH}	— $V_{DD} - 0.1$	— —	0.1 —	V
Output High Voltage ($I_{Load} = -0.6 \text{ mA}$) Port A, Port B, Port C (1–7) ($I_{Load} = -2.5 \text{ mA}$) IRO ($I_{Load} = -1.2 \text{ mA}$) Port C (Bit 0)	V_{OH}	$V_{DD} - 0.3$ $V_{DD} - 0.7$ $V_{DD} - 0.3$	$V_{DD} - 0.1$ $V_{DD} - 0.1$ $V_{DD} - 0.1$	— — —	V
Output Low Voltage ($I_{Load} = 1.0 \text{ mA}$) Port A, Port B, Port C (1–7) ($I_{Load} = 8.0 \text{ mA}$) IRO ($I_{Load} = 7.0 \text{ mA}$) Port C (Bit 0)	V_{OL}	— — —	0.1 0.1 0.1	0.3 0.8 0.3	V
Input High Voltage Port A, Port B, Port C, \overline{IRQ} , \overline{RESET} , \overline{LPRST} , OSC1	V_{IH}	$0.7 \times V_{DD}$	—	V_{DD}	V
Input Low Voltage Port A, Port B, Port C, \overline{IRQ} , \overline{RESET} , \overline{LPRST} , OSC1	V_{IL}	V_{SS}	—	$0.4 \times V_{DD}$	V
Supply Current (see Notes) Run ($f_{OP} = 1.0 \text{ MHz}$) Wait with PLL Enabled ($f_{OP} = 1.0 \text{ MHz}$) Wait with PLL Disabled ($f_{OP} = 16.384 \text{ kHz}$) Stop 25 °C 0 °C to +70 °C	I_{DD}	— — — — —	0.5 0.2 21.0 0.1 0.1	1.0 0.8 40.0 1.0 4.0	mA mA μA μA μA
I/O Ports Hi-Z Leakage Current Port A, Port B, Port C	I_{OZ}	–4	—	4	μA
Input Current \overline{RESET} , \overline{LPRST} , \overline{IRQ} , OSC1 PB0–PB7 with Pullups Enabled ($V_{IN} = 0.4 \times V_{DD}$) PB0–PB7 with Pullups Enabled ($V_{IN} = 0.7 \times V_{DD}$)	I_{IN}	–0.4 –25 –15	— –79 –35	0.4 –105 –65	μA
Capacitance Ports (as Input or Output) \overline{RESET} , \overline{LPRST} , \overline{IRQ}	C_{Out} C_{INT}	— —	— —	12 8	pF

NOTES:

- $V_{DD} = 2.2 \text{ Vdc} \pm 10\%$, $V_{SS} = 0 \text{ Vdc}$, $T_A = 0 \text{ °C}$ to $+70 \text{ °C}$, unless otherwise noted
- All values shown reflect average measurements.
- Typical values at midpoint of voltage range, 25 °C only
- All current measurements represent the summation of current through V_{DD} and V_{DDSYN} supply pins.
- To minimize current consumption in wait mode, disable the PLL before executing the WAIT instruction. Internal bus speed will be f_{osc} of crystal $\div 2$.
- Wait I_{DD} : only core timer active
- Run (with PLL enabled) I_{DD} , wait I_{DD} (with PLL enabled): Measured using external square wave clock source ($f_{osc} = 2.0 \text{ MHz}$); all inputs 0.2 V from rail; no dc loads; less than 50 pF on all outputs; $C_L = 20 \text{ pF}$ on OSC2. Wait I_{DD} (with PLL disabled): Measured using external square wave clock source ($f_{osc} = 33 \text{ kHz}$).
- Wait, stop I_{DD} : Port A and port C configured as inputs, port B configured as outputs, $V_{IL} = 0.2 \text{ V}$, $V_{IH} = V_{DD} - 0.2 \text{ V}$
- Stop I_{DD} is measured with OSC1 = V_{SS} .
- Wait I_{DD} is affected linearly by the OSC2 capacitance.
- Pullups are designed to be capable of pulling to V_{IH} within 25 μs for a 100 pF, 4-k Ω load.

12.9 Control Timing (3.3 Vdc and 5.0 Vdc)

Characteristic	Symbol	Min	Max	Unit
Frequency of Operation Assumes use of 32.768-kHz Crystal Only	f_{OSC}	32.768	32.768	kHz
Internal Operating Frequency Assumes use of 32.768-kHz Crystal Only $f_{OP} = f_{OSC} \div 2$ if PLL is NOT Driving Internal Bus $f_{OP} = 32.768 \text{ kHz} \times N$, where $N = 16, 32, \text{ or } 64$ (Selectable) and PLL is Driving Internal Bus	f_{OP}	— 0.524	16.384 2.097	kHz MHz
Cycle Time Assumes $f_{OP} = 2.097 \text{ MHz}$	t_{CYC}	480	—	ns
Crystal Oscillator Startup Time Assumes $f_{OP} = 2.097 \text{ MHz}$	t_{OXOV}	—	100	ms
Stop Recovery Startup Time (Crystal Oscillator) Assumes $f_{OP} = 2.097 \text{ MHz}$	t_{ILCH}	—	100	ms
RESET Pulse Width Assumes $f_{OP} = 2.097 \text{ MHz}$	t_{RL}	1.5	—	t_{CYC}
Interrupt Pulse Width Low (Edge-Triggered) Assumes $f_{OP} = 2.097 \text{ MHz}$	t_{ILIH}	125	—	ns
Interrupt Pulse Period Assumes $f_{OP} = 2.097 \text{ MHz}$	t_{ILIL}	Note 2	—	t_{CYC}
OSC1 Pulse Width	t_{OH}, t_{OL}	90	—	ns

NOTES:

- $V_{DD} = 3.0 \text{ to } 5.5 \text{ Vdc} \pm 10\%$, $V_{SS} = 0 \text{ Vdc}$, $T_A = 0^\circ\text{C to } +70^\circ\text{C}$, unless otherwise noted
- The minimum period, t_{ILIL} , should not be less than the number of cycle times it takes to execute the interrupt service routine plus $2T t_{CYC}$.


Electrical Specifications

12.10 Control Timing (2.2 Vdc)

Characteristic	Symbol	Min	Max	Unit
Frequency of Operation Assumes Use of 32.768-kHz Crystal Only	f_{OSC}	32.768	32.768	kHz
Internal Operating Frequency Assumes use of 32.768-kHz Crystal Only $f_{OP} = f_{OSC} \div 2$ if PLL is NOT Driving Internal Bus $f_{OP} = 32.768 \text{ kHz} \times N$, where $N = 16, 32, \text{ or } 64$ (Selectable) and PLL is Driving Internal Bus	f_{OP}	— 0.524	16.384 1.049	kHz MHz
Cycle Time Assumes $f_{OP} = 1.049 \text{ MHz}$	t_{CYC}	1000	—	ns
Crystal Oscillator Startup Time Assumes $f_{OP} = 1.049 \text{ MHz}$	t_{OXOV}	—	200	ms
Stop Recovery Startup Time (Crystal Oscillator) Assumes $f_{OP} = 1.049 \text{ MHz}$	t_{ILCH}	—	200	ms
RESET Pulse Width Assumes $f_{OP} = 1.049 \text{ MHz}$	t_{RL}	1.5	—	t_{CYC}
Interrupt Pulse Width Low (Edge-Triggered) Assumes $f_{OP} = 1.049 \text{ MHz}$	t_{ILIH}	250	—	ns
Interrupt Pulse Period Assumes $f_{OP} = 1.049 \text{ MHz}$	t_{ILIL}	Note 2	—	t_{CYC}
OSC1 Pulse Width	t_{OH}, t_{OL}	180	—	ns


NOTES:

- $V_{DD} = 2.2 \text{ Vdc} \pm 10\%$, $V_{SS} = 0 \text{ Vdc}$, $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$, unless otherwise noted
- The minimum period, t_{ILIL} , should not be less than the number of cycle times it takes to execute the interrupt service routine plus $2T t_{CYC}$.

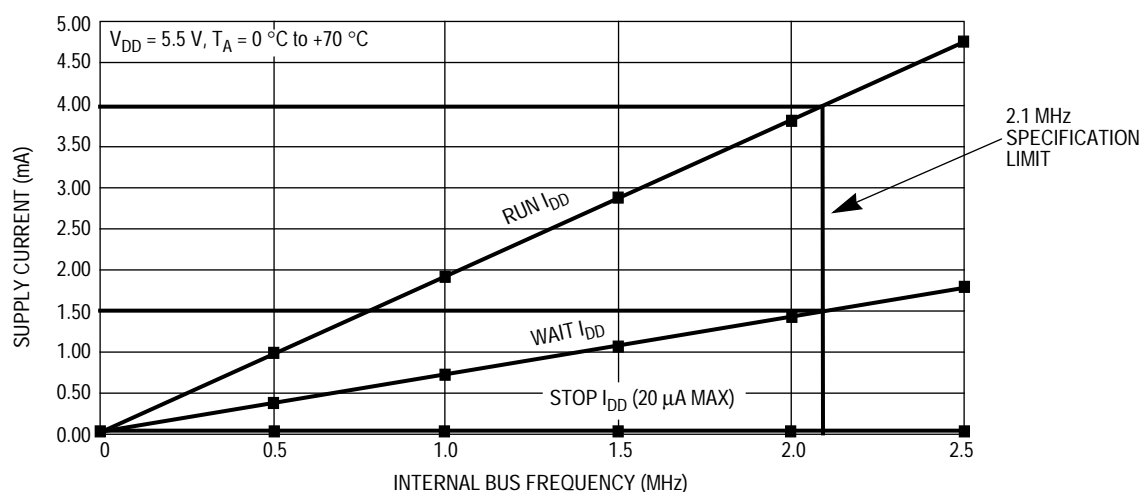


NOTE: Run and wait I_{DD} measurements are with the PLL enabled.
 Stop I_{DD} measurements are with the PLL disabled.
 Current values represent the summation of V_{DD} and V_{DDSYN} currents.

Figure 12-1. 5.5-Volt Maximum Supply Current vs Internal Clock Frequency

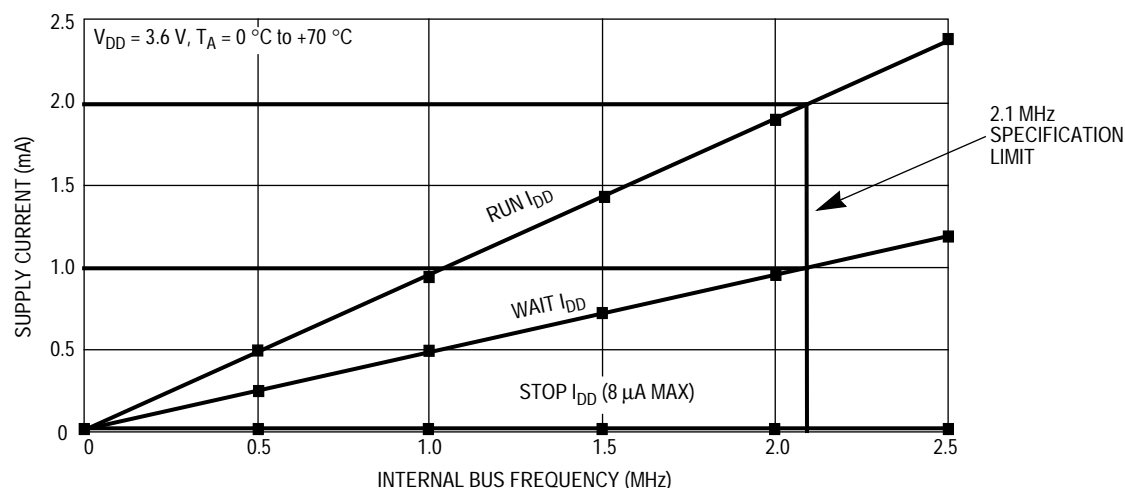


NOTE: Run and wait I_{DD} measurements are with the PLL enabled.
 Stop I_{DD} measurements are with the PLL disabled.
 Current values represent the summation of V_{DD} and V_{DDSYN} currents.

Figure 12-2. 3.6-Volt Maximum Supply Current vs Internal Clock Frequency

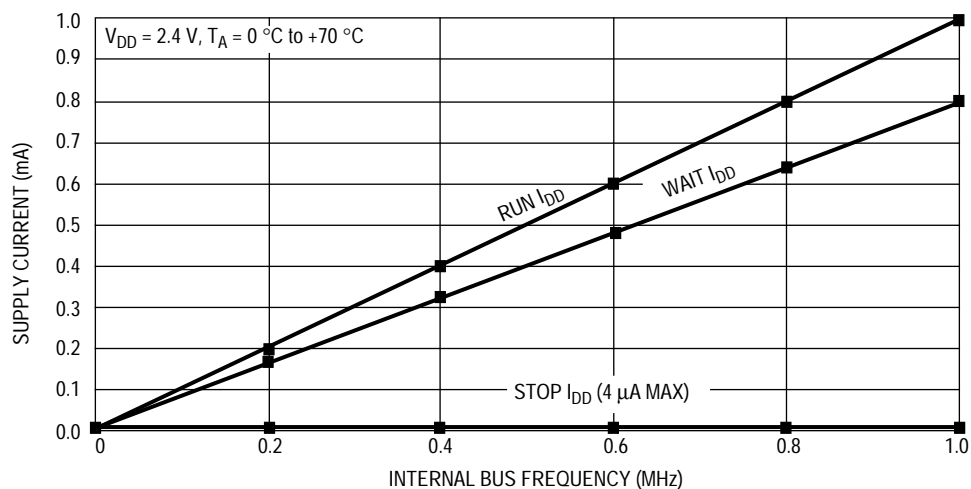

NOTE: Current values represent the summation of V_{DD} and V_{DDSYN} currents.

Figure 12-3. 2.4-Volt Maximum Supply Current vs Internal Clock Frequency

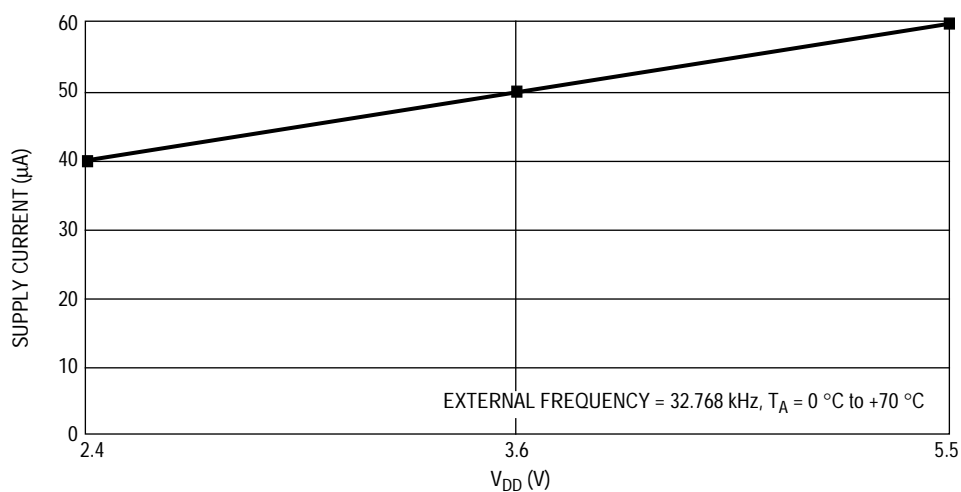

NOTE: Current values represent summation of V_{DD} and V_{DDSYN} currents.

Figure 12-4. Maximum Wait Mode Supply Current vs V_{DD} with PLL Disengaged

General Release Specification — MC68HC05RC17

Section 13. Mechanical Specifications


13.1 Contents

13.2	Introduction	121
13.3	28-Pin Plastic Dual In-Line Package (Case 710-02)	121
13.4	28-Pin Small Outline Integrated Circuit Package (Case 751F-04)	122

13.2 Introduction

This section describes the dimensions of the dual in-line package (DIP) and small outline integrated circuit (SOIC) MCU packages.

13.3 28-Pin Plastic Dual In-Line Package (Case 710-02)

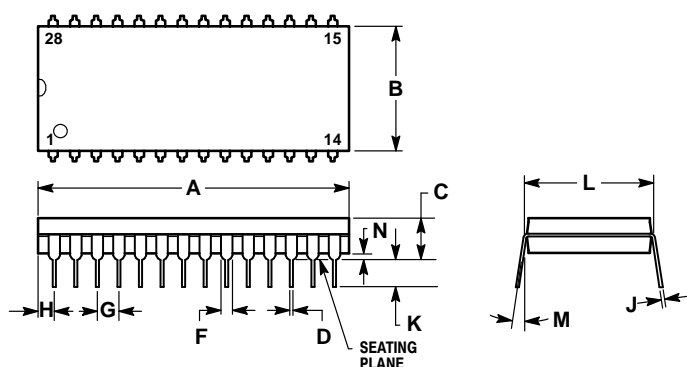


NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25mm (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	36.45	37.21	1.435	1.465
B	13.72	14.22	0.540	0.560
C	3.94	5.08	0.155	0.200
D	0.36	0.56	0.014	0.022
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.16	0.065	0.085
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	15.24 BSC		0.600 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

Mechanical Specifications

13.4 28-Pin Small Outline Integrated Circuit Package (Case 751F-04)

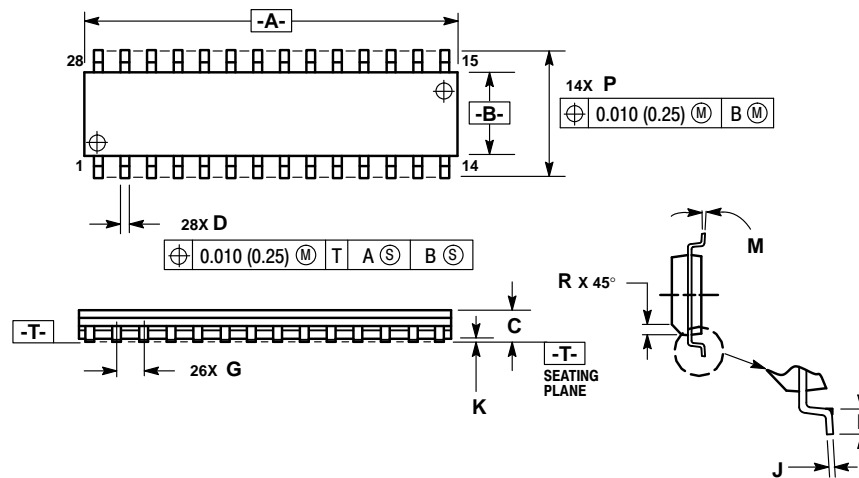

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	17.80	18.05	0.701	0.711
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.41	0.90	0.016	0.035
G	1.27 BSC		0.050 BSC	
J	0.23	0.32	0.009	0.013
K	0.13	0.29	0.005	0.011
M	0°	8°	0°	8°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

General Release Specification — MC68HC05RC17

Section 14. Ordering Information

14.1 Contents

14.2	Introduction	123
14.3	MCU Ordering Forms	123
14.4	Application Program Media.	124
14.5	ROM Program Verification	125
14.6	ROM Verification Units (RVUs).	126
14.7	MC Order Numbers	126

14.2 Introduction

This section contains instructions for ordering custom-masked ROM MCUs.

14.3 MCU Ordering Forms

To initiate an order for a ROM-based MCU, first obtain the current ordering form for the MCU from a Freescale representative. Submit the following items when ordering MCUs:

- A current MCU ordering form that is **completely filled out** (Contact your Freescale sales office for assistance.)
- A copy of the customer specification if the customer specification deviates from the Freescale specification for the MCU
- Customer's application program on one of the media listed in [14.4 Application Program Media](#)

Ordering Information

The current MCU ordering form is also available through the Freescale Freeware Bulletin Board Service (BBS). The telephone number is (512) 891-FREE. After making the connection, type bbs in lowercase letters. Then press the return key to start the BBS software.

14.4 Application Program Media

Please deliver the application program to Freescale in one of the following media:

- Macintosh^{®1} 3 1/2-inch diskette (double-sided 800 K or double-sided high-density 1.4 M)
- MS-DOS^{®2} or PC-DOS^{™3} 3 1/2-inch diskette (double-sided 720 K or double-sided high-density 1.44 M)
- MS-DOS[®] or PC-DOS[™] 5 1/4-inch diskette (double-sided double-density 360 K or double-sided high-density 1.2 M)

Use positive logic for data and addresses.

When submitting the application program on a diskette, clearly label the diskette with the following information:

- Customer name
- Customer part number
- Project or product name
- File name of object code
- Date
- Name of operating system that formatted diskette
- Formatted capacity of diskette

On diskettes, the application program must be in Motorola's S-record format (S1 and S9 records), a character-based object file format generated by M6805 cross assemblers and linkers.

1. Macintosh is a registered trademark of Apple Computer, Inc.
2. MS-DOS is a registered trademark of Microsoft Corporation.
3. PC-DOS is a trademark of International Business Machines Corporation.

NOTE: *Begin the application program at the first user ROM location. Program addresses must correspond exactly to the available on-chip user ROM addresses as shown in the memory map. Write \$00 in all non-user ROM locations or leave all nonuser ROM locations blank. Refer to the current MCU ordering form for additional requirements. Freescale may request pattern re-submission if nonuser areas contain any nonzero code.*

If the memory map has two user ROM areas with the same addresses, then write the two areas in separate files on the diskette. Label the diskette with both filenames.

In addition to the object code, a file containing the source code can be included. Freescale keeps this code confidential and uses it only to expedite ROM pattern generation in case of any difficulty with the object code. Label the diskette with the filename of the source code.

14.5 ROM Program Verification

The primary use for the on-chip ROM is to hold the customer's application program. The customer develops and debugs the application program and then submits the MCU order along with the application program.

Freescale inputs the customer's application program code into a computer program that generates a listing verify file. The listing verify file represents the memory map of the MCU. The listing verify file contains the user ROM code and may also contain nonuser ROM code, such as self-check code. Freescale sends the customer a computer printout of the listing verify file along with a listing verify form.

To aid the customer in checking the listing verify file, Freescale will program the listing verify file into customer-supplied blank preformatted Macintosh or DOS disks. All original pattern media are filed for contractual purposes and are not returned.

Check the listing verify file thoroughly, then complete and sign the listing verify form and return the listing verify form to Freescale. The signed listing verify form constitutes the contractual agreement for the creation of the custom mask.

Ordering Information

14.6 ROM Verification Units (RVUs)

After receiving the signed listing verify form, Freescale manufactures a custom photographic mask. The mask contains the customer's application program and is used to process silicon wafers. The application program cannot be changed after the manufacture of the mask begins. Freescale then produces 10 MCUs, called RVUs, and sends the RVUs to the customer. RVUs are usually packaged in unmarked ceramic and tested to 5 Vdc at room temperature. RVUs are not tested to environmental extremes because their sole purpose is to demonstrate that the customer's user ROM pattern was properly implemented. The 10 RVUs are free of charge with the minimum order quantity. These units are not to be used for qualification or production. RVUs are not guaranteed by Freescale Quality Assurance.

14.7 MC Order Numbers

Table 14-1 shows the MC order numbers for the available package types.

Table 14-1. MC Order Numbers

Package Type	Operating Temperature Range	MC Order Number
28-Pin Plastic Dual In-Line Package (DIP)	0 °C to 70 °C	MC68HC05RC17P
28-Pin Small Outline Integrated Circuit Package (SOIC)	0 °C to 70 °C	MC68HC05RC17DW

Home Page:

www.freescale.com

email:

support@freescale.com

USA/Europe or Locations Not Listed:

Freescale Semiconductor
Technical Information Center, CH370
1300 N. Alma School Road
Chandler, Arizona 85224
(800) 521-6274
480-768-2130

support@freescale.com

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
support@freescale.com

Japan:

Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku
Tokyo 153-0064, Japan
0120 191014
+81 2666 8080

support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate,
Tai Po, N.T., Hong Kong
+800 2666 8080

support.asia@freescale.com

For Literature Requests Only:

Freescale Semiconductor
Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
(800) 441-2447
303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

RoHS-compliant and/or Pb-free versions of Freescale products have the functionality and electrical characteristics of their non-RoHS-compliant and/or non-Pb-free counterparts. For further information, see <http://www.freescale.com> or contact your Freescale sales representative.

For information on Freescale's Environmental Products program, go to <http://www.freescale.com/epp>.

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

