




100% Leadfree, RoHScompliant:

DIMENSIONS

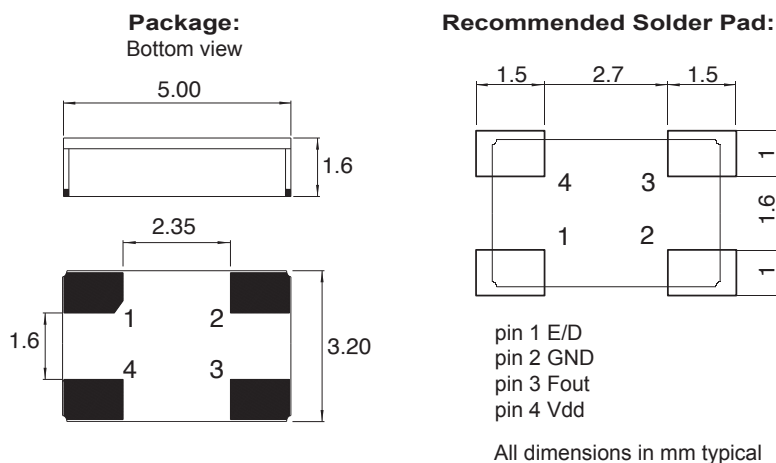

SMT Clock oscillator in ceramic package
Fundamental quartz mode frequency
High shock and vibration resistance
Wide temperature range
Low aging
Ultra low MSL
Very fast start-up
Excellent solderability
Swiss made quality
Customer specification on request

DESCRIPTION:

This SMD oscillator in ceramic package has been specially designed for surface mount using infrared, vapor phase or epoxy techniques.

APPLICATIONS:

- Avionics
- Airbone equipments
- Remote control
- Security application
- Radio Transceiver
- Microprocessor clocks

The MCSO2's are supplied on trays (128 pcs / tray)

For pick-and-place equipment, the parts are available in 12mm tapes with 250 parts min
1000 parts min

ELECTRICAL CHARACTERISTICS AT +25°C

Frequency stability Over temperature range (see ordering info) Including: adjustment at 25°C long term aging 10 years over supply voltage $\pm 5\%$ over load min to max	$\Delta F/F$	$\leq \pm 100$	ppm
Frequency stability version T Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 1 year over supply voltage $\pm 5\%$ over load min to max	$\Delta F/F$	$\leq \pm 50$	ppm
Supply voltage $\pm 5\%$ 1)*	Vdd	1.8 / 2.5 / 3.3 / 5	V
Input current	Idd	see table 1	
Output signal		HC-MOS compatible	
Symmetry at Vdd/2		40 / 60	%
Rise & fall time $\leq 20\text{MHz}$ For F=32.768 kHz rise & fall time $\leq 150\text{ns}$ (load 15pf 20% to 80%)		≤ 7	ns
Rise & fall time $\geq 20\text{MHz}$ (load 15pf 10% to 90%)		≤ 3	ns
Level "0" & "1"		$< 0.4 \times V_{dd} - 0.5$	V
Start-up time	t	< 5	ms
Load min / max		3/47	pF

* 1) C = 47nF ceramic must be connected between GND & Vdd

**TABLE 1: Idd
(Without load)**

Frequency	Fz 32 kHz	F=< 10MHz	≤ 20MHz	>20 to 225MHz
W =Vdd = 2.5V	< 300μA	< 2mA	< 3mA	< 25mA
V =Vdd = 3.3V	< 1mA	< 4mA	< 5mA	< 30mA
blank=Vdd = 5V	< 2mA	< 6mA	< 7mA	< 40mA

STANDARD FREQUENCIES:

Frequency «MHz»						
3.6864	4	8	10	12	12.8	14.7456
16	20	24	40	48		
Other frequencies from 10 kHz up to 225 MHz on request						

**ENVIRONMENTAL
CHARACTERISTICS:**

Storage temp. range	-65 to +125°C
Vibration resistance	10 to 2000Hz / 20g
Shocks no resistance	5000g / 0.3ms / ½ sine

**TERMINATIONS AND
PROCESSING:**

Reflow soldering	+260°C / 10s max
Package	Ceramic 5 x 3.2 x 1.6mm
Lids	Ceramic
Terminations option T3 on request	with tinned Ag/Cu/Zn
E/D option 1 on request Reaction time < 1μs	Pin 1 open → Pin 3 Clock H → Clock L → Low

- No power E/D function (pin 1) before Vdd is setting on
- E/D option not available for F < 500 kHz
- E/D option on request (very low consumption in disable mode).

**PRODUCT DESCRIPTION AND
ORDERING INFORMATION:**

MCSO2 H V T - C 20MHz				E/D	T3	XXX
H	> 20MHz					
blank	≤ 20MHz					
Z	= Vdd 1.8V			option 1 E/D		
W	= Vdd 2.5V			enable / disable		
V	= Vdd 3.3V			option 2		
blank	= Vdd 5V			blank Au plated		
T	= +50ppm			T3 = tinned		
blank	= ±100ppm					
A	= 0 to 70°C			customer		
B	= -40 to 85°C			spec N°		
C	= -55 to 125°C					
X	= custom					
Frequency						
A unique part number will be generated for each product specification						
20xxxx-EA00			xxx pcs (in ESD plastic tray)			
200xxx-ML00			xxx pcs (in tape & reel, any quantity)			

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com