

T-1 3/4 PACKAGE NPN PHOTOTRANSISTOR

MID-54422


Description

The MID-54422 is a NPN silicon phototransistor mounted in a lensed, water clear plastic package. The lensing effect of the package allows an acceptance view angle of 40° so that the product performs a high directional characteristic.

Features

- Wide range of collector current
- Lensed for high sensitivity
- Low cost plastic package
- Standard T-1 3/4 (5mm) package.
- Acceptance angle : 40°

Package Dimensions

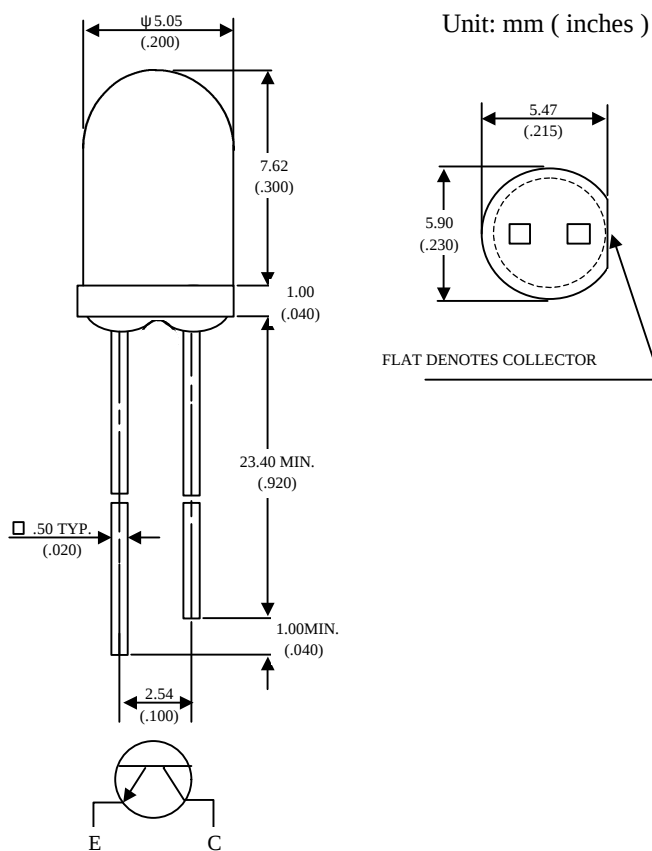

Notes :

- 1.Tolerance is ± 0.25 mm (.010") unless otherwise noted.
- 2.Protruded resin under flange is 1.0 mm (.040") max.
- 3.Lead spacing is measured where the leads emerge from the package.

Absolute Maximum Ratings

@ $T_A = 25^\circ\text{C}$

Parameter	Maximum Rating	Unit
Power Dissipation	150	mW
Collector-Emitter Voltage	30	V
Emitter-Collector Voltage	5	V
Operating Temperature Range	-55°C to $+100^\circ\text{C}$	
Storage Temperature Range	-55°C to $+100^\circ\text{C}$	
Lead Soldering Temperature	260°C for 5 seconds	

UNi

Unity Opto Technology Co., Ltd.

02/04/2002

Optical-Electrical Characteristics

@ $T_A = 25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Min.	Typ .	Max.	Unit
Collector-Emitter Breakdown Voltage	$I_c = 0.1\text{mA}$ $E_e = 0$	$V_{(BR)CEO}$	30			V
Emitter-Collector Breakdown Voltage	$I_e = 0.1\text{mA}$ $E_e = 0$	$V_{(BR)ECO}$	5			V
Collector-Emitter Saturation Voltage	$I_c = 0.5\text{mA}$ $E_e = 0.1\text{mW/cm}^2$	$V_{CE(SAT)}$			0.4	V
Rise Time	$V_{cc} = 5\text{V}$, $R_L = 1\text{K}\Omega$ $I_c = 1\text{mA}$	T_r		15		μS
Fall Time		T_f		15		
Collector Dark Current	$V_{CE} = 10\text{V}$ $E_e = 0$	I_{CEO}			100	nA
On State Collector Current	$V_{CE} = 5\text{V}$ $E_e = 0.1\text{mW/cm}^2$	$I_{C(ON)}$		1		mA

Typical Optical-Electrical Characteristic Curves

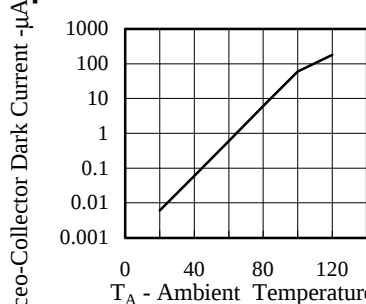


FIG.1 COLLECTOR DARK CURRENT

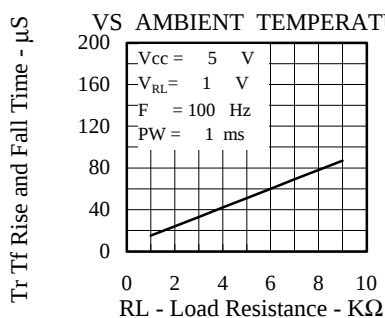


FIG.3 RISE AND FALL TIME
VS LOAD RESISTANCE

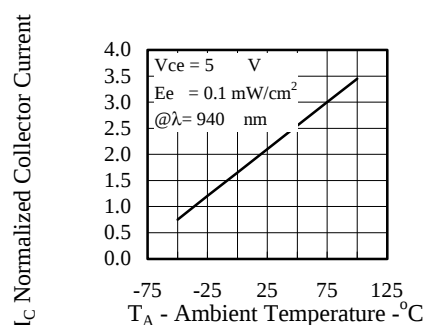


FIG.2 NORMALIZED COLLECTOR CURRENT

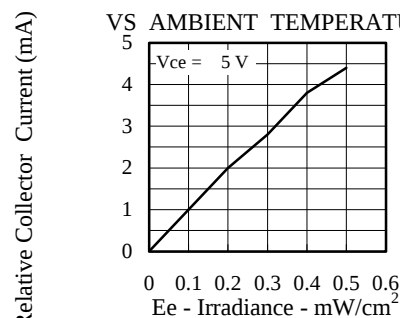


FIG.4 RELATIVE COLLECTOR CURRENT
VS IRRADIANCE

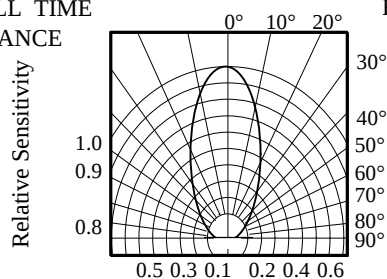


FIG.5 SENSITIVITY DIAGRAM