

ML7xx45 SERIES

1310nm InGaAsP FP LASER DIODES

Notice: Some parametric limits are subject to change.

TYPE NAME

ML720J45S , ML720K45S, ML720Y45S
ML725B45F , ML725C45F

DESCRIPTION

ML7XX45 series are InGaAsP laser diodes which provide a stable, single transverse mode oscillation with emission wavelength of 1310nm and standard continuous light output of 5mW.

ML7XX45 are hermetically sealed devices having the photo diode for optical output monitoring. This is suitable for such applications as FTTH (Fiber to the Home) and ~ 1Gbps Ethernet / Fiber channel systems.

FEATURES

- 1310nm typical emission wavelength, FP-LDs
- Low threshold current, low operating current
- Wide temperature range operation (Tc=-40 to 85deg.C)
- φ5.6mm TO-CA N package
- Flat window cap : ML720J45S, ML725B45F
- Ball lens cap : ML720K45S, ML725C45F, ML720Y45S

APPLICATION

- ~155Mbps FTTH system
- ~1Gbps Ethernet , Fiber channel

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Ratings	Unit
Po	Light output power	CW	10[7]	mW
VRL	Laser reverse voltage	-	2	V
VRD	PD reverse voltage	-	20	V
IFD	PD forward current	-	2	mA
Tc	Operation temperature	-	-40 to +85	deg.C
Tstg	Storage temperature	-	-40 to +100	deg.C

www.DataSheet4U.com

ELECTRICAL/OPTICAL CHARACTERISTICS(Tc=25°C)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
Ith	Threshold current	CW		3	5	15	mA
Iop	Operation current	CW, Po=5mW		10	20	35	mA
Vop	Operating voltage	CW, Po=5mW		---	1.1	1.5	V
η	Slope efficiency	CW, Po=5mW		0.3[0.2]	0.4[0.3]	0.7[0.5]	mW/mA
λc	Center wavelength	CW, Po=5mW		1290	1310	1330	nm
Δλ	Spectral Width	CW, Po=5mW,RMS(-20dB)		---	1	2	nm
θ ∥	Beam divergence angle(parallel)	CW, Po=5mW		---	25[11]	---	deg.
θ ⊥	Beam divergence angle(perpendicular)	CW, Po=5mW		---	30[11]	---	deg.
tr,tf	Rise and Fall time (10%-90%)	Ib=Ith,Po=5mW,10-90%		---	0.3	0.7	nsec
Im	Monitor Current (PD)	CW, Po=5mW, VRD=1V,		0.1	0.5	0.9	mA
Id	Dark Current (PD)	VRD=10V		---	---	0.1	μA
Ct	Capacitance (PD)	VRD=10V, f=1MHz		---	10	20	pF
Pf(Note2)	Fiber Coupling characteristics at peak coupling<3>	CW, PL=5mW,SI10/125		0.4	0.8	---	mW
Df(Note2)		CW, PL=5mW,SI10/125	ML720K45S ML725C45F	5.0	5.8	6.2	mm
			ML720Y45S	6.0	6.5	7.0	

Note : <1> [] applied to the lens cap type.

Note : <2> Pf,Df are applied to the ball lens type.

Note : <3> Df is a distance between reference plane of the base to the fiber.



MITSUBISHI
ELECTRIC

May 2004

MITSUBISHI LASER DIODES

ML7xx45 SERIES

1310nm InGaAsP FP LASER DIODES



OUTLINE DRAWINGS

ML720J45S


ML725B45F



Dimension : mm

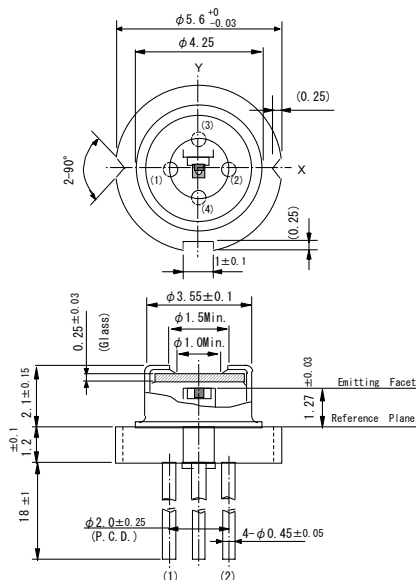

ML720J45S





ML725B45F
Pin Connection
(Top view)

ML720K45S


ML725C45F



Dimension : mm

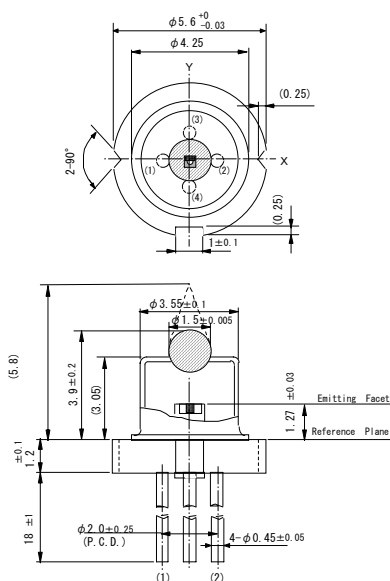

ML720K45S



ML725C45F
Pin Connection
(Top view)



MITSUBISHI
ELECTRIC

May 2004

MITSUBISHI LASER DIODES

ML7xx45 SERIES

1310nm InGaAsP FP LASER DIODES

OUTLINE DRAWINGS

