




LOCKING HEADER STRAIGHT POST

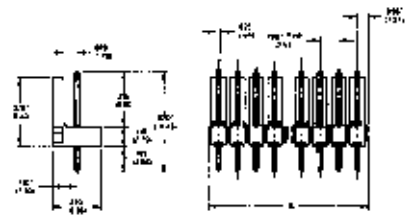


POLARIZING HEADER STRAIGHT POST

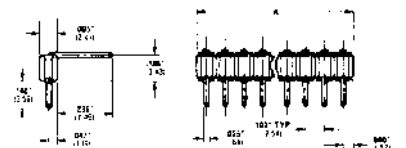


FLAT HEADER RIGHT ANGLE POST

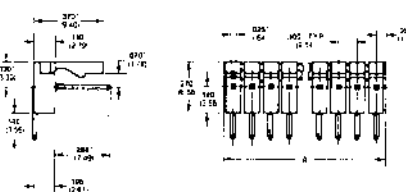

LOCKING HEADER RIGHT ANGLE POST

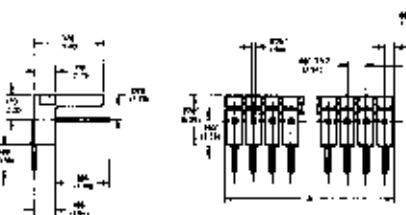

POLARIZING HEADER RIGHT ANGLE POST

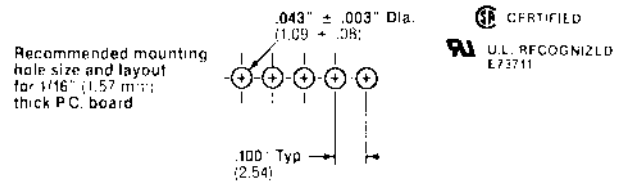

- ITW PANCON MAS-CON® .100" MOLDED WAFER HEADERS**
- Prescored wafer permits breaking header to any length for prototype or short production runs.
 - Wafer material: Thermoplastic (U.L. 94V-O).
 - Industry interchangeable.
 - Standard Plating: Tin.

.100" MOLDED WAFER HEADERS

Cat. No.	No. Circuits	Dim. A Inches	Net Price Each			
			1-999	1000-2499	2500-4999	5000-Up
LOCKING HEADER, STRAIGHT POST—.025" SQUARE						
MLSS100-2-D	2	.200	\$.26	\$.15	\$.12	\$.07
MLSS100-3-D	3	.300	.35	.20	.16	.10
MLSS100-4-D	4	.400	.49	.28	.22	.13
MLSS100-5-D	5	.500	.60	.34	.27	.17
MLSS100-6-C	6	.600	.67	.38	.30	.18
MLSS100-7-C	7	.700	.81	.46	.36	.22
MLSS100-8-C	8	.800	.88	.50	.39	.24
MLSS100-9-C	9	.900	.94	.53	.43	.26
MLSS100-10-C	10	1.000	1.08	.61	.49	.30
MLSS100-11-C	11	1.100	1.00	1.00	.59	.39
MLSS100-12-C	12	1.200	1.27	.72	.57	.35
MLSS100-13-C	13	1.300	1.19	1.19	.70	.46
MLSS100-14-C	14	1.400	1.29	1.29	.76	.50
MLSS100-15-C	15	1.500	1.59	1.59	.94	.62
MLSS100-16-C	16	1.600	1.97	1.12	.89	.54

POLARIZING HEADER, STRAIGHT POST—.025" SQUARE

MPSS100-2-D	2	.200	.25	.25	.14	.10
MPSS100-3-D	3	.300	.28	.28	.28	.14
MPSS100-4-D	4	.400	.54	.30	.24	.15
MPSS100-5-D	5	.500	.56	.56	.33	.22
MPSS100-6-C	6	.600	.62	.62	.37	.24
MPSS100-7-C	7	.700	.66	.66	.66	.32
MPSS100-8-C	8	.800	.82	.82	.48	.32
MPSS100-9-C	9	.900	.78	.78	.78	.38
MPSS100-10-C	10	1.000	1.18	.67	.53	.32
MPSS100-11-C	11	1.100	.97	.97	.97	.47
MPSS100-12-C	12	1.200	1.40	.79	.63	.38
MPSS100-13-C	13	1.300	1.15	1.15	1.15	.56
MPSS100-14-C	14	1.400	1.40	1.40	.82	.54

FLAT HEADER, RIGHT ANGLE POST—.025" SQUARE

MFAS100-2-D	2	.200	.22	.22	.22	.11
MFAS100-3-D	3	.300	.33	.33	.19	.13
MFAS100-4-D	4	.400	.33	.33	.33	.16
MFAS100-5-D	5	.500	.41	.41	.41	.20
MFAS100-6-C	6	.600	.49	.49	.49	.24
MFAS100-7-C	7	.700	.65	.65	.38	.25
MFAS100-8-C	8	.800	.66	.66	.66	.32
MFAS100-9-C	9	.900	.74	.74	.74	.36
MFAS100-10-C	10	1.000	.93	.93	.55	.36
MFAS100-11-C	11	1.100	1.02	1.02	.60	.40
MFAS100-12-C	12	1.200	.99	.99	.99	.48
MFAS100-13-C	13	1.300	1.08	1.08	1.08	.54
MFAS100-14-C	14	1.400	1.15	1.15	1.15	.56

LOCKING HEADER, RIGHT ANGLE POST—.025" SQUARE

MLAS100-2-D	2	.200	.29	.29	.17	.11
MLAS100-3-D	3	.300	.46	.26	.21	.12
MLAS100-4-D	4	.400	.70	.40	.32	.19
MLAS100-5-D	5	.500	.93	.53	.42	.26
MLAS100-6-C	6	.600	1.04	.59	.47	.29
MLAS100-7-C	7	.700	.94	.94	.94	.46
MLAS100-8-C	8	.800	1.34	.76	.60	.37
MLAS100-9-C	9	.900	1.18	1.18	.69	.45
MLAS100-10-C	10	1.000	1.52	.86	.69	.42
MLAS100-11-C	11	1.100	1.23	1.23	1.23	.60
MLAS100-12-C	12	1.200	1.31	1.31	1.31	.64
MLAS100-13-C	13	1.300	1.38	1.38	1.38	.68
MLAS100-14-C	14	1.400	1.45	1.45	1.45	.71

POLARIZING HEADER, RIGHT ANGLE POST—.025" SQUARE

MPAS100-2-D	2	.200	.37	.37	.37	.18
MPAS100-3-D	3	.300	.51	.51	.51	.25
MPAS100-4-D	4	.400	.87	.87	.51	.34
MPAS100-5-D	5	.500	1.02	1.02	1.02	.50
MPAS100-6-C	6	.600	1.13	1.13	1.13	.55
MPAS100-7-C	7	.700	1.51	1.51	.89	.59
MPAS100-8-C	8	.800	1.48	1.48	1.48	.73
MPAS100-9-C	9	.900	1.53	1.53	1.53	.75
MPAS100-10-C	10	1.000	1.69	1.69	1.69	.83
MPAS100-11-C	11	1.100	1.74	1.74	1.74	.85
MPAS100-12-C	12	1.200	2.10	2.10	1.23	.82
MPAS100-13-C	13	1.300	1.98	1.98	1.98	.97