

150mA Regulator

Monolithic IC MM157□□N, 161□□N

Outline

This IC is an ultra-small, low noise, stable power supply that supports ceramic capacitors (low ESR) Output current goes up to 150mA, and use of a noise pin reduces output noise even further. Output ON/OFF can be controlled with the ON/OFF pin.

Features

- | | |
|--|--|
| 1. I/O voltage difference | 0.10V typ. ($I_o=50\text{mA}$) |
| 2. Output noise voltage | 30 μV_{rms} typ. ($C_n=0.01\mu\text{F}$) |
| 3. Recommended maximum output current | 150mA max. |
| 4. No-load current consumption | 85 μA typ. |
| 5. Built-in overcurrent protection and thermal shutdown circuits | |
| 6. Output voltage rank | 1.8 ~ 5.0V (0.1V steps) |
| 7. Output ON/OFF control function | High: ON, Low: OFF |

Package


SOT-25A (MM157□□N, MM161□□N)

* □□ contains the output voltage rank.

Applications

1. Cordless telephone
2. Cellular telephone, PHS
3. Portable MD
4. Other battery-powered portable equipment

Pin Assignment



SOT-25A
(TOP VIEW)

MM157□□N


1	V_{IN}
2	GND
3	Cont
4	Noise
5	V_o

MM161□□N



1	Cont
2	GND
3	Noise
4	V_{OUT}
5	V_{IN}

*The component MM161□□N is MM157□□N with changed pin configuration.

Equivalent Circuit Diagram

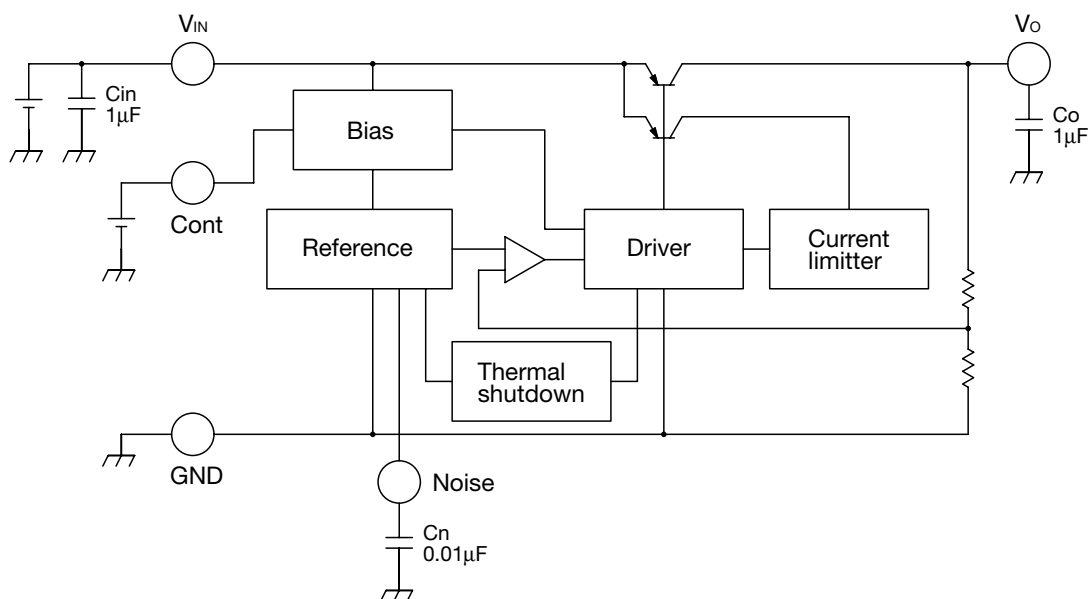

Pin Description Typical model: MM157□□N

Pin No.	Pin name	Function	Internal equivalent circuit diagram						
1	V _{IN}	Input pin The capacitor is required to connect with input pin more than 1μF.							
2	GND	Ground							
3	Cont	ON/OFF Control pin <table border="1" data-bbox="515 1429 820 1565"><tr><td>Cont</td><td>V_O</td></tr><tr><td>H</td><td>ON</td></tr><tr><td>L</td><td>OFF</td></tr></table> Cont pin must be connected with V _{IN} pin, if it is not used.	Cont	V _O	H	ON	L	OFF	
Cont	V _O								
H	ON								
L	OFF								

Pin No.	Pin name	Function	Internal equivalent circuit diagram
4	Noise	Noise decrease pin Connecting 0.01μF capacitor can decrease output noise. If the noise decrease capacitor is not connected, the pin may be influenced by outside noise.	
5	V _O	Output pin The capacitor must be connected with output pin more than 1μF.	

Absolute Maximum Ratings (T_a=25°C)

Item	Symbol	Ratings	Units
Storage temperature	T _{STG}	-40~+150	°C
Operating temperature	T _{OPR}	-30~+85	°C
Supply voltage	V _{IN}	-0.3~+12	V
Allowable loss	P _d	150 (Not attached)	mW

Recommended Operating Conditions

Item	Symbol	Ratings	Units
Output current	I _{OUT}	0~150	mA
Operating voltage	V _{OP}	V _{OUT} Typ. +0.5~+12	V

Electrical Characteristics 1 (Except where noted otherwise, Ta=25°C, VIN=Vo Typ. +1V, Io=1mA, VCONT=2V)

Item	Symbol	Measurement conditions	Min.	Typ.	Max.	Units
No-Load input current	ICC	Io=0mA		85	130	μA
Input current (OFF)	ICCOFF	VCONT=0V		0	0.1	μA
Output voltage	VOUT		×0.98		×1.02	V
Dropout voltage *2	Vio	VIN=Vo-0.2V, Io=50mA		0.1	0.2	V
Line regulation	ΔV1	VIN=Vo Typ. +1~10V		10	20	mV
Load regulation	ΔV2	Io=1~150mA		30	90	mV
VOUT temperature coefficient *1	ΔVOUT/ΔT	Tj=-30~+85°C		100		ppm/°C
Ripple rejection 1 *1	RR1	f=120Hz VRIIPPLE=1V	50	70		dB
Ripple rejection 2 *1	RR2	f=1kHz, Cn=0.01μF VRIIPPLE=1V		60		dB
Output noise voltage *1	Vn	fBW=20~80kHz Cn=0.01μFC		30		μVrms
Cont pin input current	ICONT	VCONT=5V		5	15	μA
Cont pin high threshold level	VCONTH		1.6		VIN+0.3	V
Cont pin low threshold level	VCONTL		-0.3		0.4	V

*1. The parameter is guaranteed by design.

*2. The parameter is not guaranteed in the model less than VOUT=2V

Electrical Characteristics 2 Typical model: MM157□□N

Output Voltage

Product name	Test condisions	Output voltage		
		Min.	Typ.	Max.
MM1571J	Io=1mA	1.764	1.8	1.836
MM1571K		1.862	1.9	1.938
MM1572A		1.960	2.0	2.040
MM1572B		2.058	2.1	2.142
MM1572C		2.156	2.2	2.244
MM1572D		2.254	2.3	2.346
MM1572E		2.352	2.4	2.448
MM1572F		2.450	2.5	2.550
MM1572G		2.548	2.6	2.652
MM1572H		2.646	2.7	2.754
MM1572J		2.744	2.8	2.856
MM1572K		2.842	2.9	2.958
MM1573A		2.940	3.0	3.060
MM1573B		3.038	3.1	3.162
MM1573C		3.136	3.2	3.264
MM1573D		3.234	3.3	3.366
MM1573E		3.332	3.4	3.468
MM1573F		3.430	3.5	3.570
MM1573G		3.528	3.6	3.672
MM1573H		3.626	3.7	3.774
MM1573J		3.724	3.8	3.876
MM1573K		3.822	3.9	3.978


Product name	Test condisions	Output voltage		
		Min.	Typ.	Max.
MM1574A	Io=1mA	3.920	4.0	4.080
MM1574B		4.018	4.1	4.182
MM1574C		4.116	4.2	4.284
MM1574D		4.214	4.3	4.386
MM1574E		4.312	4.4	4.488
MM1574F		4.410	4.5	4.590
MM1574G		4.508	4.6	4.692
MM1574H		4.606	4.7	4.794
MM1574J		4.704	4.8	4.896
MM1574K		4.802	4.9	4.998
MM1575A		4.900	5.0	5.100

* Rank is indicated inside □□ for MM161□□N.

Example: MM1613N is 3.9V typ.


Measuring Circuit

Typical model: MM157□□N

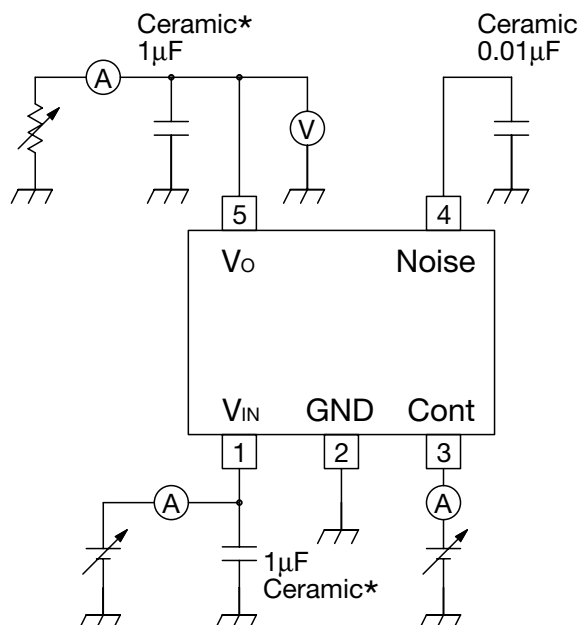

Application Circuit

Typical model: MM157□□N

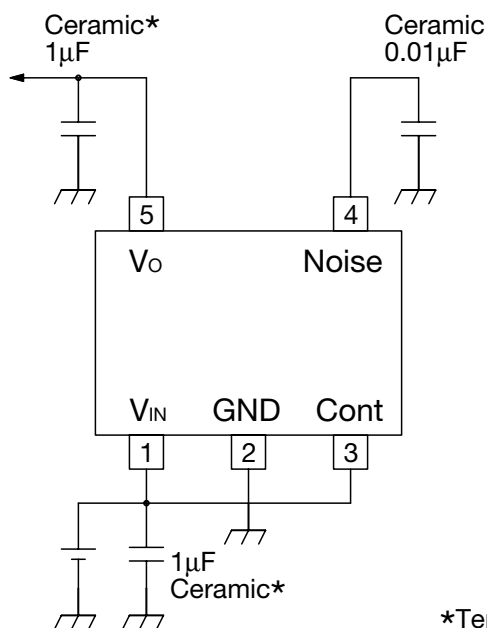


*Temperature Characteristics: B Type

Note


1. The output capacitor is required between output and GND to prevent oscillation.
2. Use a capacitance that is within the ESR characteristics stable range for output capacity.
It is possible to use a ceramic capacitor without ESR resistance for output.
The ceramic capacitor must be used more than 1μF and B type temperature characteristics.
3. The wire of Vcc and GND is required to print full ground plane for noise and stability.
4. The input capacitor must be connected a distance of less than 1cm from input pin.

Characteristics
 (2.8V product Except where noted otherwise, $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=V_o+1\text{V}$, $V_{\text{CONT}}=2\text{V}$, $C_{\text{IN}}=1\mu\text{F}$, $C_o=1\mu\text{F}$, $C_n=0.01\mu\text{F}$)


Output-Input Voltage

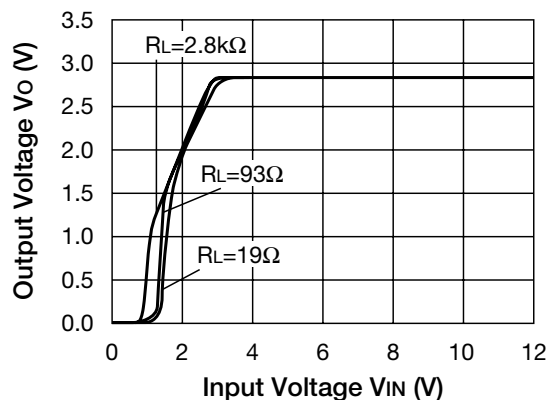


Input Current-Input Voltage

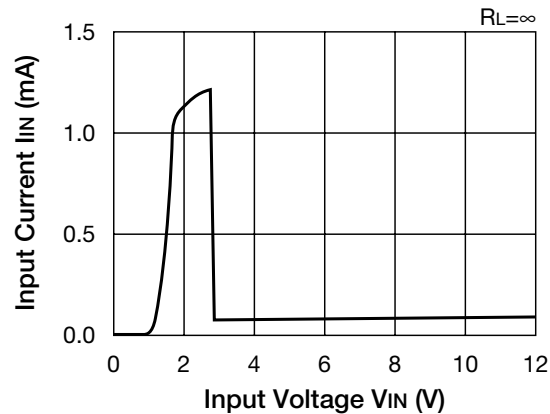


Load Regulation

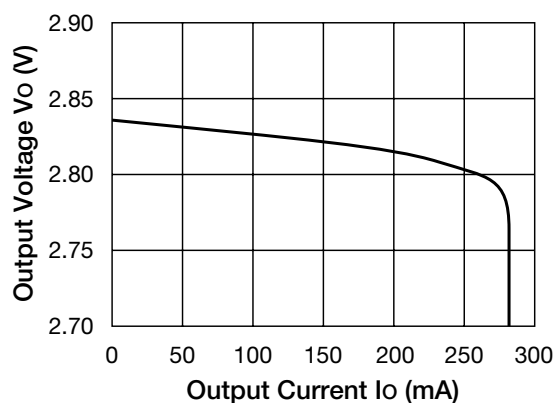


Line Regulation

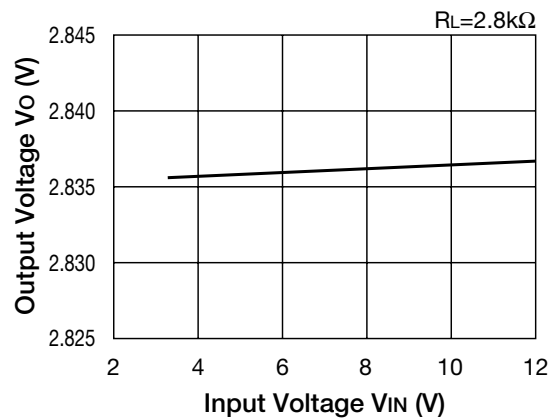


Dropout Voltage-Output Current

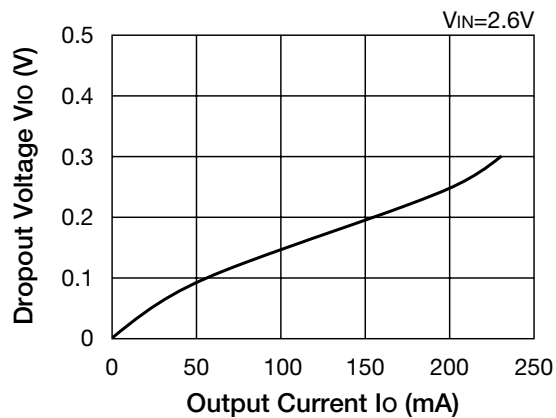


Output Voltage- Ambient Temperature

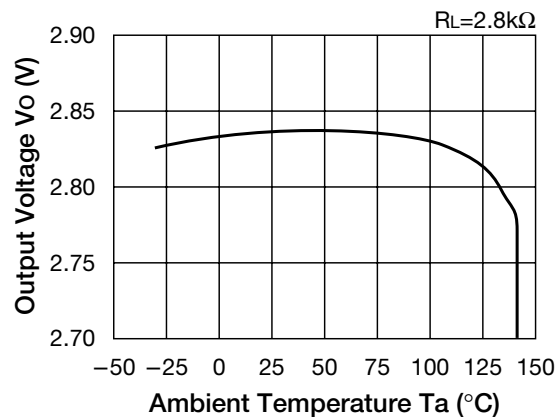


Ripple Rejection

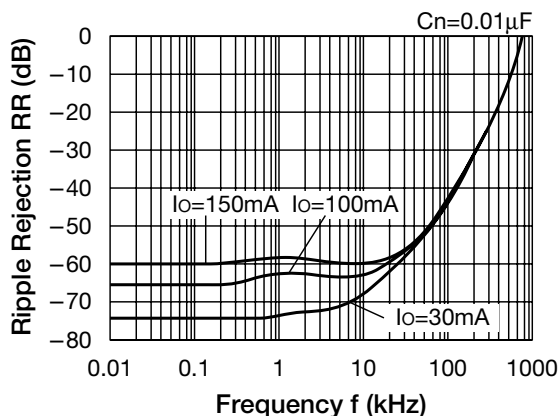


Ripple Rejection

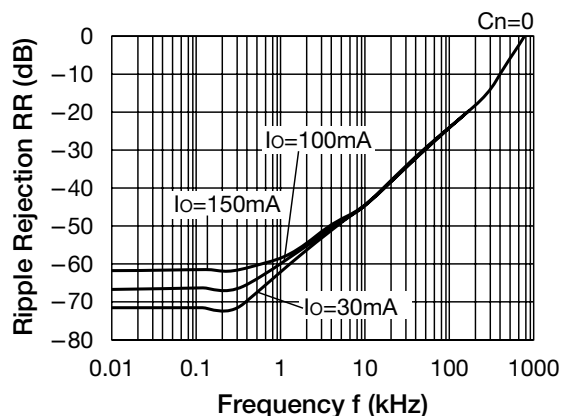


GND Pin Current

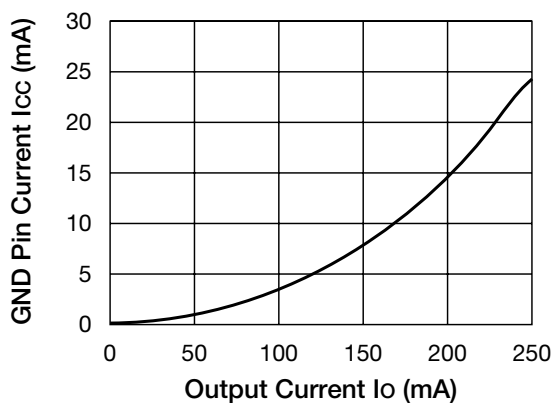


Output Noise Voltage

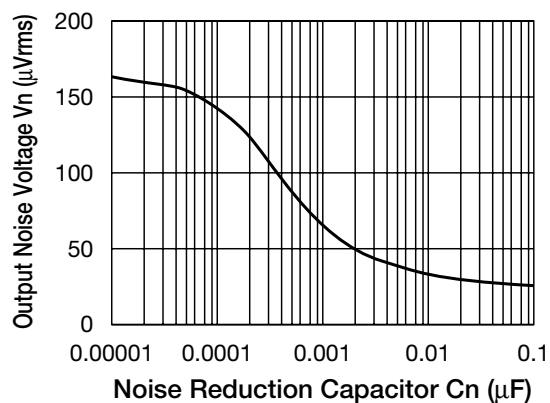


ESR Stability Area

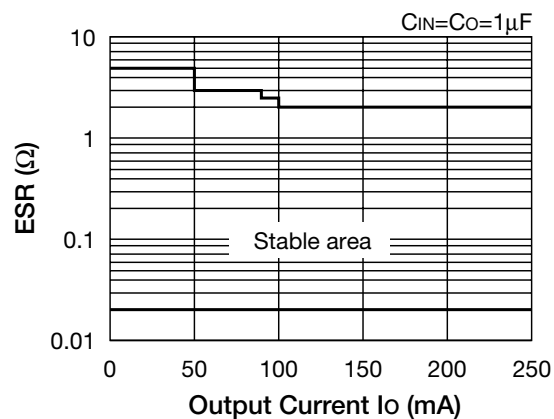


ESR Stability Area

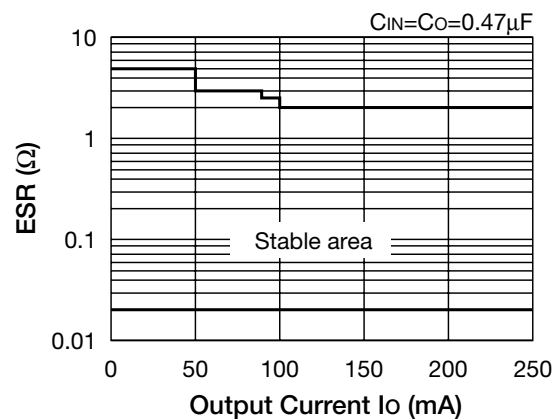


Load Transient Responses ($I_o=0 \rightarrow 100\text{mA}$)

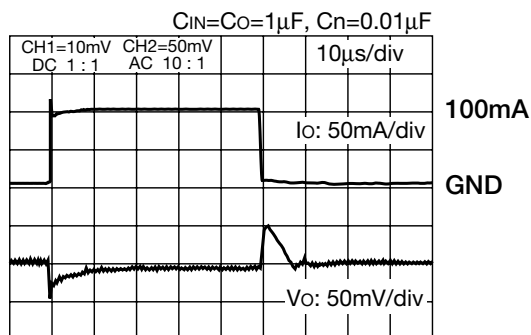


Load Transient Responses ($I_o=0 \rightarrow 100\text{mA}$)

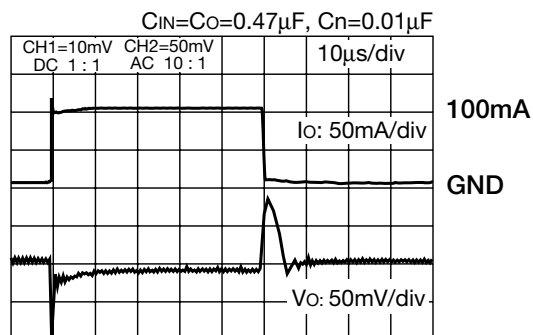


**Line Transient Responses
 ($V_{IN}=3.8 \rightarrow 4.8\text{V}$, $I_o=30\text{mA}$)**

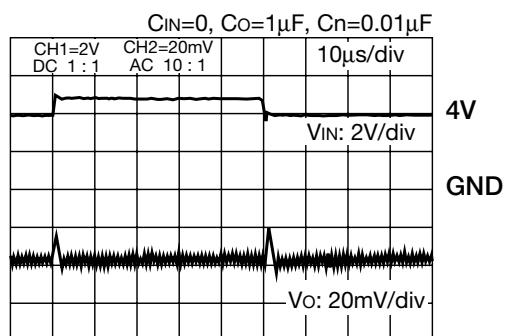


**Line Transient Responses
 ($V_{IN}=3.8 \rightarrow 4.8\text{V}$, $I_o=30\text{mA}$)**

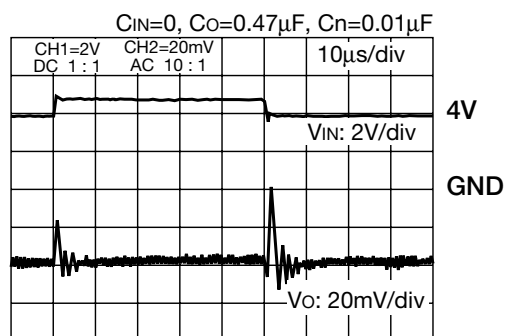

Turn-On Transient Responses

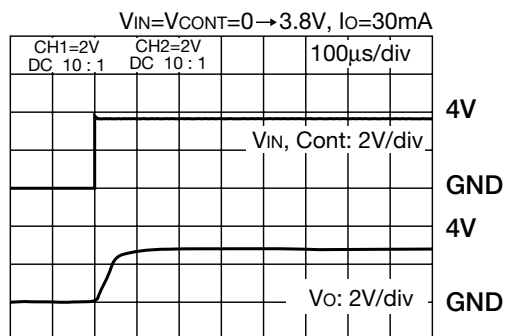


Turn-On Transient Responses

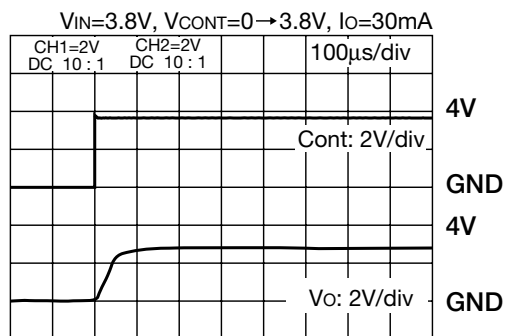


Characteristics (1.8V product Except where noted otherwise, $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=V_o+1\text{V}$, $V_{\text{CONT}}=2\text{V}$, $C_{\text{IN}}=1\mu\text{F}$, $C_o=1\mu\text{F}$, $C_n=0.01\mu\text{F}$)


Output-Input Voltage

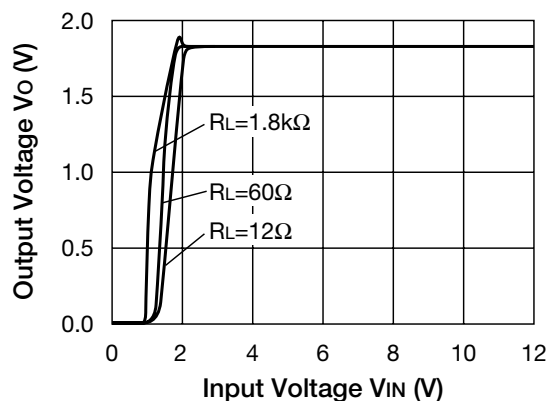


Load Regulation

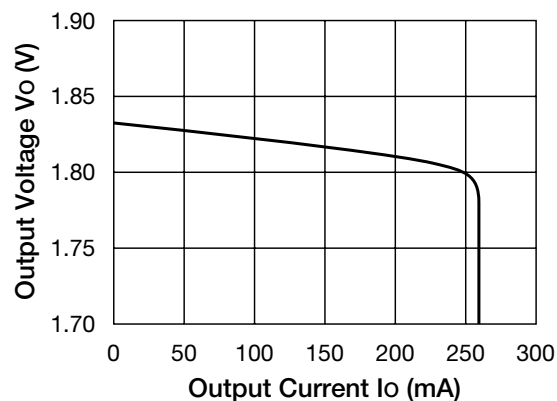


Line Regulation

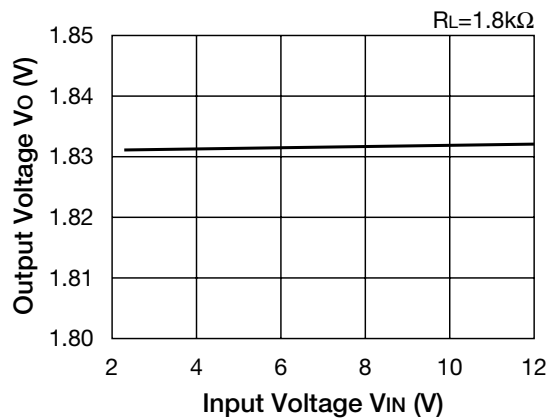


Output Voltage- Ambient Temperature

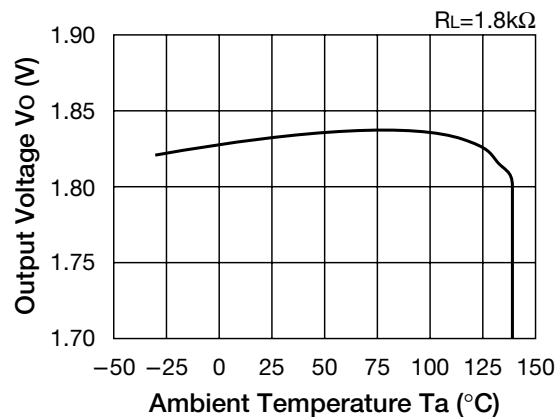

ESR Stability Area

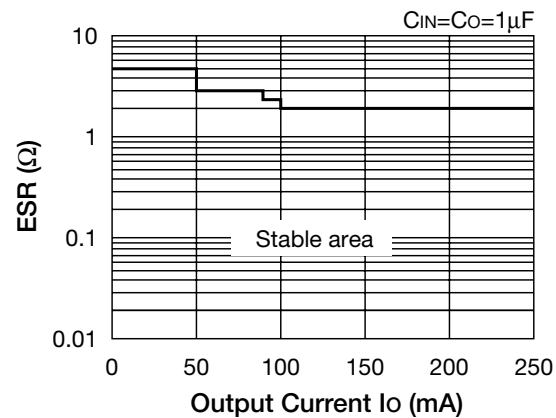


ESR Stability Area

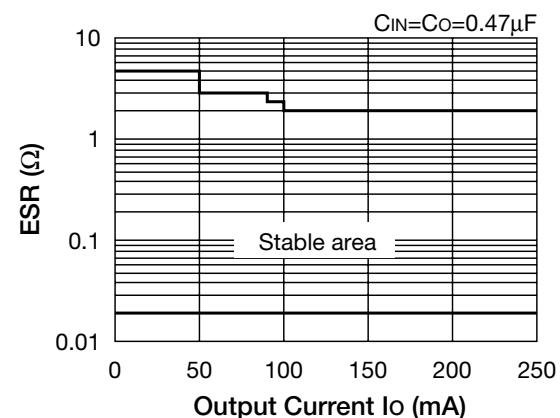


Characteristics
 (3.5V product Except where noted therwise, $T_a=25^{\circ}\text{C}$, $V_{\text{IN}}=V_{\text{O}}+1\text{V}$, $V_{\text{CONT}}=2\text{V}$, $C_{\text{IN}}=1\mu\text{F}$, $C_{\text{O}}=1\mu\text{F}$, $C_{\text{n}}=0.01\mu\text{F}$)


Output-Input Voltage

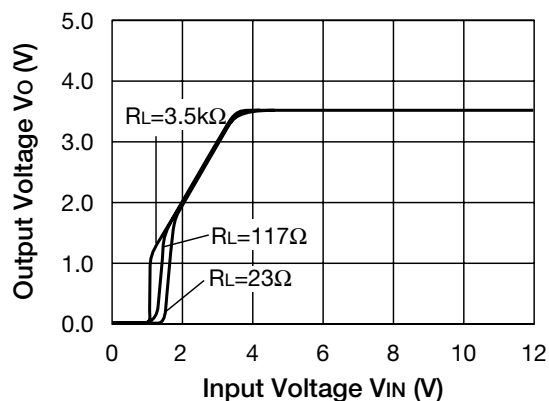


Load Regulation

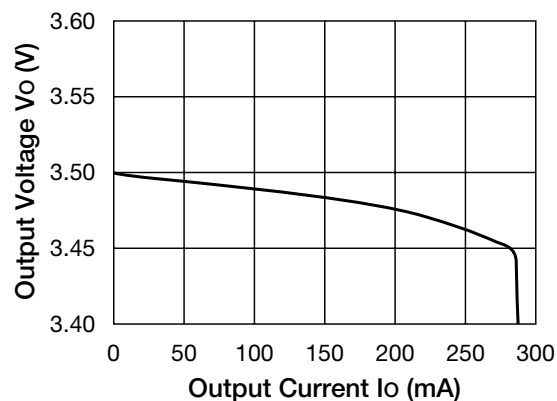


Line Regulation

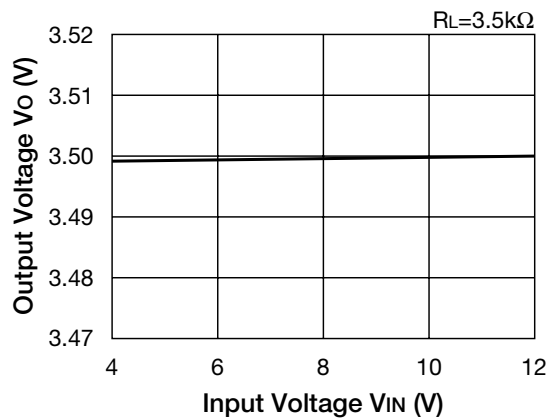

Output Voltage- Ambient Temperature

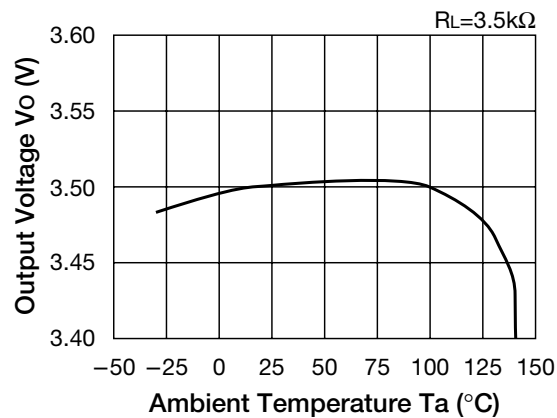

ESR Stability Area

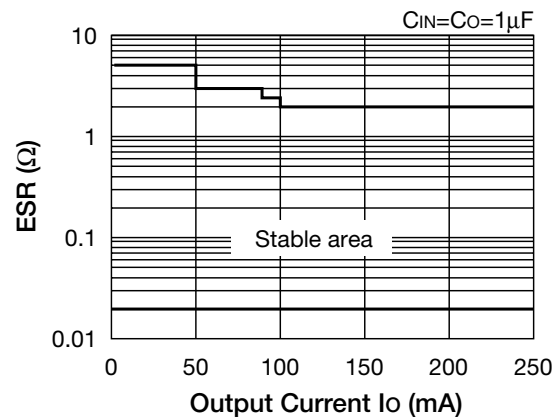

ESR Stability Area

