

M-Pulse Microwave

Silicon Bipolar MMIC Cascadable Amplifier

MP4TD0600

Features


- Cascadable 50 Ω Gain Block
- 3dB Bandwidth: DC to 0.8 GHz
- 18.5 dB Typical Gain @ 0.5 GHz
- Unconditionally Stable ($k > 1$)
- Low Voltage Operation

Description

M-Pulse's MP4TD0600 is a high performance silicon bipolar MMIC chip. The MP4TD0600 is designed for use where a general purpose 50 Ω gain block is required. Typical applications include narrow and wide band IF and RF amplifiers in industrial and military applications.


The MP4TD0600 is fabricated using a 10 GHz f_T silicon bipolar technology that features gold metalization and IC passivation for increased performance and reliability.

TYPICAL POWER GAIN vs FREQUENCY

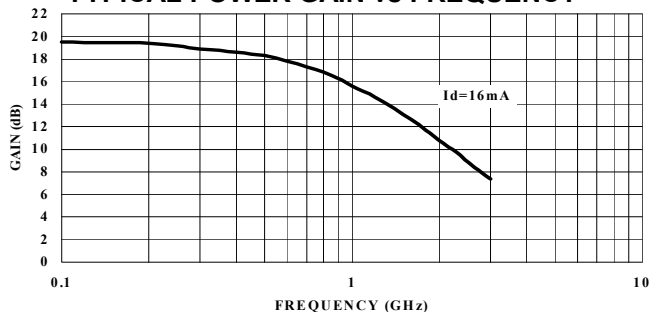

www.DataSheet4U.com

Chip Outline Drawing^{1,2,3,4}

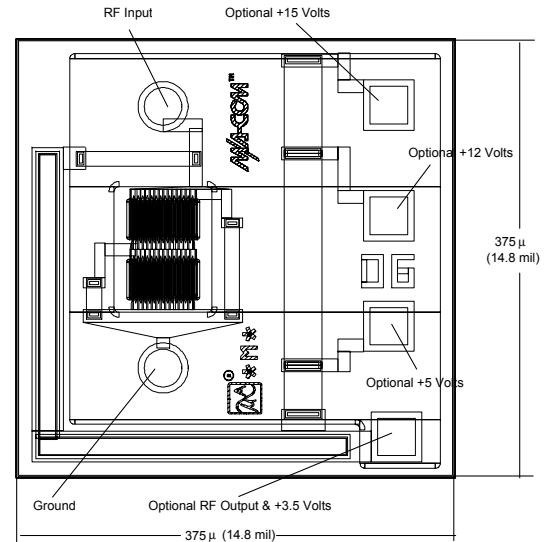

Notes: (unless otherwise specified)

1. Chip Thickness is 120 μm ; 4.8 mils
2. Bond Pads are 40 μm ; 1.6 mils typical in diameter
3. Output Contact & +DC Voltage Is Normally Made On Backside Of Chip At Die Attach
4. Tolerance: μm .xx = ± 13 ; mil .x = ± 5

Ordering Information

Model No.	Type of Carrier
MP4TD0600G	GEL PACK
MP4TD0600W	Waffle Pack

Electrical Specifications @ $T_A = +25^\circ\text{C}$, $I_d = 16 \text{ mA}$, $Z_0 = 50\Omega$

Symbol	Parameters	Test Conditions	Units	Min.	Typ.	Max.
Gp	Power Gain ($ S_{21} ^2$)	$f = 0.1 \text{ GHz}$	dB	-	20.0	-
ΔG_p	Gain Flatness	$f = 0.1 \text{ to } 0.6 \text{ GHz}$	dB	-	± 0.7	-
$f_{3\text{dB}}$	3 dB Bandwidth	-	GHz	-	0.8	-
SWR _{in}	Input SWR	$f = 0.1 \text{ to } 1.5 \text{ GHz}$	-	-	2.0	-
SWR _{out}	Output SWR	$f = 0.1 \text{ to } 2.0 \text{ GHz}$	-	-	1.8	-
P _{1dB}	Output Power @ 1 dB Gain Compression	$f = 0.5 \text{ GHz}$	dBm	-	3.0	-
NF	50 Ω Noise Figure	$f = 0.5 \text{ GHz}$	dB	-	3.0	-
IP ₃	Third Order Intercept Point	$f = 0.5 \text{ GHz}$	dBm	-	14.5	-
t _D	Group Delay	$f = 0.5 \text{ GHz}$	ps	-	200	-
V _d	Device Voltage	-	V	3.1	3.5	3.9
dV/dT	Device Voltage Temperature Coefficient	-	mV/ $^\circ\text{C}$	-	-8.0	-

Specification Subject to Change Without Notice




M-Pulse Microwave

Absolute Maximum Ratings¹



Parameter	Absolute Maximum
Device Current	50 mA
Power Dissipation ^{2,3}	200 mW
RF Input Power	+20 dBm
Junction Temperature	200°C
Storage Temperature	-65°C to +200°C
Thermal Resistance: $\theta_{jc} = 50^\circ\text{C/W}$	

- Exceeding these limits may cause permanent damage.
- Case Temperature (T_c) = 25 °C.
- Derate for at 20 mW/°C for $T_c > 190^\circ\text{C}$.



Typical Bias Configuration

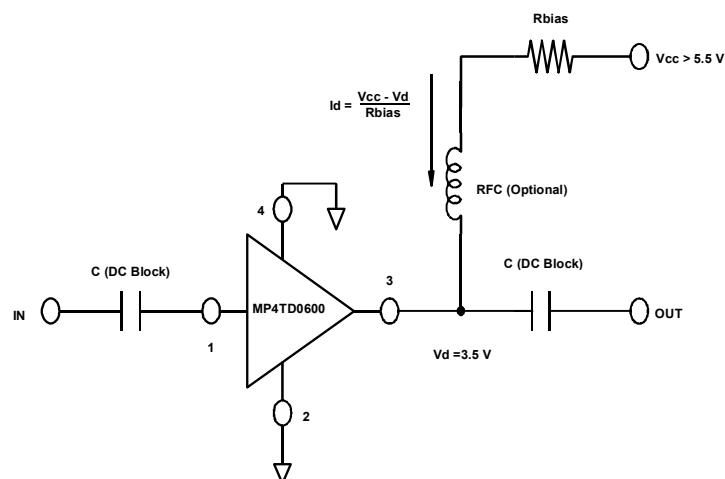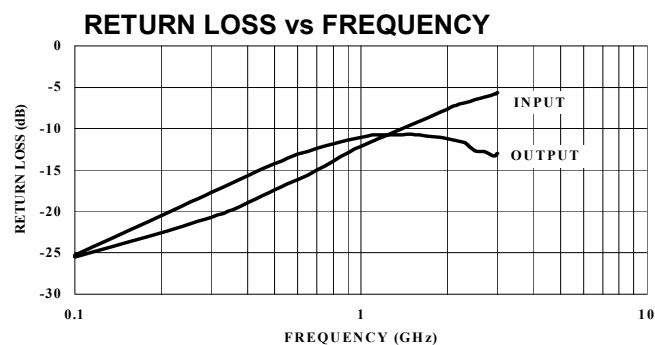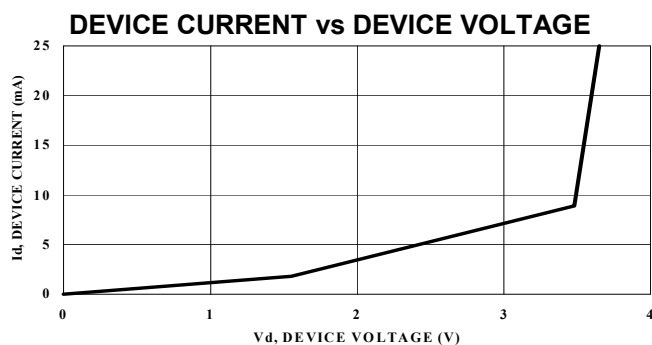Typical Performance Curves @ $I_d = 16\text{ mA}$, $T_A = +25^\circ\text{C}$ (unless otherwise noted)

www.DataSheet4U.com

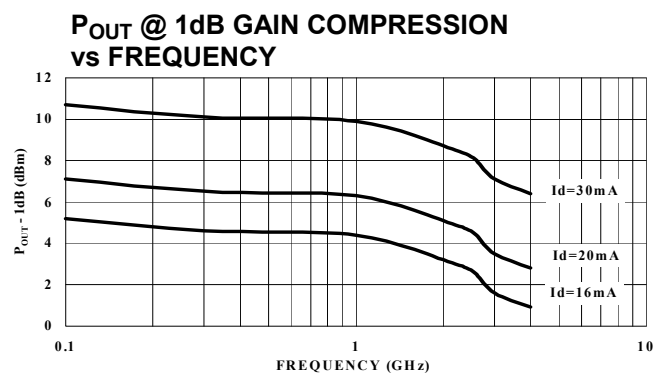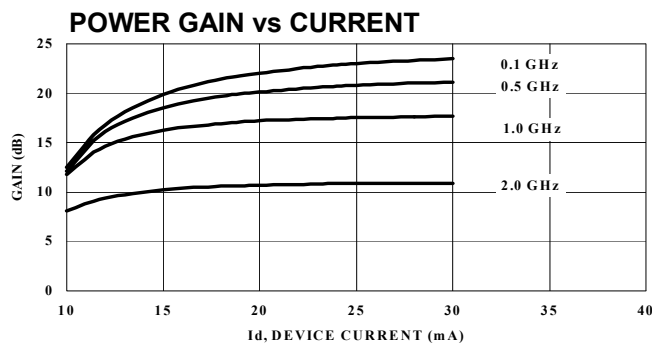

Specification Subject to Change Without Notice

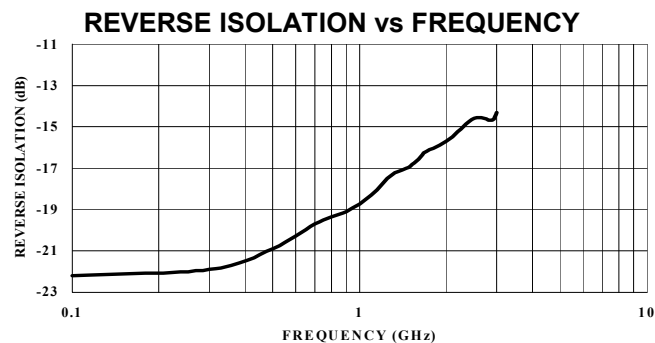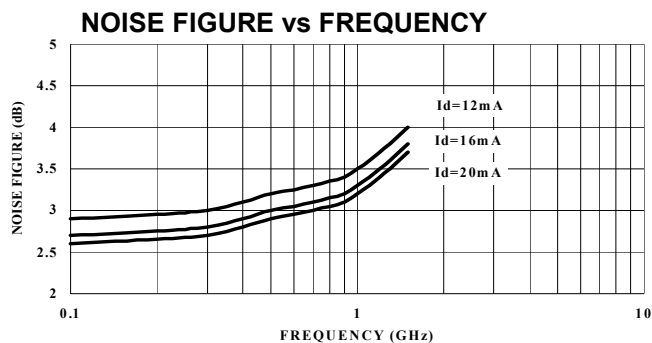

Typical Scattering Parameters

$Z_0 = 50\Omega$, $T_A = +25^\circ\text{C}$, $I_d = 16\text{ mA}$

Frequency (GHz)	S11		S22		S12		S22	
	Mag.	Angle	Mag.	Angle	Mag.	Angle	Mag	Angle
0.1	0.055	-153.1	9.47	171.0	0.076	5.8	0.053	-55.9
0.2	0.068	-148.6	9.30	162.3	0.077	8.4	0.092	-79.0
0.3	0.094	-134.8	8.90	154.3	0.080	16.3	0.131	-101.8
0.4	0.111	-135.4	8.57	146.3	0.083	20.2	0.165	-113.0
0.5	0.134	-133.4	8.29	138.8	0.089	24.9	0.194	-123.2
0.6	0.156	-138.3	7.78	131.9	0.096	27.3	0.215	-135.2
0.7	0.175	-139.3	7.41	125.1	0.103	28.2	0.237	-142.7
0.8	0.200	-140.2	6.93	119.4	0.106	30.6	0.254	-153.5
9.0	0.224	-143.2	6.54	114.0	0.109	31.2	0.266	-159.7
1.0	0.243	-147.8	6.09	109.0	0.118	33.8	0.277	-167.4
1.5	0.334	-164.4	4.55	87.9	0.143	36.5	0.292	167.5
2.0	0.408	177.9	3.48	73.0	0.163	35.7	0.278	148.9
2.5	0.474	163.1	2.79	60.9	0.183	36.2	0.236	135.8
3.0	0.513	150.8	2.34	52.9	0.191	38.3	0.218	130.1

Specification Subject to Change Without Notice