

FEATURES

- Sampling Rates from 0.001 to 15 MHz (MSPS)
- Interface to any Analog Input Range between GND and V_{DD}
- Monotonic; No Missing Codes
- Single Power Supply (4 to 6 Volt)
- Low Power CMOS (150 mW typ.)
- ESD Protection: 2000 Volts Minimum
- Latch-Up Free

BENEFITS

- High Conversion Speed at Low Power
- Most Flexible Input Range of any A/D Available
- No Sample/Hold Needed
- Easy Ping-Pong for 30 MSPS System

GENERAL DESCRIPTION


The MP7682 is a 6-bit monolithic CMOS single step flash Analog-to-Digital Converter designed for precision 6-bit applications in video, scanning and data acquisition requiring conversion rates to 15 MHz. Differential Linearity error is less than 1/2 LSB at 10 MHz, and power consumption is 150 mW, typical.

The MP7682 has a unique input architecture which eliminates the need for an input track and hold and allows full scale input ranges from about 1 to 5 volts peak-to-peak, referred to ground or offset. The user

simply sets $V_{REF(-)}$ and $V_{REF(+)}$ to encompass the desired input range.

MP7682 includes 64 auto-balanced clocked comparators, an encoder, 3-state output buffers, a reference resistor ladder, and associated timing circuitry. An overflow bit (or flag) has been provided to make it possible to achieve 7-bit resolution by connecting two devices in series. In normal operation this flag has no effect on the data bits.

SIMPLIFIED BLOCK AND TIMING DIAGRAM

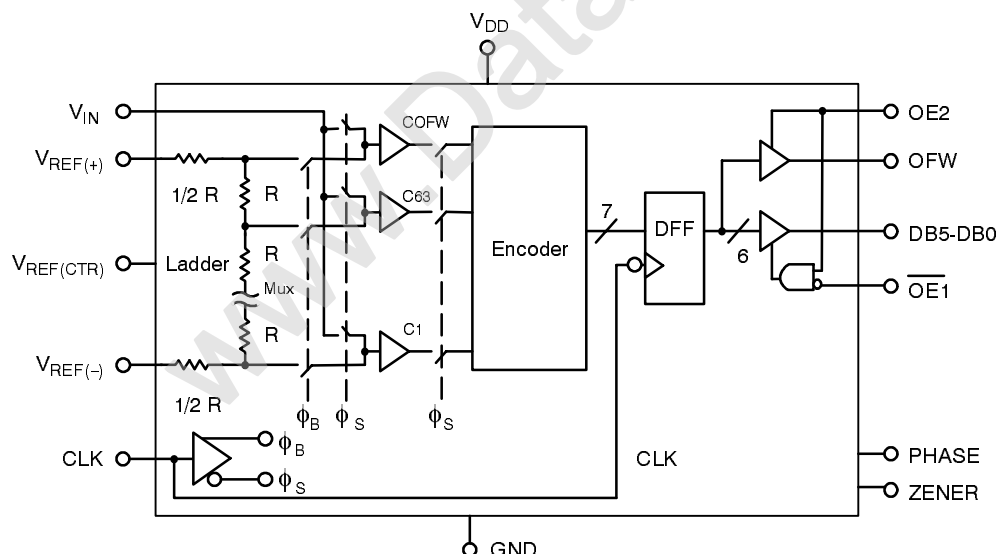


ORDERING INFORMATION


Package Type	Temperature Range	Part No.	DNL (LSB)	INL (LSB)
Plastic Dip	-40 to +85°C	MP7682JN	±2	±2
Plastic Dip	-40 to +85°C	MP7682KN	±1	±1
SOIC	-40 to +85°C	MP7682JS	±2	±2
SOIC	-40 to +85°C	MP7682KS	±1	±1
Ceramic Dip	-55 to +125°C	MP7682SD	±2	±2

PIN CONFIGURATIONS

See Packaging Section for Package Dimensions

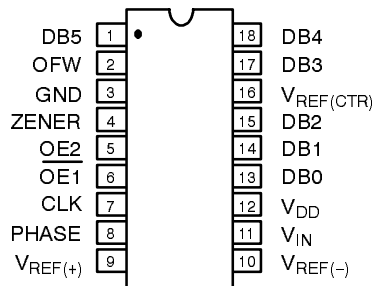

18 Pin CDIP, PDIP (0.300")

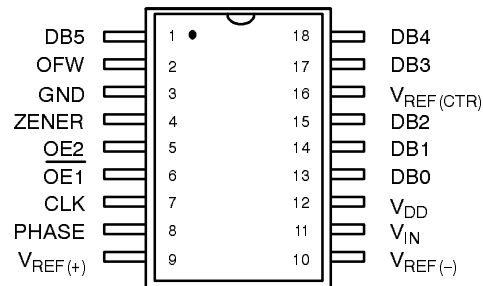

18 Pin SOIC (0.300", Jedec)

PIN OUT DEFINITIONS

PIN NO.	NAME	DESCRIPTION
1	DB5	Data Output Bit 5 Output (MSB)
2	OFW	Digital Output Overflow
3	GND	Ground
4	ZENER	On Chip Zener Output
5	OE2	Output Enable Control
6	OE1	Output Enable Control
7	CLK	Clock Input
8	PHASE	Sampling Clock Phase Control
9	VREF(+)	Reference Voltage (+) Input

PIN NO.	NAME	DESCRIPTION
10	VREF(-)	Reference Voltage (-) Input
11	VIN	Analog Input
12	VDD	Power Supply
13	DB0	Data Output Bit 0 Output (LSB)
14	DB1	Data Output Bit 1 Output
15	DB2	Data Output Bit 2 Output
16	VREF(CTR)	R Ladder Mid Point
17	DB3	Data Output Bit 3 Output
18	DB4	Data Output Bit 4 Output

ELECTRICAL CHARACTERISTICS TABLE

Unless Otherwise Specified: $V_{DD} = 5\text{ V}$, $F_S = 15\text{ MHz}$ (Duty Cycle: 1/3 Sample & 2/3 Balance),

$V_{REF(+)} = 4.1$, $V_{REF(-)} = \text{GND}$, $T_A = 25^\circ\text{C}$

Parameter	Symbol	25° C			Tmin to Tmax		Units	Test Conditions/Comments
Min	Typ	Max	Min	Max				
KEY FEATURES								
Resolution		6			6		Bits	
Sampling Rate	F _S	0.001		15	0.001	15	MHz	
ACCURACY (J, S Grades) ¹								
Differential Non-Linearity	DNL			±1		±2	LSB	Best Fit Line (Max INL – Min INL) / 2
Integral Non-Linearity	INL			±1		±2	LSB	
(Relative Accuracy)								
Zero Scale Error	EZS		±1.7				LSB	
Full Scale Error	EFS		±1.7				LSB	
ACCURACY (K, T Grades) ¹								
Differential Non-Linearity	DNL			±1/2		±1	LSB	Best Fit Line
Integral Non-Linearity	INL			±1/2		±1	LSB	
Zero Scale Error	EZS		±1.7				LSB	
Full Scale Error	EFS		±1.7				LSB	
REFERENCE VOLTAGES								
Positive Ref. Voltage	V _{REF(+)}			5			V	
Negative Ref. Voltage	V _{REF(-)}	GND			GND		V	
Differential Ref. Voltage ³	V _{REF}	1.0	V _{DD} -GND		V _{DD} -GND		V	
Ladder Resistance	R _L	175		500	150	600	Ω	
Ladder Temp. Coefficient ²	R _{TCO}					3000	ppm/°C	
ANALOG INPUT ²								
Input Voltage Range	V _{IN}	V _{REF(-)}		V _{REF(+)}	V _{REF(-)}	V _{REF(+)}	V p-p	
Input Impedance	Z _{IN}		3				MΩ	
Input Capacitance Sample ⁵	C _{INA}		30				pF	
Aperture Delay	t _{AP}		20				ns	
Aperture Uncertainty (Jitter)	t _{AJ}		220				ps	
DIGITAL INPUTS								
Logical “1” Voltage	V _{IH}	3.5			3.5		V	V _{IN} =GND to V _{DD}
Logical “0” Voltage	V _{IL}			0.4		0.4	V	
Leakage Currents								
CLK	I _{IN}			±1		±30	μA	
OE2				±1		±30	μA	
OE1				±1		±30	μA	
Phase				±1		±30	μA	
Input Capacitance ²	C _{IND}		5				pF	
Clock Timing (See NO TAG)								
Clock Period	t _S	66					ns	
“High” Time	t _H	33					ns	
“Low” Time	t _L	33					ns	
Duty Cycle			50				%	

ELECTRICAL CHARACTERISTICS TABLE CONT'D

Parameter	Symbol	25°C			Tmin to Tmax		Units	Test Conditions/Comments
		Min	Typ	Max	Min	Max		
DIGITAL OUTPUTS								
Logical "1" Voltage	V _{OH}	4.3			4.3		V	I _{LOAD} = - 1.0 mA I _{LOAD} = 2.0 mA V _{OUT} = GND to V _{DD}
Logical "0" Voltage	V _{OL}			0.6		0.6	V	
3-state Leakage	I _{OZ}	±1			±20		μA	
Data Valid Delay ²	t _{DL}		66				ns	
Data Enable Delay ²	t _{DEN}		20				ns	
Data 3-state Delay ²	t _{DHZ}		26				ns	
Output Capacitance ²	C _O		5				pF	
POWER SUPPLIES								
Operating Voltage	V _{DD}	4		6	4	6	V	
Current	I _{DD}		20	30		50	mA	

Notes:

¹ Tester measures code transitions by dithering the voltage of the analog input (V_{IN}). The difference between the measured and the ideal code width (V_{REF}/64) is the DNL error (Figure 3.). The INL error is the maximum distance (in LSBs) from the best fit line to any transition voltage (Figure 4.). Accuracy is a function of the sampling rate (F_S).

² Guaranteed. Not tested.

³ Specified values guarantee functionality. Refer to other parameters for accuracy.

⁴ 3 dB bandwidth is a measure of performance of the A/D input stage (S/H + amplifier). Refer to other parameters for accuracy within the specified bandwidth.

⁵ See V_{IN} input equivalent circuit (Figure 5.). Switched capacitor analog input requires driver with low output resistance.

Specifications are subject to change without notice

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C unless otherwise noted)^{1, 2}

V _{DD} to GND	 +7 V	Storage Temperature	 -65°C to +150°C
V _{REF} (+) & V _{REF} (-)	 GND -0.5 to V _{DD} +0.5 V	Lead Temperature (Soldering 10 seconds)	 +300°C
V _{IN}	 GND -0.5 to V _{DD} +0.5 V	Package Power Dissipation Rating to 75°C	
Digital Inputs	 GND -0.5 to V _{DD} +0.5 V	CDIP, PDIP, SOIC	 850mW
Digital Outputs	 GND -0.5 to V _{DD} +0.5 V	Derates above 75°C	 11mW/°C

Notes:

¹ Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation at or above this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

² Any input pin which can see a value outside the absolute maximum ratings should be protected by Schottky diode clamps (HP5082-2835) from input pin to the supplies. All inputs have protection diodes which will protect the device from short transients outside the supplies of less than 100mA for less than 100μs.

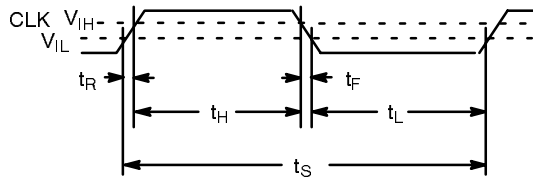


Figure 1. Clock Timing Specification
($t_R = t_F = 10 \text{ ns}$ typical)

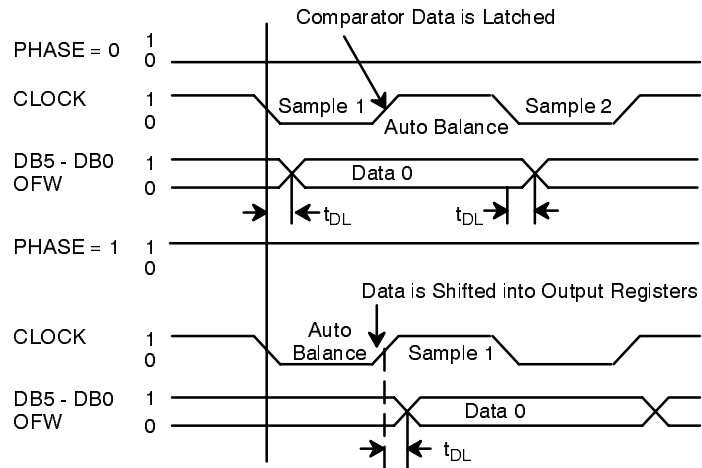


Figure 2. Data Line Enable Delay

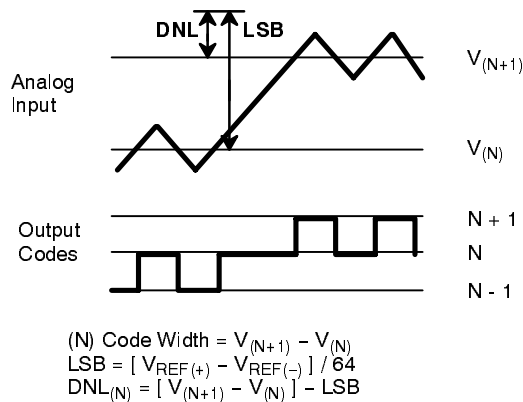


Figure 3. DNL Measurement


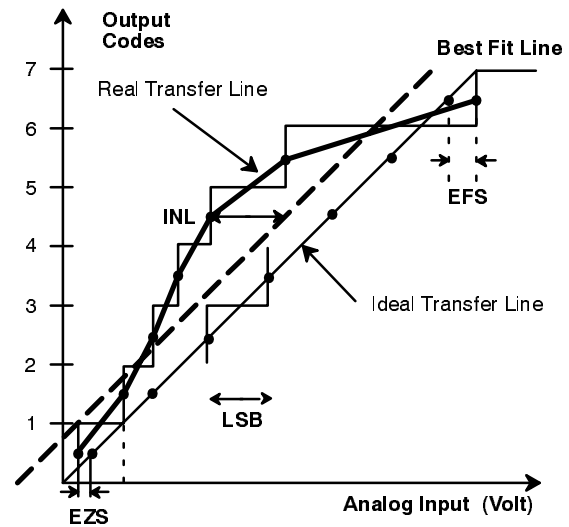


Figure 4. INL Error Calculation




$\overline{\text{OE1}}$	OE2	DB0 - DB5	OFW
0	1	Valid	Valid
1	1	3-State	Valid
X	0	3-State	3-State

Table 1. Truth Table

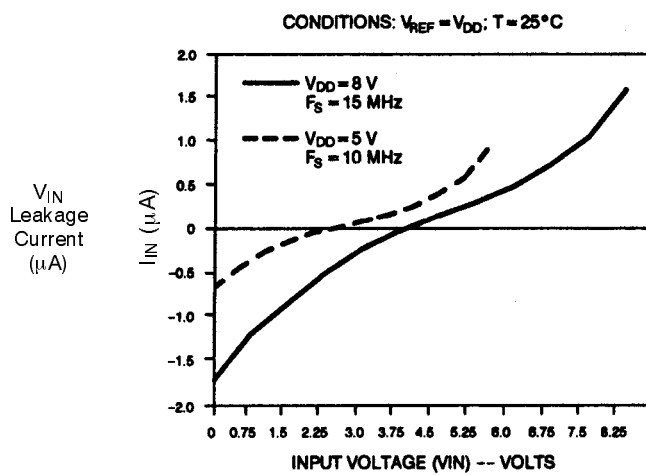

Graph 1. Analog Input Current
vs. Input Voltage

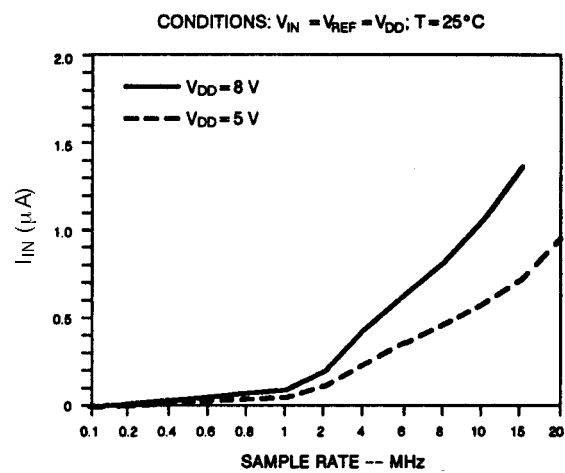

Graph 2. Analog Input Current
vs. Sample Rate