
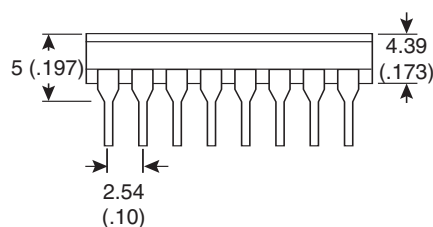
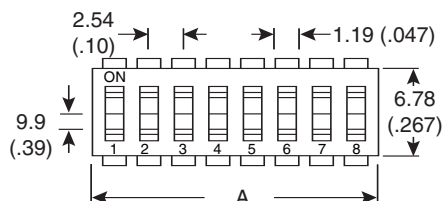



## Dimensions: mm (In.)



www.DataSheet4U.com

Mouser Stock No.	Position	Dimension "A" (In.)
106-1222	2	.198
106-1224	4	.398
106-1228	8	.881

**Electrical Specifications:**

- Electrical life: 2,000 operations min.
- Rating: Non-switching: 50VDC / 100mA,  
Switching rating: 50mA / 24VDC
- Contact resistance: 30mΩ max. initial  
100mΩ max. @ end of life
- Insulation resistance: 100M min. @ end of life
- Dielectric strength: 500VDC for 1 minute
- Capacitance: 5pF max. between adjacent closed switch.
- Frequency: 1MHz

**Mechanical Specifications:**

- Type: SPST
- Mechanical life: 5,000 operations min.
- Operation force: <800g
- Stroke: 1.0mm
- Operation & storage temperature: -40°C~ +85°C

**Ultra-Low Profile DIP Switches**  
106-1222, 106-1224, 106-1228

**Mountain  
Switch**