

SPECIFICATIONS

Switch Function	DPDT
Electrical Ratings	500mA @ 15VDC
Electrical Life	10,000 cycles typical
Contact Resistance	< 50 mΩ initial
Actuation Force	250 +/- 100gF
Actuator Travel	2.0 mm total
Dielectric Strength	1000Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature	-40°C to 85°C
Storage Temperature	-40°C to 85°C



MATERIALS ←RoHS COMPLIANT

Actuator	Acetal
Housing	Steel
Base	Phenolic
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated


ORDERING INFORMATION

1. Series:	MS2208	L4
MS2208		
2. Actuator Length:		
L4 = 4mm		
L6 = 6mm		
L9 = 9mm		

DataSheet4U.com

DataSheet4U.com

DIMENSIONS

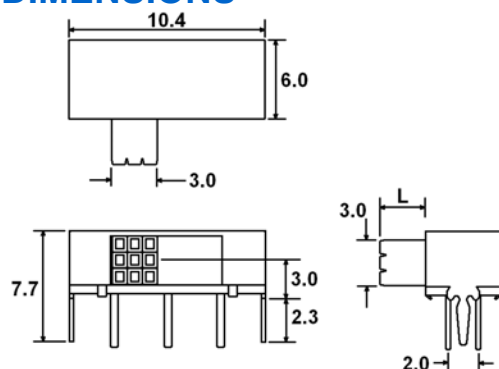

SCHEMATIC & PC LAYOUT

